www.okocart.com / www.okocart.us / www.okocart.cn

OKO

Our Product Matters!

OKO Cart | OKO Pallet Lift

Ergonomic Elevating Carts and Pallet Lift Turn Table
Patented Spring & Gas Pneumatic Resistance
"SGPR" Technology System

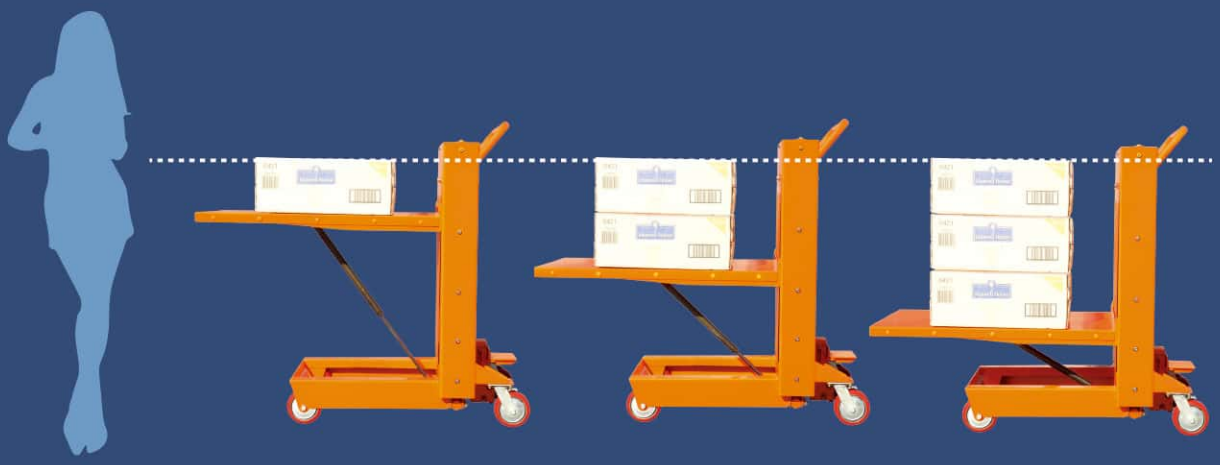

U.S. and International Sales Office

E-mail : contact@okocart.com
Phone : +1-310-684-9815
Address : 15271 S. Western Ave. Gardena, CA 90249

Always keep at waist high!
Reliable and durability

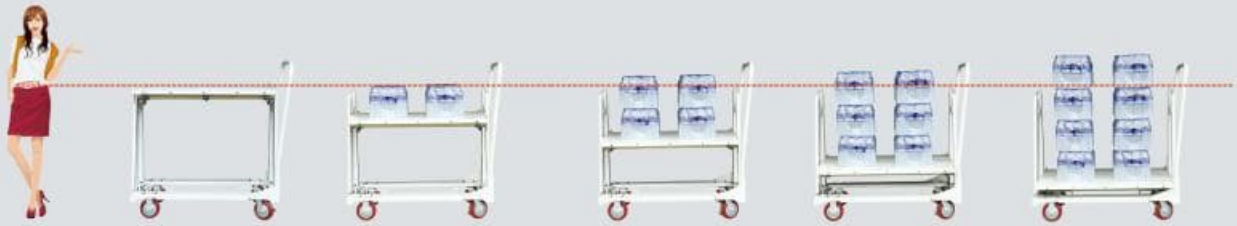

OKO Cart

OKO Pallet Lift

Prevents Back Injury

No Manual Foot Pump

No Electronic Power Needed

CO_2 Zero CO2 Gas Emission

X2 Increase Productivity

Blow Away Competition

OK-0 Functional Safety

BACK INJURY FACTS

U.S. Department of Labor

Fact Sheet No. OSHA 89-09

BACK INJURIES - NATION'S #1 WORKPLACE SAFETY PROBLEM

The National Institute for Occupational Safety and Health (NIOSH)

Back injuries account for nearly 20% of all injuries and illnesses in the workplace and cost the nation an estimated 20 to 50 billion dollars per year.

U.S. Department of Labor

U.S. Bureau of Labor Statisics

Workers who sustained injuries or illnesses as the result of overexertion in lifting or lowering required a median of 23 days away from worknearly 3 times as many days for all types of injuries.

Harvard Business School

Workplace safety is the basis from which productivity, retention, quality of output, employee engagement and ultimately, employer attractiveness is derived.

Model	MINI
Product Specification	(W)520mm X (D)650mm X (H)820mm Stroke: 520mm (W)20" X (D)25" X (H)32" Stroke: 20"
Feature	Three level weight adjustment (Light : 60kg, Middle : 150kg, Heavy : 300kg) (Light : 130LB, Middle : 330LB, Heavy : 660LB)

Model	STANDARD
Product Specification	(W)520mm X (D)900mm X (H)820mm Stroke: 520mm (W)20" X (D)35" X (H)32" Stroke: 20"
Feature	Three level weight adjustment (Light : 60kg, Middle : 150kg, Heavy : 300kg) (Light : 130lb, Middle : 330lb, Heavy : 660LB)

Model	U-BOAT 47"
Product Specification	(W)420mm X (D)1200mm X (H)820mm Storke: 520mm (W)16" X (D)47" X (H)32" Storke: 20"
Feature	Three level weight adjustment (Light : 60kg, Middle : 150kg, Heavy : 300kg) (Light : 130LB, Middle : 330LB, Heavy : 660LB)

Model	U-BOAT 60"
Product Specification	(W)420mm X (D)1540mm X (H)820mm Storke: 520mm (W)16" X (D)60" X (H)32" Storke: 20"
Feature	Three level weight adjustment (Light : 60kg, Middle : 150kg, Heavy : 300kg) (Light : 130LB, Middle : 330LB, Heavy : 660LB)

OKO Cart Function

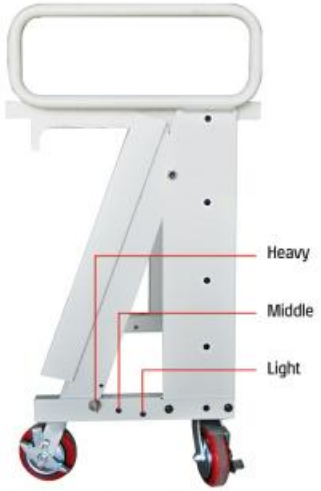

3 Stage load control function

Casters

MINI. STANDARD Caster (5 inch)

U-BOAT CART Caster (4 inch, 8 inch)

Use customized casters easier maneuverability and longer service life.

Advantage

The ergonomic design allows 3 different weight adjustable(Light, Middle, Heavy) and the platform maintains waist level at all time.

OKO products do not use additional power source(no electronic, hydraulic and battery power etc.) and do not emit CO2.

OKO products use patented SGPR technology system.

All steel construction with powder coating painted finish.

Specification

Model	Product Specification		Product weight
01. MINI	(W)520mm X (D)650mm X (H)820mm	Stroke: 520mm	48kg
	(W)20" X (D)25" X (H)32"	Storke: 20"	105LB
02. STANDARD	(W)520mm X (D)900mm X (H)820mm	Stroke: 520mm	52kg
	(W)20" X (D)35" X (H)32"	Storke: 20"	114LB
03. U-BOAT-47"	(W)420mm X (D)1200mm X (H)820mm	Stroke: 520mm	78kg
	(W)16" X (D)47" X (H)32"	Storke: 20"	171LB
04. U-BOAT-60"	(W)420mm X (D)1540mm X (H)820mm	Stroke: 520mm	80kg
	(W)16" X (D)60" X (H)32"	Storke: 20"	176LB
05. LIFT MINI	(W)520mm X (D)650mm X (H)820mm	Stroke: 520mm	–
	(W)20" X (D)25" X (H)32"	Storke: 20"	–
06. LIFT STANDARD	(W)520mm X (D)900mm X (H)820mm	Stroke: 520mm	–
	(W)20" X (D)35" X (H)32"	Storke: 20"	–

Patented SGPR system

- Spring Gas Pneumatic Resistance system -

No use additional power source (no electronic, hydraulic and battery power etc.)

Model	PRIME		
Product Specification	(W)500㎜ X (D)650㎜ X (H)770㎜ (W)19″ X (D)25″ X (H)30″	Stroke: 600㎜ Stroke : 23″	Mini
	(W)500㎜ X (D)900㎜ X (H)770㎜ (W)19″ X (D)35″ X (H)30″	Stroke: 600㎜ Stroke : 23″	Standard
Feature	Load adjustment function using plate (Light: 70kg, Middle: 150kg, Heavy: 300kg) (Light: 150LB, Middle: 330LB, Heavy: 660LB)		
Adventage	Convenient to customize the size of platform.		

Model	PRIME HYDRAULIC		
Product Specification	(W)500㎜ X (D)650㎜ X (H)770㎜ (W)19″ X (D)25″ X (H)30″	Stroke: 600㎜ Stroke : 23″	Mini
	(W)500㎜ X (D)900㎜ X (H)770㎜ (W)19″ X (D)35″ X (H)30″	Stroke: 600㎜ Stroke : 23″	Standard
Feature	Self-load control using hydraulic pump (Freely adjustable load within the range of 0~300kg(0~660LB))		
Adventage	Can be lower to safety transporting height.		

Model	PRIME BXT		
Product Specification	(W)500㎜ X (D)650㎜ X (H)770㎜ (W)19″ X (D)25″ X (H)30″	Stroke: 600㎜ Stroke : 23″	Mini
	(W)500㎜ X (D)900㎜ X (H)770㎜ (W)19″ X (D)35″ X (H)30″	Stroke: 600㎜ Stroke : 23″	Standard
Feature	Load adjustment function using plate (Light: 70kg, Middle: 150kg, Heavy: 300kg) (Light: 150LB, Middle: 330LB, Heavy: 660LB)		
Adventage	Prevent sensitive and expensive products from damage.		

PRIME

STROKE of 600㎜ (23 Inch)

It is designed to load more goods.

Easy Unload

It is made to make loading and unloading easy at any position.

WORLD BEST

Simple weight adjustment control

Depending on the weight of the product, the user can easily adjust to the desired weight .
(Light, Middle, Heavy)

Load change

Meterials can be easily loaded onto platform of cart, lowered to safe transport height and raised to unload at destination.
[Light: 70kg(150LB), Middle: 150kg(330LB), Heavy: 300kg(660LB)]

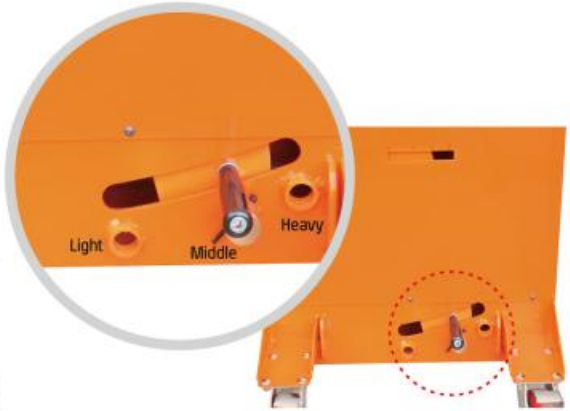

PRIME HYDRAULIC

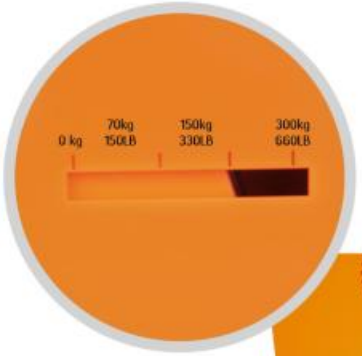

0~300kg(0~660LB) Adjustable load freely within range

Foot pedal control system

Function

- OKO Cart PRIME HYDRAULIC use a hydraulic pump to adjust to the load.
- Load can be adjust hydraulic pump 0~300kg(0~660LB)
- Platform can be fixed to the lowest level.

Specification

Model	Product Specification			Product weight
01. PRIME	(W)500mm × (D)650mm × (H)770mm (W)19″ × (D)25″ × (H)30″	Stroke: 600mm Stroke: 23″	Mini	76kg 167LB
	(W)500mm × (D)900mm × (H)770mm (W)19″ × (D)35″ × (H)30″	Stroke: 600mm Stroke: 23″	Standard	76kg 167LB
02. PRIME HYDRAULIC	(W)500mm × (D)650mm × (H)770mm (W)19″ × (D)25″ × (H)30″	Stroke: 600mm Stroke: 23″	Mini	–
	(W)500mm × (D)900mm × (H)770mm (W)19″ × (D)35″ × (H)30″	Stroke: 600mm Stroke: 23″	Standard	–
03. PRIME BXT	(W)500mm × (D)650mm × (H)770mm (W)19″ × (D)25″ × (H)30″	Stroke: 600mm Stroke: 23″	Mini	86kg 189LB
	(W)500mm × (D)900mm × (H)770mm (W)19″ × (D)35″ × (H)30″	Stroke: 600mm Stroke: 23″	Standard	86kg 189LB
04. Lift PRIME	(W)500mm × (D)650mm × (H)770mm (W)19″ × (D)25″ × (H)30″	Stroke: 600mm Stroke: 23″	Mini	–
	(W)500mm × (D)900mm × (H)770mm (W)19″ × (D)35″ × (H)30″	Stroke: 600mm Stroke: 23″	Standard	–

Model	STANDARD TURN		
Product Specification	(W) ø1350mm × (H)740mm (W) ø 53″ × (H)29″	Stroke: 450mm Stroke: 17″	360° Rotatable platform
Feature	Loads up to 300~1000kg(660LB~2200LB) Max load up to 3000kg(6600LB) (Release after setting load)		
Advantage	The scope of the work activity decrease and increase productivity up to 45%.		

Model	STANDARD		
Product Specification	(W)920mm × (D)920mm × (H)740mm (W)36″ × (D)36″ × (H)29″	Stroke: 450mm Stroke: 17″	Fixed platform
Feature	Loads up to 300~1000kg(660LB~2200LB) Max load up to 3000kg(6600LB) (Release after setting load)		
Advantage	Designed for stationary work.		

Model	PRIME TURN			
Product Specification	(W)1200mm × (D)1200mm × (H)770mm (W)47″ × (D)47″ × (H)30″	Stroke: 600mm Stroke: 23″	Basic	360° Rotatable platform
	(W)1500mm × (D)1500mm × (H)770mm (W)59″ × (D)59″ × (H)30″	Stroke: 600mm Stroke: 23″	Large	
Feature	3 Stage (Light, Middle, Heavy) load control using control panel Light: 300kg(660LB), Middle: 600kg(1320LB), Heavy: 900kg(1980LB)			
Advantage	Can be use longer pallets.			

Model	PRIME		
Product Specification	(W)1200mm × (D)980mm × (H)770mm (W)47″ × (D)38″ × (H)30″	Stroke: 600mm Stroke: 23″	Fixed platform
Feature	3 Stage (Light, Middle, Heavy) load control using control panel Light: 300kg(660LB), Middle: 600kg(1320LB), Heavy: 900kg(1980LB)		
Advantage	Fortable with pallet jack.		

STANDARD

Function

- Improved ergonomic design allow for easier, safer and faster loading and unloading.
- "X" frame design stabilize and balance heavy pallets.
- The use of the non-powered SGPR technology system is eco-friendly.
- No maintenance cost.

Advantages

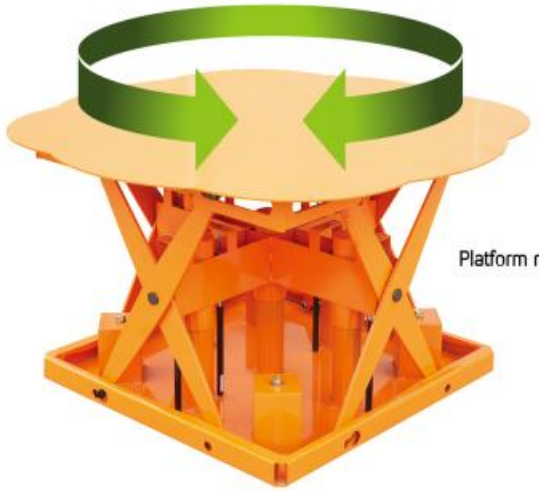

Platform rotate 360° degrees

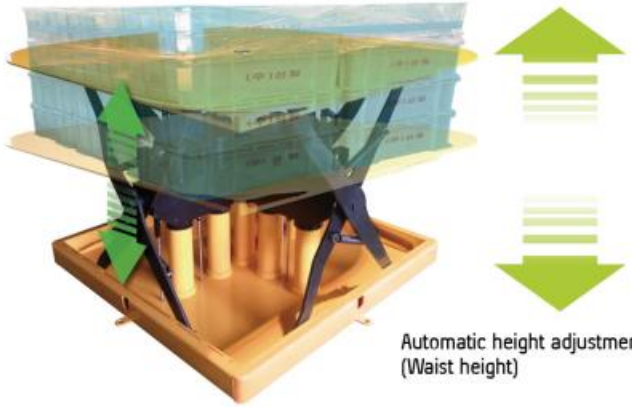

Automatic height adjustment
(Waist height)

OKO Pallet Lift

PRIME

Function

- OKO Pallet Lift helps to increase productivity and minimize work space with 360° degree rotatable platform.
- The patented SGPR(Spring Gas Pneumatic Resistance) technology system is available in 3 adjustable weight control(Light, Middle, Heavy).
- Easily portable forklift and pallet jack.

Advantages

3 Step Load Control (Light, Middle, Heavy)
Light: 300kg(660LB), Middle: 600kg(1320LB), Heavy: 900kg(1980LB)

Moveable with forklift and pallet jack

Lowest point 120㎜(5 Inch)

Prevent Back Injuries
Increase Productivity

Korea Sales Office

Website : www.okocart.com
E-mail : okocart@okocart.com
Phone : +82-62-962-5401
Mobile : +82-10-3067-0451
Fax : +82-62-962-5403
Address : 14-23, Sochon-ro 85beon-gil, Gwangsan-gu, Gwangju, Republic Of Korea