

EL^{ASTRON}

STEEL SERVICE CENTERS

- **Cladding Materials**
- **Composite Deck**
- **Cold Formed Sections**





ELT 35/1100

TRAPEZOIDAL STEEL SHEET


COIL WIDTH: 1250mm

THICKNESS: 0.4mm ~ 1.25mm

COVER WIDTH: 1100 ±5.0mm

DEPTH OF PROFILE: 34 ±1.0mm

PITCH: 275 ±2mm



ELT 39/896

TRAPEZOIDAL STEEL SHEET


COIL WIDTH: 1250mm

THICKNESS: 0.4mm ~ 1.25mm

COVER WIDTH: 896 ±5.0mm

DEPTH OF PROFILE: 39 ±1.0mm

PITCH: 128 ±1mm

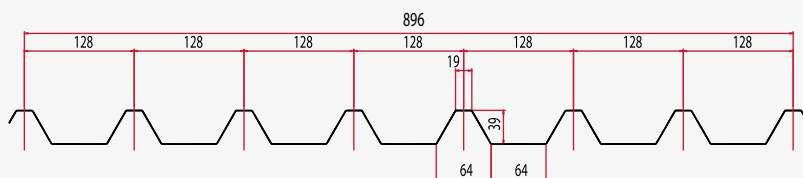

ELT 40/1000

TRAPEZOIDAL STEEL SHEET


COIL WIDTH: 1175mm

THICKNESS: 0.4mm ~ 1.0mm

COVER WIDTH: 1000 ±5.0mm

DEPTH OF PROFILE: 40 ±1.0mm

PITCH: 333.33 ±2mm

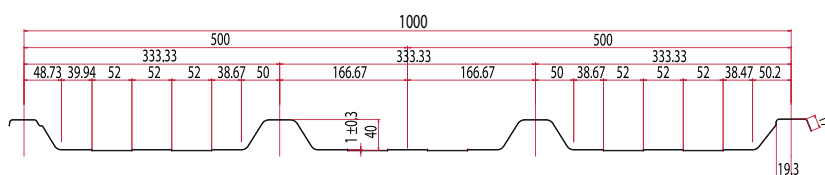

ELT 45/1000

TRAPEZOIDAL STEEL SHEET


COIL WIDTH: 1200mm

THICKNESS: 0.4mm ~ 1.0mm

COVER WIDTH: 1000 ±5.0mm

DEPTH OF PROFILE: 45 ±1.0mm

PITCH: 333.3 ±2mm

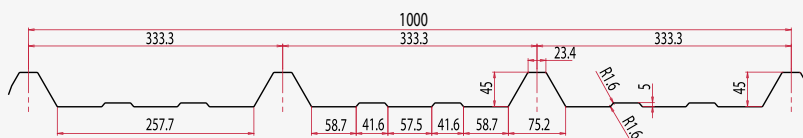

ELT 50/1000

TRAPEZOIDAL STEEL SHEET


COIL WIDTH: 1250mm

THICKNESS: 0.4mm ~ 1.25mm

COVER WIDTH: 1000 ±5.0mm

DEPTH OF PROFILE: 48.5 ±1.0mm

PITCH: 250 ±2mm

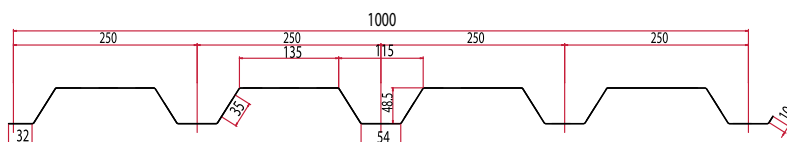

ELT 73/750

TRAPEZOIDAL STEEL SHEET


COIL WIDTH: 1250mm

THICKNESS: 0.7mm ~ 1.25mm

COVER WIDTH: 750 ±5.0mm

DEPTH OF PROFILE: 73 ±1.0mm

PITCH: 187.5 ±2mm

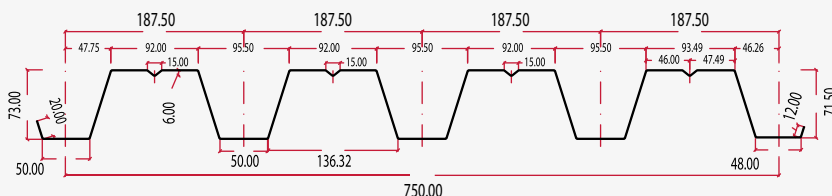

SYMDECK 50

COMPOSITE PROFILE STEEL SHEET

COIL WIDTH: 1250mm


THICKNESS: 0.75mm ~ 1.25mm


COVER WIDTH: 1000 ±5.0mm

DEPTH OF PROFILE: 48.5 ±1.0mm

PITCH: 250 ±2mm

QUALITY: S320GD

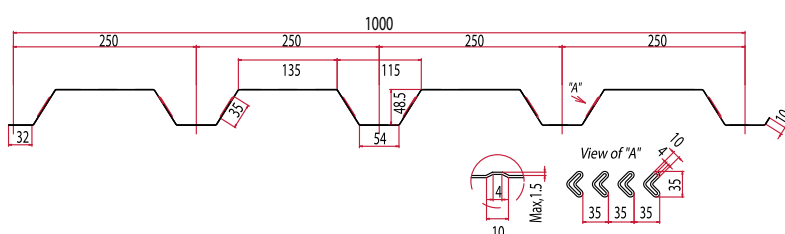


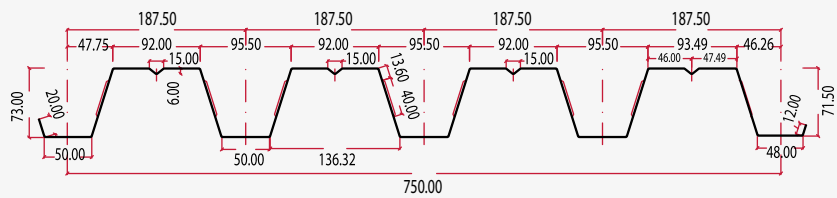

SYMDECK 73

COMPOSITE PROFILE STEEL SHEET


COIL WIDTH: 1250mm
THICKNESS: 0.75mm ~ 1.25mm
COVER WIDTH: 750 ±5.0mm
DEPTH OF PROFILE: 73 ±1.0mm
PITCH: 187.5 ±2mm
QUALITY: S320GD

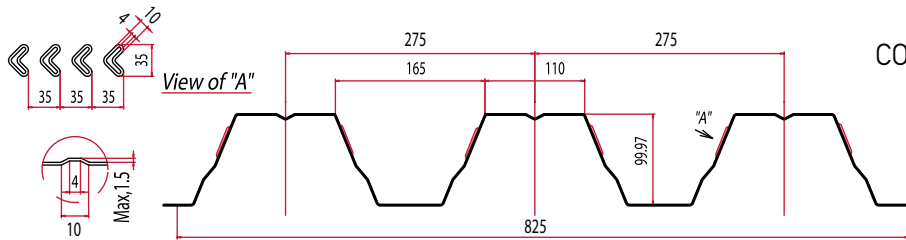

SYMDECK 100

COMPOSITE PROFILE STEEL SHEET


COIL WIDTH: 1250mm
THICKNESS: 0.75mm ~ 1.5mm
COVER WIDTH: 825 ±5.0mm
DEPTH OF PROFILE: 100 ±1.5mm
PITCH: 275 ±2mm
QUALITY: S320GD

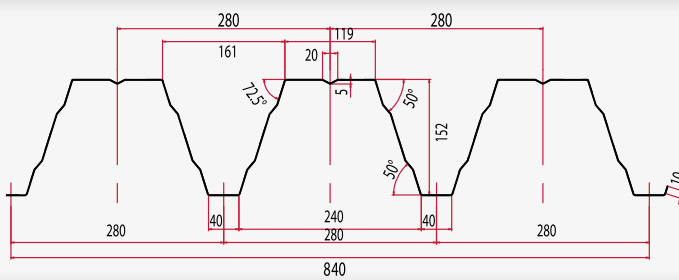

SYMDECK 150

COMPOSITE PROFILE STEEL SHEET


COIL WIDTH: 1500mm
THICKNESS: 0.75mm ~ 1.5mm
COVER WIDTH: 840 ±5.0mm
DEPTH OF PROFILE: 152 ±1.5mm
PITCH: 280 ±2mm
QUALITY: S320GD



ELS 19/836

CORRUGATED METAL SHEET


COIL WIDTH: 1000mm
THICKNESS: 0.3mm ~ 0.8mm
COVER WIDTH: 836mm
DEPTH OF PROFILE: 19 ±3.0mm



ELS 19/760

CORRUGATED METAL SHEET


COIL WIDTH: 910mm
THICKNESS: 0.3mm ~ 0.8mm
COVER WIDTH: 760mm
DEPTH OF PROFILE: 19 ±3.0mm

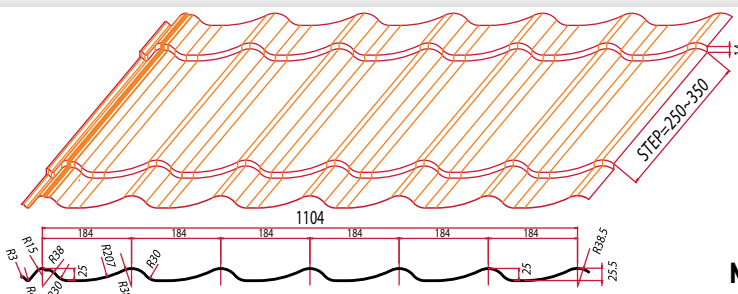

METALTILE ATTIKA

METALTILE

THICKNESS: 0.35mm ~ 0.8mm
COVER WIDTH: 1104 ±5.0mm
DEPTH OF PROFILE: 25 ±1.0mm
PITCH: 184 ±1.5mm
STEP: 250mm ~ 350mm
MINIMUM INSTALLATION ANGLE: 8°

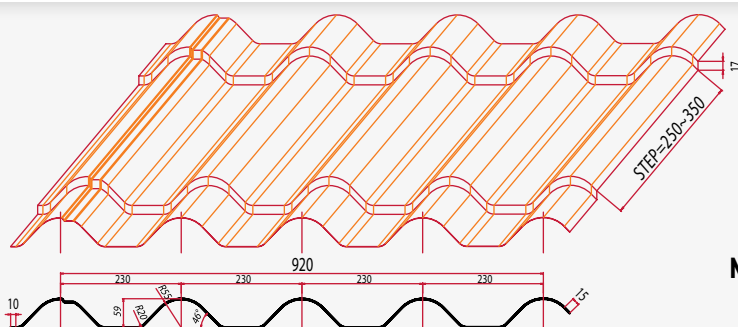

METALTILE ROMAN


METALTILE

THICKNESS: 0.35mm ~ 0.8mm
COVER WIDTH: 920 ±4.5mm
DEPTH OF PROFILE: 59 ±1.0mm
PITCH: 230 ±1.5mm
STEP: 250mm ~ 350mm
MINIMUM INSTALLATION ANGLE: 8°






MINIMUM INSTALLATION ANGLE: 8°

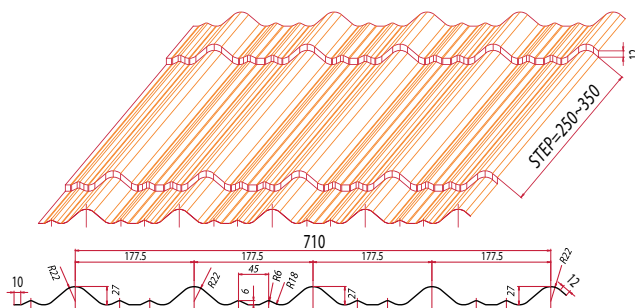


(PURLIN / RAIL)

HEIGHT: 140mm ~ 205mm



(PURLIN / RAIL)

HEIGHT: 140mm ~ 205mm




(PURLIN / RAIL)

HEIGHT: 175mm ~ 255mm



(PURLIN / RAIL)

HEIGHT: 205mm ~ 285mm



ELASTRON

STEEL SERVICE CENTERS

Ag. Ioannis str., Ag. Ioannis 19300 Aspropyrgos, Tel.: +30 210 5515000, Fax: +30 210 5515015
elatron@elatron.gr, www.elatron.gr