



# Industrial Ethernet Switches

---

*Product Selection Guide*

2021-2022



## Substations & Smart Grid

page 4

### System Requirements:

- Compliance with IEC61850-3, ensuring the best EMI shielding and communication without error
- Communication redundancy: ERPS and compatible Ring, STP/RSTP/MSTP/Master/Client
- Fiber optic uplinks for long-distance transmission, noise resistance, and huge bandwidth for upgrading
- Wide range of temperature support
- IEEE 1588 support
- Highest network availability in compliance with HSR/PRP.
- Security features based on IEEE 62443

### Atop solution:

- EH95xx
- EHG95xx
- RHG95xx
- RHG96xx



## RAILWAY & TRANSPORTATION

page 8

### System requirements:

- PoE at/af support
- IP67 or IP30 enclosure
- EN50155 & IEC60571 for Rolling stock certificated
- EN50121-4 for trackside certificated
- EN45545-2 for Fire protection
- NEMA TS-2 & E-Mark certificated for traffic control applications
- DNV GL certified for marine application
- Security features based on IEEE 62443

### Atop solution:

- |           |           |
|-----------|-----------|
| • EHG73xx | • RHG76xx |
| • EHG75xx | • EMG83xx |
| • EHG76xx | • EMG85xx |
| • RHG75xx | • EMG86xx |





## Industrial Automation & Process control

page 14

### System requirements:

- RSTP/ERPS... for network redundancy
- Wide range of operation temperature support
- Profinet CC-B certificated (EHG7504/08, EH75xx)
- Redundancy power supply
- Level-3 EMC protection
- IP30 metal housing with DIN-Rail /Wall mount (optional)
- Security features based on IEEE 62443 (Managed Switch)

### Atop solution:

- |           |           |
|-----------|-----------|
| • EH20xx  | • EHG75xx |
| • EH23xx  | • EHG76xx |
| • EH33xx  | • RHG75xx |
| • EH64xx  | • RHG76xx |
| • EHG65xx |           |



## OIL & GAS

page 20

### System Requirements:

- UL Class 1 Division 2 ATEX, and wide operating temperature capabilities
- Wide range of operation temperature support

### Atop solution:

- EHG73xx



# Substations & Smart Grid

## *Industrial Networking Solutions for the Power Industry*

Over the decades, various utility communication protocols have been developed to manage power grid networks and their components such as control centers, RTUs, and IEDs. Due to which different standards are adopted and used abundantly around the world. Distributed Network Protocol (DNP 3), principally in North America has emerged to achieve open, standards based interconnectivity between substation computers, remote terminal units, intelligent electronic devices and master stations for the electric utility industry. On the other hand, Europe has relied mainly on IEC 60870-5 101/103/104 to send/receive values with time stamps, and use other commands, while much of the world used Modbus protocol, designed for data exchange of one-bit binary registers or 16-bit registers.


Thousands of manufacturers across the globe are using their own device of communications across wide spectrum of protocols. With many protocols, substations can't communicate with each other with regards to power transmission and distribution. With IEC 61850, developed to provide a standard defining communication protocol for electrical substations and power grid automation it enables integration of all protection, control, measurement and monitoring functions. By specializing its domain knowledge in electrical power grid systems, IEC 61850 works as an object-oriented protocol that uses a data modeling scheme to clearly describe each component of a power grid or substation as standard logical nodes — such as object processes, protection, control, and functionality.

This specialization enables data access to the power grid system to yield more details. To further improve reliability and performance, IEC 61850 Part 3 also specifies the hardware and network suitability requirements — such as electromagnetic immunity (EMI), surge protection, vibration and shock resistance, and the temperature range in which devices must be able to function. **ATOP's switches comply with these specifications.**

## **IEC 61850-3 Device Compliancy Specifications require the device to:**

- a. Operate in a temperature range from -40°C to 75°C.
- b. Be capable of reliably handling long distance transmissions through Fiber optic connectivity.
- c. Guarantee QoS (Quality of Service) management and real-time packet switching for GOOSE event messages.
- d. Guarantees a level of redundancy that minimizes packet loss. Ring topologies should be supported, and zero-packet-loss technologies such as HSR (High availability Seamlessly Redundancy) or PRP (Parallel Redundancy Protocol) are strongly recommended to be supported. ATOP's devices support RSTP (Rapid Spanning-Tree Protocol) and ERPS rings. When equipped with HSR/PRP modules, our innovative RHG9528/RHG9628 switch can guarantee no loss of GOOSE packets.
- e. Have a wide tolerance for vibrations and shocks. ATOP's MIL-STD-810F device fully complies.
- f. Have tough electromagnetic immunity and comply with emission standards.
- g. Have at least Level 3 EMC protection; have at least Level 4 ESD, EFT and Surge protection; and have at least Level 5 PFMF and Damped Oscillatory Magnetic Field immunity.



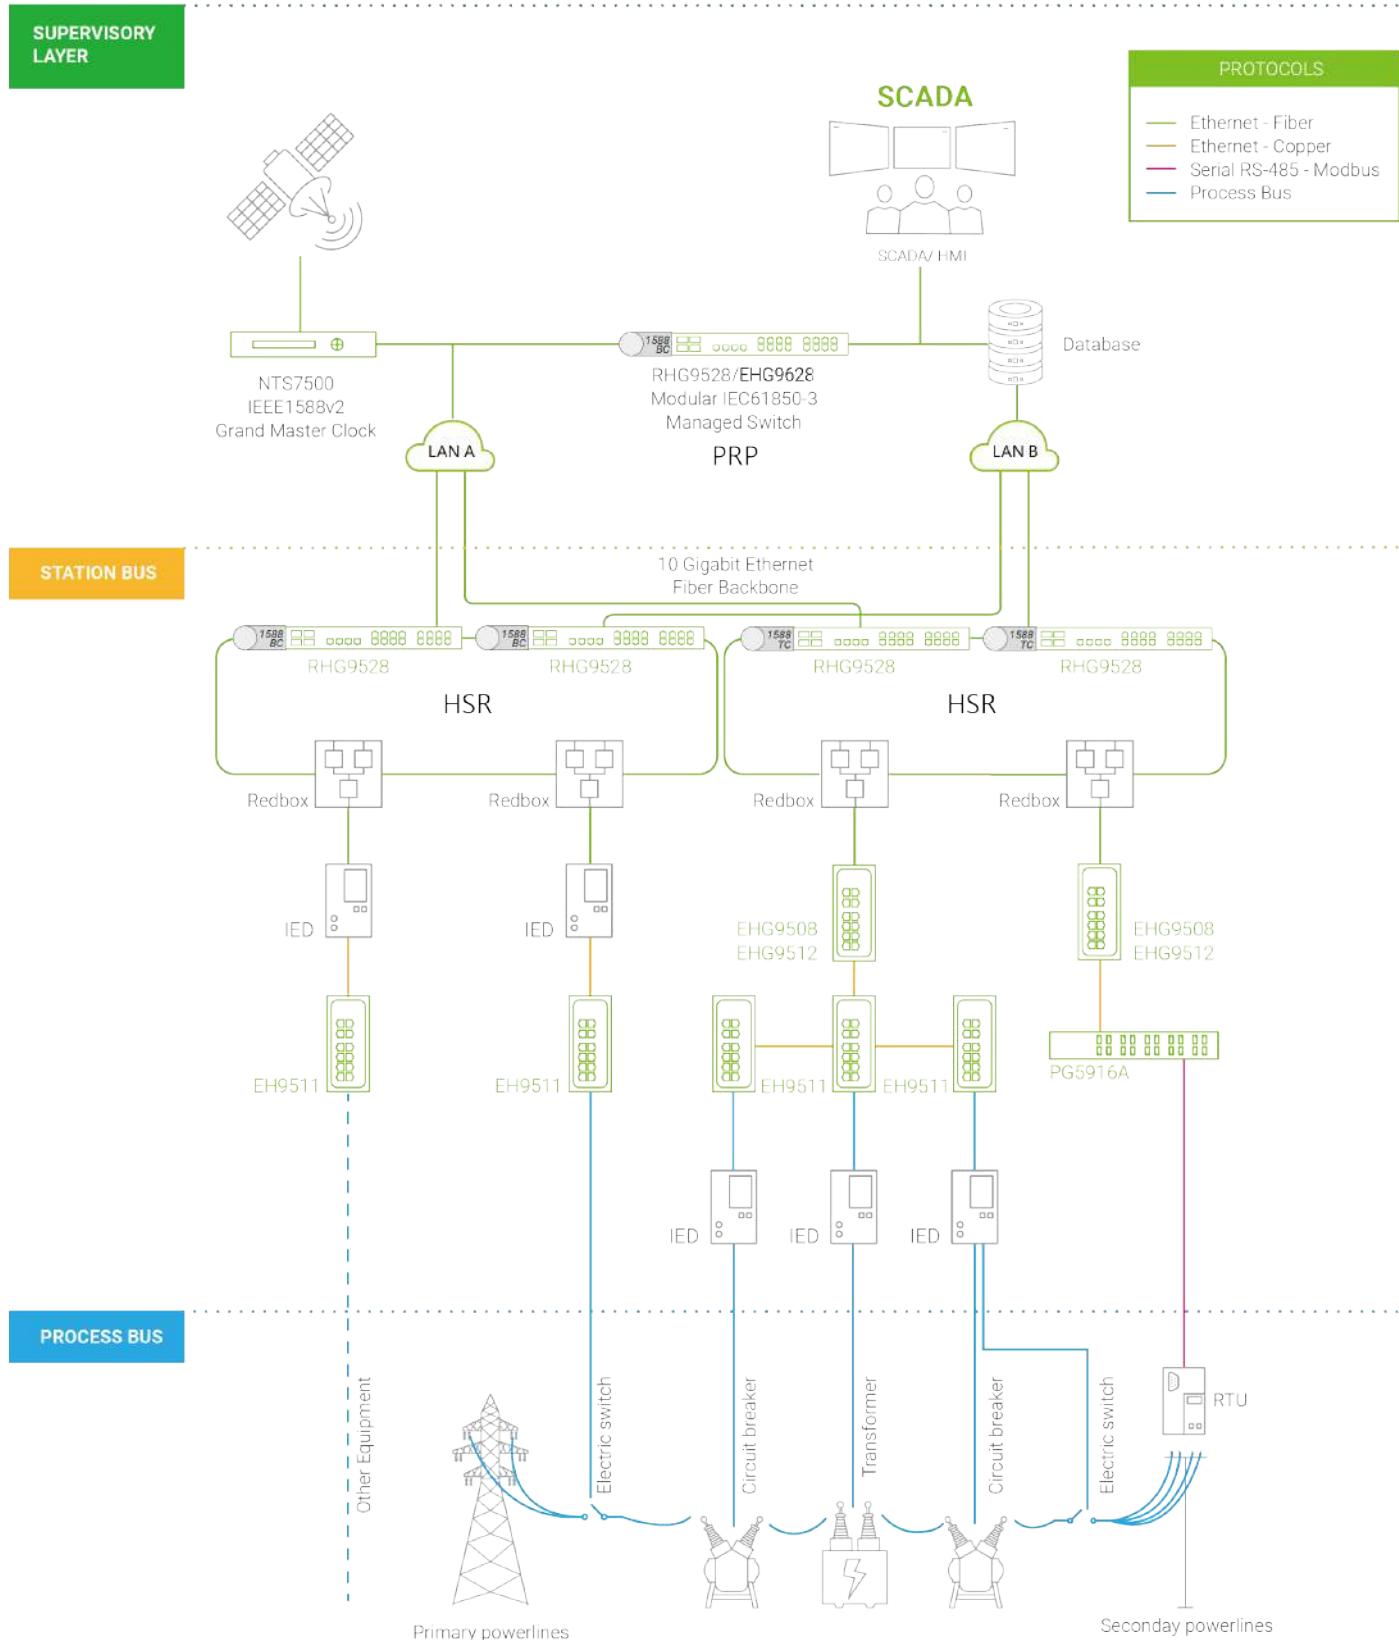

## IEC61850-3 Certified Managed Switches

					Rack-mount, Modular
<b>General Information</b>					
Model Number	EH9511-3SFP	EHG9508-2SFP	EHG9512-4SFP	RHG9528-CPU-X RHG9628-CPU-X	RHG9528-CPU-X-BS-Y RHG9628-CPU-X-BS-Y
<b>Modular Design</b>					
Gigabit Copper Module				•	•
Gigabit Fiber Module				•	•
<b>Number of ports</b>					
Total number of ports	11	8	12	Max 28	Max 28
10 Gigabit Ethernet SFP	-	-	-	4	4
Gigabit Ethernet	3	8	12	Max 28	Max 28
10/100 BaseT(X)	8				
10/100/1000BaseT(X)	-	6	8	Max 24	Max 24
100/1000 Base-X SFP	3	-	-	Max 24	Max 24
1000Base-X SFP	-	2	4	Max 28	Max 28
HSR/PRP RJ45 ports or SFPs	-	-	-	Max 4	Max 4
1PPS output BNC	-	-	-	-	1
<b>Power Supply input</b>					
Power input	24~48VDC	24~57 VDC	24~57 VDC	24~120 VDC	24~120 VDC
Power input (High-Voltage option)	100~220 VAC 100~370VDC	100~220 VAC or 135~330VDC	100~220 VAC or 135~330VDC	100~240 VAC or 120~380VDC	100~240 VAC or 120~380VDC
Power Redundancy	Dual input	Optional	Optional	•	•
Relay Output	•	•	•	•	•
<b>Mechanical</b>					
Housing	Metal	Metal	Metal	Metal	Metal
Installation	DIN-rail	DIN-rail	DIN-rail	Rack-mount	Rack-mount
Ingress Protection	IP30	IP30	IP30	IP30	IP30
Dimensions (L x W x H) mm	77 x 145 x 138	77 x 147 x 113	77 x 147 x 113	440 x 44 x 355	440 x 44 x 355
<b>Supported Temperatures</b>					
Operations Temperature	-40~75° C	-40~75° C	-40~75° C	-40~75° C	-40~75° C
Storage Temperature	-40~85° C	-40~85° C	-40~85° C	-40~85° C	-40~75° C
<b>Network Redundancy</b>					
STP/RSTP/MSTP	•	•	•	•	•
HSR/PRP				with Module	with Module
ITU-T G.8032 ERPS Ring	•	•	•	•	•
<b>Precision Timing</b>					
IEEE1588v2 Hardware-based E2E TC	•	•	•	•	•
IEEE1588v2 Hardware-based BC/full TC					•
Synchronous Ethernet (SyncE)					Optional
Hardware P2P TC	•			•	•
<b>Protocols</b>					
SNMPv1/v2c/v3	•	•	•	•	•
Modbus TCP	•	•	•	•	•
IEEE802.1ad LACP Port Trunking	•	•	•	•	•
IEEE802.1p QoS	•	•	•	•	•
IEEE802.1q VLAN	•	•	•	•	•
IEEE802.1x for Authentication	•	•	•	•	•
IGMPv1/v2/v3/ IGMP Snooping	•	•	•	•	•
DHCP Option 66/67/82	•	•	•	•	•
IPv4/IPv6	•	•	•	•	•
ACLs	•	•	•	•	•
GARP, GVRP, GMRP	•	•	•	•	•
L3 routing (static/RIP/OSPF/PIM/BGP)				RHG96xx only	RHG96xx only
<b>Compliance</b>					
UL/EN/IEC(CB) 60950-1 and/or 62368-1				•	•
EN60950-1 and/or EN62368-1	•			•	•
UL61010-2-201		•	•	•	•
IEC61850-3 / IEEE1613	•	•	•	•	•



+ 886 - 3 - 5508137



+ 886 - 3 - 5508131

info@atop.com.tw

www.atoponline.com

# Railway & Transportation

*Industrial Networking for Railway, Public transportation and Marine*

## Railway and Trackside Made Easy

*Industrial Networking for Railway transportation*

Defining certain criteria that network devices must comply with when installed on trains include environmental, shock, power supply, vibration, power supply, humidity, electromagnetic interference, wide temperature range, EMC, power surge, electrostatic discharge (ESD) and transient factors.

**EN 50155** is recognized internationally as a standard for covering electronic equipment in railway applications.


Complying with EN50155 and with the essential sections of **EN50121-4** for ground equipment, ATOP's railway-certified switches are powerful industrial ethernet switches with advanced features that are encased in robust and reliable housing, making them highly suitable for use in signal control networks and on-board applications.

## Temperature Requirements

Category	Internal cabinet temperature range	Ambient board temperature range	GAIA converter modules temperature range
T1	-25/55 °C	-25/70 °C	Industrial line: -40/71 °C ambient
T2	-40/55 °C	-40/70 °C	Industrial line: -40/71 °C ambient
T3	-25/70 °C	-25/85 °C	Hi-rel line: -40/85 °C ambient
T4	-40/70 °C	-40/85 °C	Hi-rel line: -40/85 °C ambient



## Possible topologies

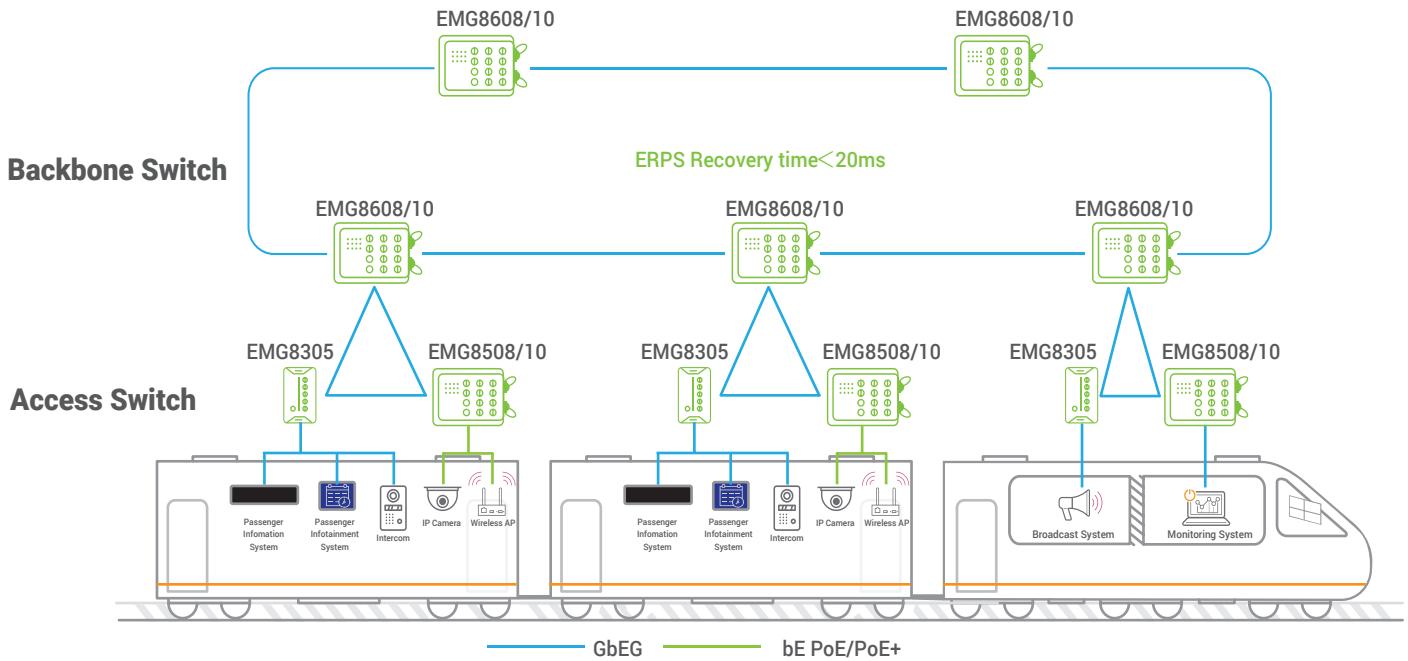

# Public transportation and Traffic Control

## *Industrial Networking for ITS*

ATOP Fast-Ethernet and Gigabit Managed Switches obtained NEMA TS2 certification! NEMA TS2 is a standard for traffic control assemblies, such as traffic lights, emergency road condition signs and walk/don't walk signs. It is a fundamental standard for all devices that are to be used in smart cities in traffic management applications and in ITS (Intelligent Transportation System).

In our continuing endeavor to bring to our customers Industrial Networking products that have a wider range of Hardware platforms that are rich in features we are proud to announce an additional certification obtained by our Gigabit and Fast-Ethernet managed Switches.

NEMA TS2 is a standard for traffic control assemblies, such as traffic lights, emergency road condition signs and walk/don't walk signs. It is a fundamental standard for all devices that are to be used in smart cities in traffic management applications and in ITS (Intelligent Transportation System). The standard defines minimum requirements for resistance to high/low temperature, high humidity, vibration, and mechanical shock.



# Marine

## *Networking solutions for the connected vessel*

Det Norsek Veritas(DNV) and Germanischer Lloyd(GL) set standards for ships and offshore structure which comprise safety, reliability, and environmental requirements for the switch internationally.

Atop certified by DNV.GL for EHG9508/12 and EHG75 series Industrial Managed Gigabit Switch Series.



## Transportation Switches

	Unmanaged Switches						Managed Layer-2 Gigabit Switches		
									
<b>General Information</b>									
Model Number	EH2308	EHG7305	EHG7306	EHG7307	EHG6408	EMG8305	EH7506	EH7508	EH7512
<b>Number of ports</b>									
Total number of ports	8	5	6	7	8	5	6	8	12
Fast Ethernet 10/100 BaseT(X)	8	-	-	-	-	-	4	4	8
Gigabit 10/100/1000 BaseT(X)	-	5	5	5	8	5 (M12)	-	(4) combo	(4) combo
Gigabit 1000Base-X SFP	-	-	-	-	-	-	-	-	-
Gigabit 100/1000Base-X SFP	-	-	1	2	-	-	2	(4) combo	(4) combo
1/10 Gigabit SFP	-	-	-	-	-	-	-	-	-
PoE/PoE+ ports	-	Max 4	Max 4	Max 4	Max 8	-	Max 4	Max 4	Max 8
<b>Power Supply input</b>									
Power input	9~48V	12~57V (PoE from 45V)	12~57V (PoE from 45V)	12~57V (PoE from 45V)	12~57V (PoE from 12V)	12~48V	9~57V (PoE from 45V)	9~57V (PoE from 45V)	9~57V (PoE from 45V)
Power input (High-Voltage option)	-	-	-	-	-	-	-	-	-
Power Redundancy	•	•	•	•	•	•	•	•	•
Relay Output	-	•	•	•	•	-	•	•	•
<b>Mechanical</b>									
Housing	Aluminum	Metal	Metal	Metal	Metal	Aluminum	Metal	Metal	Metal
Installation	DIN-rail	DIN-rail	DIN-rail	DIN-rail	DIN-rail	Field-mount	DIN-rail	DIN-rail	DIN-rail
Ingress Protection	IP30	IP30	IP30	IP30	IP30	IP67	IP30	IP30	IP30
Dimensions (L x W x H) mm	45 x 90 x 78	32 x 90 x 110	45 x 90 x 110	45 x 90 x 110	54 x 113 x 145	106 x 196 x 48	60 x 138 x 164	60 x 138 x 164	60 x 138 x 164
<b>Supported Temperatures</b>									
Operations Temperature	-10~70° C	-40~70° C	-40~70° C	-40~70° C	-40~70° C	-40~75° C	-20~70° C	-20~70° C	-20~70° C
Storage Temperature	-40~85° C	-40~85° C	-40~85° C	-40~85° C					
<b>Network Redundancy</b>									
STP/RSTP/MSTP	-	-	-	-	-	-	•	•	•
ITU-T G.8032 ERPS Ring	-	-	-	-	-	-	•	•	•
MRP (Master/Client)	-	-	-	-	-	-	•	•	•
<b>Protocols</b>									
SNMPv1/v2c/v3	-	-	-	-	-	-	•	•	•
Modbus TCP	-	-	-	-	-	-	•	•	•
Profinet CC-B	-	-	-	-	-	-	•	•	•
IEEE802.1ad LACP Port Trunking	-	-	-	-	-	-	•	•	•
IEEE802.1p QoS	-	-	-	-	-	-	•	•	•
IEEE802.1q VLAN	-	-	-	-	-	-	•	•	•
IEEE802.1x for Authentication	-	-	-	-	-	-	•	•	•
IGMPv1/v2/v3/ IGMP Snooping	-	-	-	-	-	-	•	•	•
IEEE1588v2 Hardware-based E2E TC	-	-	-	-	-	-	-	-	-
DHCP Option 66/67/82	-	-	-	-	-	-	•	•	•
IPv4/IPv6	-	-	-	-	-	-	•	•	•
ACLs	-	-	-	-	-	-	•	•	•
GARP, GVRP, GMRP	-	-	-	-	-	-	•	•	•
Layer-3 Switching (Static, RIP, OSPF)	-	-	-	-	-	-	-	-	-
<b>Compliance</b>									
UL/EN/IEC(CB) 60950-1 and/or 62368-1	•	-	-	-	-	•	-	•	•
EN60950-1 and/or EN62368-1	•	•	•	•	•	•	•	•	•
UL61010-2-201	-	•	•	•	•	-	-	-	-
Atex Zone 2 - UL C1D2	-	•	•	•	•	-	-	-	-
E-Mark	•	-	-	-	-	-	-	-	-
NEMA TS2	-	-	-	-	-	-	•	•	•
EN50155/ EN50121-4	-	•	•	•	•	-	-	-	-

## Transportation Switches

	Managed Layer-2 Gigabit Switches							
								
	<b>General Information</b>							
Model Number	EHG7504	EHG7508	EHG7512	EHG7516	EHG7520	RHG7528	EMG8508	EMG8510
<b>Number of ports</b>								
Total number of ports	4	8	12	16	20	Max 28	8	10
Fast Ethernet 10/100 BaseT(X)	-	-	-	-	-	-	-	-
Gigabit 10/100/1000 BaseT(X)	Max 4	Max 8	Max 8	Max 12	Max 16	Max 24	8 (M12)	8 (M12)
Gigabit 1000Base-X SFP	Max 4	Max 4	-	-	-	4 or 4x10G	-	2
Gigabit 100/1000Base-X SFP	-	-	Max 8	Max 12	Max 16	Max 24	-	-
1/10 Gigabit SFP	-	-	4	4	4	Max 24	-	-
PoE /PoE+ ports	Max 4	Max 8	Max 8	Max 8	Max 8	Max 24	Max 8	Max 8
<b>Power Supply input</b>								
Power input	9~57V (PoE from 45V)	48~57V	12~57V (PoE from 45V)	12~57V (PoE from 45V)				
Power input (High-Voltage option)						110~220VAC	50~145VDC	50~145VDC
Power Redundancy	●	●	●	●	●	Optional	●	●
Relay Output	●	●	●	●	●	●	●	●
<b>Mechanical</b>								
Housing	Metal	Metal	Metal	Metal	Metal	Metal	Aluminum	Aluminum
Installation	DIN-rail	DIN-rail	DIN-rail	DIN-rail	DIN-rail	Rack-mount	Field-mount	Field-mount
Ingress Protection	IP30	IP30	IP30	IP30	IP30	IP30	IP67	IP67
Dimensions (L x W x H) mm	54 x 113 x 145	54 x 113 x 145	76 x 200 x 160	95 x 200 x 160	95 x 200 x 160	440 x 44 x 340	216 x 232 x 72	216 x 232 x 72
<b>Supported Temperatures</b>								
Operations Temperature	-20~70° C	-20~70° C	-40~70° C	-40~70° C	-40~70° C	-40~70° C	-40~75° C	-40~75° C
Storage Temperature	-40~85° C	-40~85° C	-40~85° C	-40~85° C				
<b>Network Redundancy</b>								
STP/RSTP/MSTP	●	●	●	●	●	●	●	●
ITU-T G.8032 ERPS Ring	●	●	●	●	●	●	●	●
MRP (Master/Client)	●	●	●	●	●	●	●	●
<b>Protocols</b>								
SNMPv1/v2c/v3	●	●	●	●	●	●	●	●
Modbus TCP	●	●	●	●	●	●	●	●
Profinet CC-B	●	●	●					
IEEE802.1ad LACP Port Trunking	●	●	●	●	●	●	●	●
IEEE802.1p QoS	●	●	●	●	●	●	●	●
IEEE802.1q VLAN	●	●	●	●	●	●	●	●
IEEE802.1x for Authentication	●	●	●	●	●	●	●	●
IGMPv1/v2/v3/ IGMP Snooping	●	●	●	●	●	●	●	●
IEEE1588v2 Hardware-based E2E TC	●	●	●	●	●	●	●	●
DHCP Option 66/67/82	●	●	●	●	●	●	●	●
IPv4/IPv6	●	●	●	●	●	●	●	●
ACLs	●	●	●	●	●	●	●	●
GARP, GVRP, GMRP	●	●	●	●	●	●	●	●
L3 routing (static/RIP/OSPF/PIM/BGP)								
<b>Compliance</b>								
UL/EN/IEC(CB) 60950-1 and/or 62368-1	●	●	●	●	●	●		
EN60950-1 and/or EN62368-1	●	●	●	●	●	●	●	●
UL61010-2-201							●	●
NEMA TS2	●	●	●	●	●			
Marine (DNV.GL)								
EN50155/ EN50121-4	●	●	●			●	●	●

## Transportation Switches

	Managed Layer-3 Gigabit Switches							
								
General Information								
Model Number	EHG7604	EHG7608	EHG7612	EHG7616	EHG7620	RHG7628	EMG8608	EMG8610
Number of ports								
Total number of ports	4	8	12	16	20	Max 28	8	10
Fast Ethernet 10/100 BaseT(X)	-	-	-	-	-	-	-	-
Gigabit 10/100/1000 BaseT(X)	Max 4	Max 8	Max 8	Max 12	Max 16	Max 24	8 (M12)	8 (M12)
Gigabit 1000Base-X SFP	Max 4	Max 4	-	-	-	4 or 4x10G	-	2
Gigabit 100/1000Base-X SFP	-	-	Max 8	Max 12	Max 16	Max 24	-	-
1/10 Gigabit SFP	-	-	4	4	4	-	-	-
PoE/PoE+ ports	Max 4	Max 8	Max 8	Max 8	Max 8	Max 24	Max 8	Max 8
Power Supply input								
Power input	9~57V (PoE from 45V)	48~57V	12~57V (PoE from 45V)	12~57V (PoE from 45V)				
Power input (High-Voltage option)						110~220VAC	50~145VDC	50~145VDC
Power Redundancy	•	•	•	•	•	Optional	•	•
Relay Output	•	•	•	•	•	•	•	•
Mechanical								
Housing	Metal	Metal	Metal	Metal	Metal	Metal	Aluminum	Aluminum
Installation	DIN-rail	DIN-rail	DIN-rail	DIN-rail	DIN-rail	Rack-mount	Field-mount	Field-mount
Ingress Protection	IP30	IP30	IP30	IP30	IP30	IP30	IP67	IP67
Dimensions (L x W x H) mm	54 x 113 x 145	54 x 113 x 145	76 x 200 x 160	95 x 200 x 160	95 x 200 x 160	440 x 44 x 340	216 x 232 x 72	216 x 232 x 72
Supported Temperatures								
Operations Temperature	-20~70° C	-20~70° C	-40~70° C	-40~70° C	-40~70° C	-40~70° C	-40~75° C	-40~75° C
Storage Temperature	-40~85° C	-40~85° C	-40~85° C	-40~85° C				
Network Redundancy								
STP/RSTP/MSTP	•	•	•	•	•	•	•	•
ITU-T G.8032 ERPS Ring	•	•	•	•	•	•	•	•
MRP (Master/Client)	•	•	•	•	•	•	•	•
Protocols								
SNMPv1/v2c/v3	•	•	•	•	•	•	•	•
Modbus TCP	•	•	•	•	•	•	•	•
IEEE802.1ad LACP Port Trunking	•	•	•	•	•	•	•	•
IEEE802.1p QoS	•	•	•	•	•	•	•	•
IEEE802.1q VLAN	•	•	•	•	•	•	•	•
IEEE802.1x for Authentication	•	•	•	•	•	•	•	•
IGMPv1/v2/v3/ IGMP Snooping	•	•	•	•	•	•	•	•
IEEE1588v2 Hardware-based E2E TC	•	•	•	•	•	•	•	•
DHCP Option 66/67/82	•	•	•	•	•	•	•	•
IPv4/IPv6	•	•	•	•	•	•	•	•
ACLs	•	•	•	•	•	•	•	•
GARP, GVRP, GMRP	•	•	•	•	•	•	•	•
Layer-3 Switching (Static, RIP, OSPF)	•	•	•	•	•	•	•	•
L3 routing (static/RIP/OSPF/PIM/BGP)	•	•	•	•	•	•	•	•
Compliance								
UL/EN/IEC(CB) 60950-1 and/or 62368-1	•	•	•	•	•	•		
EN60950-1 and/or EN62368-1	•	•	•	•	•	•	•	•
UL61010-2-201							•	•
E-Mark								
NEMA TS2	•	•	•	•	•			
Marine (DNV,GL)								
EN50155/ EN50121-4	•	•				•	•	•



+ 886 - 3 - 5508137



+ 886 - 3 - 5508131



info@atop.com.tw



www.atoponline.com

# Industrial Automation & Process control

## Entry Level

ATOP's entry level din-rail mount Unmanaged Switches offer a reliable, robust and cost-effective solution for simple network topologies offering features such as PoE connectivity and performance in harsh environments. IP30-rated, all of them are certified for Industrial EMC (**EN61000-6-4** and **EN61000-6-2**). They are built with either industrial plastic, steel or aluminium housing to suit different application environments for industrial environments, such as in hazardous locations that comply with FCC, TUV, UL, and CE standards. They operate in temperatures ranging from -10°C to 70°C, with units with plastic housing supporting an operating range of 0°C to 60°C. For enhanced safety and backup, redundant power supplies are featured on every model. Our products feature 4 to 8 Fast Ethernet or Gigabit Ethernet ports. Selected versions have single-mode or multi-mode Fiber optic uplink, and selected versions feature Power over Ethernet (PoE) and Gigabit speeds.

## Harsh Environments

By offering both **Layer 2** and **layer 3** options, ATOP's most advanced, fault tolerant product lines offer hundreds of different possible configurations. Our Harsh environment switches are the best choice to support highly demanding networks – in highly demanding environments. They feature 4 to 28 Fast Ethernet, Gigabit or 10 Gigabit ports, an operating temperature range from -20°C to 70°C or wider, **PoE/PoE+** ports, Relay Output, Redundant power input, Profinet Packet Prioritization (for Unmanaged Switches), and Profinet CC-B v2.33 certification (EH75xx, EHG7504/EHG7508). Selected products offer MIL-STD shock and vibration certification, in high humidity and operating temperatures of between **-40°C to 75°C**.

Being **Profinet CC-B v2.33 certified**, this switch Series is Automation and IoT ready.



Engineered for reliable performance in harsh industrial environments, ATOP's Layer-2 Managed Switches enable advanced network management, with features to maximize network performance and minimize downtimes. Our Managed Switches support **ERPS, RSTP, STP and MSTP redundancy**

**protocols**, enable Precision time Synchronization with IEEE1588 Precision Time Protocol. It provides you the ability to manage networks efficiently by SNMP, Web, Telnet or Console. QoS, VLAN and many more functionalities allow bandwidth optimization, increased security and more.

Layer-3 Switches provide an ideal solution for scaling up industrial networks or large surveillance applications. They support IPv4 Static Routing, RIPv1 and RIPv2, OSPFv2, BGP and multicast protocols such as PIM-DM, PIM-SM and DVMRP. With higher port density and faster switching capabilities ATOP BGP Layer-3 switches route data packets without making extra network hops, thus making it faster than routers.

To confront the increasing number of cyber incidents, system integrators have to prove that their network devices meet the technical requirements defined in the relevant guidelines of the IEC 62443 standard. The solutions must include enhanced component-level security and a mechanism to manage the security level of devices.

Atop Security Solution can meet the technical requirements defined in the IEC 62443 standard which protects the overall security of networks. Atop is going to get the certification of IEC 61443-4-1 by end of the 2021.



## Industrial Unmanaged Switches

	Unmanaged Switches							
								
<b>General Information</b>								
Model Number	EH2005	EH2006	EH2008	EHG2008	EH2305	EH2306	EH2308	EH2304-PR
<b>Number of ports</b>								
Total number of ports	5	6	8	8	5	6	8	4
Fast Ethernet 10/100 BaseT(X)	4	6	8	-	4	6	8	4
Fast Ethernet Fiber ports (SFP LC or ST)	1	-	-	-	1	-	-	-
Gigabit 10/100/1000 BaseT(X)	-	-	-	8	-	-	-	-
Gigabit 100/1000Base-X SFP	-	-	-	-	-	-	-	-
Gigabit 1000Base-X SFP	-	-	-	-	-	-	-	-
MACsec 802.1AE secure ports	-	-	-	-	-	-	-	-
PoE/PoE+ ports	-	-	-	-	-	-	-	-
<b>Power Supply input</b>								
Power input	9~30 V	9~30 V	9~48 V	9~48 V	9~30 V	9~30 V	9~48 V	9~48 V
Power input (High-Voltage option)								
Power Redundancy	•	•	•	•	•	•	•	•
Relay output								
<b>Mechanical</b>								
Housing	Plastic	Plastic	Plastic	Plastic	Aluminum	Aluminum	Aluminum	Metal
Installation	DIN-Rail	DIN-Rail	DIN-Rail	DIN-Rail	DIN-Rail	DIN-Rail	DIN-Rail	DIN-Rail
Ingress Protection	IP30	IP30	IP30	IP30	IP30	IP30	IP30	IP30
Dimensions (L x W x H) mm	45 x 90 x 80	45 x 90 x 78	45 x 90 x 78	45 x 90 x 78	22.5 x 110 x 78			
<b>Supported Temperatures</b>								
Operations Temperature	0~60° C	0~60° C	0~60° C	0~60 C	-10~70° C	-10~70° C	-10~70° C	-10~70° C
Storage Temperature	-40~60° C	-40~60° C	-40~60° C	-40~60° C	-40~85° C	-40~85° C	-40~85° C	-40~85° C
<b>Network Redundancy</b>								
STP/RSTP/MSTP								
ITU-T G.8032 ERPS Ring								
MRP (Master/Client)								
<b>Protocols</b>								
SNMPv1/v2c/v3								
Modbus TCP								
IEEE802.1ad LACP Port Trunking								
IEEE802.1p QoS								
IEEE802.1q VLAN								
IEEE802.1x for Authentication								
IEEE1588v2 Hardware-based E2E TC								
IGMPv1/v2/v3 IGMP Snooping								
DHCP Option 66/67/82								
IPv4/IPv6								
ACLs								
GARP, GVRP, GMRP								
Layer-3 Switching (Static, RIP, OSPF)								
<b>Compliance</b>								
UL/EN/IEC(CB) 60950-1 and/or 62368-1	•	•	•	•	•	•	•	•
EN60950-1 and/or EN62368-1	•	•	•	•	•	•	•	•
UL61010-2-201								
Atex Zone 2 - UL C1D2								
E-Mark							•	
NEMA TS2								
Marine (DNV.GL)								
EN50155/ EN50121-4								

## Industrial Unmanaged and Lite-Managed Ethernet Switches

	Unmanaged Switches									
	EH2308-PR	EHG2308	EH2316-2G	EH3305	EHG3305	EHG6408	EHG6410	EHG7305	EHG7306	EHG7307
<b>General Information</b>	<b>NEW!</b> <b>NEW!</b>									
Model Number	EH2308-PR	EHG2308	EH2316-2G	EH3305	EHG3305	EHG6408	EHG6410	EHG7305	EHG7306	EHG7307
<b>Number of ports</b>										
Total number of ports	8	8	16	5	5	8	10	5	6	7
Fast Ethernet 10/100 BaseT(X)	8	-	14	-	-	-	-	-	-	-
Fast Ethernet Fiber ports (SFP, LC or ST)	-	-	-	5	-	-	-	-	-	-
Gigabit 10/100/1000 BaseT(X)	-	8	2	-	5	8	8	5	5	5
Gigabit 100/1000Base-X SFP	-	-	-	-	-	-	2	-	1	2
Gigabit 1000Base-X SFP	-	-	-	-	-	-	-	-	-	-
MACsec 802.1AE secure ports	-	-	-	-	-	-	-	-	-	-
PoE/PoE+ ports	-	-	-	-	-	Max 8 (boost)	Max 8 (boost)	Max 4	Max 4	Max 4
<b>Power Supply input</b>										
Power input	9~48 V	9~48 V	9~48 V	12~48V	12~48V	12~57V (PoE from 12V)				
Power input (High-Voltage option)										
Power Redundancy	•	•	•			•	•	•	•	•
Relay output						•	•	•	•	•
<b>Mechanical</b>										
Housing	Metal	Aluminum	Metal	Metal	Metal	Metal	Metal	Metal	Metal	Metal
Installation	DIN-Rail	DIN-Rail	DIN-Rail	DIN-Rail	DIN-Rail	DIN-Rail	DIN-Rail	DIN-Rail	DIN-Rail	DIN-Rail
Ingress Protection	IP30	IP30	IP30	IP30	IP30	IP30	IP30	IP30	IP30	IP30
Dimensions (L x W x H) mm	45 x 110 x 90	45 x 90 x 78	54 x 113 x 145	23 x 93 x 70	23 x 93 x 70	54 x 113 x 145	54 x 113 x 145	32 x 90 x 110	45 x 90 x 110	45 x 90 x 110
<b>Supported Temperatures</b>										
Operations Temperature	-10~70° C	-10~70° C	-10~60° C	-40~70° C	-40~70° C	-40~75° C	-40~75° C	-40~70° C	-40~70° C	-40~70° C
Storage Temperature	-40~85° C	-40~85° C	-40~85° C	-40~70° C	-40~70° C	-40~85° C	-40~85° C	-40~85° C	-40~85° C	-40~85° C
<b>Network Redundancy</b>										
STP/RSTP/MSTP										
ITU-T G.8032 ERPS Ring										
MRP (Master/Client)										
<b>Protocols</b>										
SNMPv1/v2c/v3										
Modbus TCP										
IEEE802.1ad LACP Port Trunking										
IEEE802.1p QoS										
IEEE802.1q VLAN										
IEEE802.1x for Authentication										
IEEE1588v2 Hardware-based E2E TC										
IGMPv1/v2/v3 IGMP Snooping										
DHCP Option 66/67/82										
IPv4/IPv6										
ACLs										
GARP, GVRP, GMRP										
Layer-3 Switching (Static, RIP, OSPF)										
<b>Compliance</b>										
UL/EN/IEC(CB) 60950-1 and/or 62368-1	•	•	•	•	•	•	•			
EN60950-1 and/or EN62368-1	•	•	•			•	•	•	•	•
UL61010-2-201								•	•	•
Atex Zone 2 - UL C1D2								•	•	•
E-Mark										
NEMA TS2										
Marine (DNV.GL)										
EN50155/ EN50121-4						•	•	•	•	•

## Industrial Unmanaged and Lite-Managed Ethernet Switches

	Unmanaged	Smart Switches			Managed Layer-2 Fast-Ethernet Switches			
	 							
<b>General Information</b>		<b>NEW!</b>			<b>NEW!</b>			
Model Number	EMG8305	EHG2408	EHG6508	EHG6510	EH7506	EH7508	EH7512	EH7520
<b>Number of ports</b>								
Total number of ports	5	8	8	10	6	8	12	20
Fast Ethernet 10/100 BaseT(X)	-	-	-	-	4	4	8	16
Fast Ethernet Fiber ports (SFP, LC or ST)	-	-	-	-	2 (SFP)	-	-	-
Gigabit 10/100/1000 BaseT(X)	5 (M12)	8	8	8	-	(4) combo	(4) combo	(4) combo
Gigabit 100/1000Base-X SFP	-	-	-	2	-	(4) combo	(4) combo	(4) combo
Gigabit 1000Base-X SFP	-	-	-	2	-	-	-	-
MACsec 802.1AE secure ports	-	2	-	-	-	-	-	-
PoE/PoE+ ports	-	-	Max 8 (boost)	Max 8 (boost)	Max 4	Max 4	Max 8	Max 8
<b>Power Supply input</b>								
Power input	9~48 V	9~48 V	12~57V (PoE from 12V)	12~57V (PoE from 12V)	9~57V (PoE from 45V)	9~57V (PoE from 45V)	9~57V (PoE from 45V)	9~57V (PoE from 45V)
Power input (High-Voltage option)								
Power Redundancy	•	•	•	•	•	•	•	•
Relay output			•	•	•	•	•	•
<b>Mechanical</b>								
Housing	Aluminum	Metal	Metal	Metal	Metal	Metal	Metal	Metal
Installation	Field-Mount	DIN-Rail	DIN-Rail	DIN-Rail	DIN-Rail	DIN-Rail	DIN-Rail	DIN-Rail
Ingress Protection	IP67	IP30	IP30	IP30	IP30	IP30	IP30	IP30
Dimensions (L x W x H) mm	106 x 196 x 48	110 x 89 x 45	54 x 113 x 145	54 x 113 x 145	60 x 138 x 164	60 x 138 x 164	60 x 138 x 164	78 x 138 x 164
<b>Supported Temperatures</b>								
Operations Temperature	0~60° C	0~60° C	0~60° C	0~60 C	-10~70° C	-10~70° C	-10~70° C	-10~70° C
Storage Temperature	-40~60° C	-40~60° C	-40~60° C	-40~60° C	-40~85° C	-40~85° C	-40~85° C	-40~85° C
<b>Network Redundancy</b>								
STP/RSTP/MSTP		RSTP only	RSTP only	RSTP only	•	•	•	•
ITU-T G.8032 ERPS Ring					•	•	•	•
MRP (Master/Client)					•	•	•	•
<b>Protocols</b>								
SNMPv1/v2c/v3		•	•	•	•	•	•	•
Modbus TCP		•	•	•	•	•	•	•
Profinet					CC-B	CC-B	CC-B	CC-B
IEEE802.1ad LACP Port Trunking		•	•	•	•	•	•	•
IEEE802.1p QoS		•	•	•	•	•	•	•
IEEE802.1q VLAN		•	•	•	•	•	•	•
IEEE802.1x for Authentication	•				•	•	•	•
IEEE1588v2 Hardware-based E2E TC					•	•	•	•
IGMPv1/v2/v3 IGMP Snooping					•	•	•	•
DHCP Option 66/67/82					•	•	•	•
IPv4/IPv6		IPv4	IPv4	IPv4	•	•	•	•
ACLs					•	•	•	•
GARP, GVRP, GMRP					•	•	•	•
Layer-3 Switching (Static, RIP, OSPF)								
<b>Compliance</b>								
UL/EN/IEC(CB) 60950-1 and/or 62368-1		•	•	•	•	•	•	•
EN60950-1 and/or EN62368-1	•	•	•	•	•	•	•	•
UL61010-2-201	•							
Atex Zone 2 - UL C1D2								
E-Mark								
NEMA TS2					•	•	•	
EN50155/ EN50121-4	•							

## Industrial Managed Ethernet Switches

	Managed Layer-2 Gigabit Switches							
	EHG7504	EHG7508	EHG7512	EHG7516	EHG7520	EMG8508	EMG8510	RHG7528
<b>General Information</b>								
Model Number	EHG7504	EHG7508	EHG7512	EHG7516	EHG7520	EMG8508	EMG8510	RHG7528
<b>Number of ports</b>								
Total number of ports	4	8	12	16	20	8	10	Max 28
Fast Ethernet 10/100 BaseT(X)	-	-	-	-	-	-	-	-
Fast Ethernet Fiber ports (SFP, LC or ST)	-	-	-	-	-	-	-	-
Gigabit 10/100/1000 BaseT(X)	Max 4	Max 8	Max 8	Max 12	Max 16	8 (M12)	8 (M12)	Max 28
Gigabit 100/1000Base-X SFP	-	-	Max 8	Max 12	Max 16	-	-	Max 24
Gigabit 1000Base-X SFP	Max 4	Max 8	-	-	-	-	2	-
MACsec 802.1AE secure ports	-	-	4	4	4	-	-	Max 4
PoE/PoE+ ports	Max 4	Max 8	Max 8	Max 24				
<b>Power Supply input</b>								
Power input	9~57V (PoE from 45V)	9~57V (PoE from 45V)	9~57V (PoE from 45V)	9~57V (PoE from 45V)	9~57V (PoE from 45V)	12~57V (PoE from 45V)	12~57V (PoE from 45V)	48~57V (PoE from 48V)
Power input (High-Voltage option)						45~145 VDC	45~145 VDC	110~220VAC
Power Redundancy	•	•	•	•	•	•	•	Optional
Relay output	•	•	•	•	•	•	•	•
<b>Mechanical</b>								
Housing	Metal	Metal	Metal	Metal	Metal	Aluminum	Aluminum	Metal
Installation	DIN-Rail	DIN-Rail	DIN-Rail	DIN-Rail	DIN-Rail	Field-Mount	Field-Mount	Rack-mount
Ingress Protection	IP30	IP30	IP30	IP30	IP30	IP67	IP67	IP30
Dimensions (L x W x H) mm	54 x 113 x 145	54 x 113 x 145	76 x 160 x 200	95 x 160 x 200	95 x 160 x 200	216 x 232 x 72	216 x 232 x 72	440 x 44 x 340
<b>Supported Temperatures</b>								
Operations Temperature	-20~70° C	-20~70° C	-40~70° C	-40~70° C	-40~70° C	-40~75° C	-40~75° C	-40~70° C
Storage Temperature	-40~85° C	-40~85° C	-40~85° C	-40~85° C	-40~85° C	-40~85° C	-40~85° C	-40~85° C
<b>Network Redundancy</b>								
STP/RSTP/MSTP	•	•	•	•	•	•	•	•
ITU-T G.8032 ERPS Ring	•	•	•	•	•	•	•	•
MRP (Master/Client)	•	•	•	•	•	•	•	•
<b>Protocols</b>								
SNMPv1/v2c/v3	•	•	•	•	•	•	•	•
Modbus TCP	•	•	•	•	•	•	•	•
Profinet	CC-B	CC-B						
IEEE802.1ad LACP Port Trunking	•	•	•	•	•	•	•	•
IEEE802.1p QoS	•	•	•	•	•	•	•	•
IEEE802.1q VLAN	•	•	•	•	•	•	•	•
IEEE802.1x for Authentication	•	•	•	•	•	•	•	•
IEEE1588v2 Hardware-based E2E TC	•	•	•	•	•	•	•	•
IGMPv1/v2/v3 IGMP Snooping	•	•	•	•	•	•	•	•
DHCP Option 66/67/82	•	•	•	•	•	•	•	•
IPv4/IPv6	•	•	•	•	•	•	•	•
ACLs	•	•	•	•	•	•	•	•
GARP, GVRP, GMRP	•	•	•	•	•	•	•	•
Layer-3 Switching (Static, RIP, OSPF)								
<b>Compliance</b>								
UL/EN/IEC(CB) 60950-1 and/or 62368-1	•	•	•	•	•			•
EN60950-1 and/or EN62368-1	•	•	•	•	•	•	•	•
UL61010-2-201						•	•	
E-Mark								
NEMA TS2	•	•	•	•	•			
Marine (DNV.GL)								
EN50155/ EN50121-4	•	•				•	•	•

## Industrial Managed Ethernet Switches

	Managed Layer-3 Gigabit Switches					
						
General Information						
Model Number	EHG7604	EHG7608	EHG7612	EHG7616	EHG7620	RHG7628
Number of ports						
Total number of ports	4	8	12	16	20	Max 28
Fast Ethernet 10/100 BaseT(X)	-	-	-	-	-	-
Fast Ethernet Fiber ports (SFP, LC or ST)	-	-	-	-	-	-
Gigabit 10/100/1000 BaseT(X)	Max 4	Max 8	Max 8	Max 12	Max 16	Max 28
Gigabit 100/1000Base-X SFP	-	-	Max 8	Max 12	Max 16	Max 24
Gigabit 1000Base-X SFP	Max 4	Max 8	-	-	-	-
MACsec 802.1AE secure ports	-	-	4	4	4	Max 4
PoE/PoE+ ports	Max 4	Max 8	Max 8	Max 8	Max 8	Max 24
Power Supply input						
Power input	9~57V (PoE from 45V)	9~57V (PoE from 45V)	9~57V (PoE from 45V)	9~57V (PoE from 45V)	9~57V (PoE from 45V)	48~57V (PoE from 48V)
Power input (High-Voltage option)						110~220VAC
Power Redundancy	•	•	•	•	•	Optional
Relay output	•	•	•	•	•	•
Mechanical						
Housing	Metal	Metal	Metal	Metal	Metal	Metal
Installation	DIN-Rail	DIN-Rail	DIN-Rail	DIN-Rail	DIN-Rail	Rack-mount
Ingress Protection	IP30	IP30	IP30	IP30	IP30	IP30
Dimensions (L x W x H) mm	54 x 113 x 145	54 x 113 x 145	76 x 160 x 200	95 x 160 x 200	95 x 160 x 200	440 x 44 x 340
Supported Temperatures						
Operations Temperature	-20~70° C	-20~70° C	-40~70° C	-40~70° C	-40~70° C	-40~70° C
Storage Temperature	-40~85° C	-40~85° C	-40~85° C	-40~85° C	-40~85° C	-40~85° C
Network Redundancy						
STP/RSTP/MSTP	•	•	•	•	•	•
ITU-T G.8032 ERPS Ring	•	•	•	•	•	•
MRP (Master/Client)	•	•	•	•	•	•
Protocols						
SNMPv1/v2c/v3	•	•	•	•	•	•
Modbus TCP	•	•	•	•	•	•
IEEE802.1ad LACP Port Trunking	•	•	•	•	•	•
IEEE802.1p QoS	•	•	•	•	•	•
IEEE802.1q VLAN	•	•	•	•	•	•
IEEE802.1x for Authentication	•	•	•	•	•	•
IEEE158v2 Hardware-based E2E TC	•	•	•	•	•	•
IGMPv1/v2/v3 IGMP Snooping	•	•	•	•	•	•
DHCP Option 66/67/82	•	•	•	•	•	•
IPv4/IPv6	•	•	•	•	•	•
ACLs	•	•	•	•	•	•
GARP, GVRP, GMRP	•	•	•	•	•	•
Layer-3 Switching (Static, RIP, OSPF)	•	•	•	•	•	•
Compliance						
UL/EN/IEC(CB) 60950-1 and/or 62368-1	•	•	•	•	•	•
EN60950-1 and/or EN62368-1	•	•	•	•	•	•
UL61010-2-201						
E-Mark						
NEMA TS2	•	•	•	•	•	
Marine (DNV,GL)						
EN50155/ EN50121-4	•	•				•



+ 886 - 3 - 5508137



+ 886 - 3 - 5508131

info@atop.com.tw

www.atoponline.com

# Oil & Gas

## In hazardous environments, guaranteeing safety

The important assets of oil and gas need the highest level of performance, reliability, and safety from components operating in demanding conditions. Utilizing non-sparking components in dangerous environments is the best policy to guarantee safety. In order to achieve the standard of UL Class I Division II and ATEX, Atop designs the hazardous series with Industrial solution in gas, oil, and mine related environments. These places are full with flammable gases, liquids, vapors, and combustible dusts. In addition, we classified apparatus that has no normally arcing parts or these areas in hazardous environments because disasters may be caused with only one small spark. To guarantee the safety thermal effects capable of ignition and the safety of property and people. Atop releases EHG73xx series switches to fulfill this kind of applications. These series can be deployed in components which are hermetically sealed hazardous or explosive condition without increasing the risk of explosion or accelerating the damage if an accident occurs.



Atex certification



## Industrial Unmanaged Switches

	Unmanaged Switches		
			
General Information			
Model Number	EHG7305	EHG7306	EHG7307
Number of ports			
Total number of ports	5	6	7
Fast Ethernet 10/100 BaseT(X)	-	-	-
Fast Ethernet Fiber ports (SFP, LC or ST)	-	-	-
Gigabit 10/100/1000 BaseT(X)	5	5	5
Gigabit 100/1000Base-X SFP	-	1	2
Gigabit 1000Base-X SFP	-	-	-
MACsec 802.1AE secure ports	-	-	-
PoE/PoE+ ports	Max 4	Max 4	Max 4
Power Supply input			
Power input	12~57V (PoE from 12V)	12~57V (PoE from 12V)	12~57V (PoE from 12V)
Power input (High-Voltage option)			
Power Redundancy	•	•	•
Relay output	•	•	•
Mechanical			
Housing	Metal	Metal	Metal
Installation	DIN-Rail	DIN-Rail	DIN-Rail
Ingress Protection	IP30	IP30	IP30
Dimensions (L x W x H) mm	32 x 90 x 110	45 x 90 x 110	45 x 90 x 110
Supported Temperatures			
Operations Temperature	-40~70° C	-40~70° C	-40~70° C
Storage Temperature	-40~85° C	-40~85° C	-40~85° C
Network Redundancy			
STP/RSTP/MSTP			
ITU-T G.8032 ERPS Ring			
MRP (Client)			
Protocols			
SNMPv1/v2c/v3			
Modbus TCP			
IEEE802.1ad LACP Port Trunking			
IEEE802.1p QoS			
IEEE802.1q VLAN			
IEEE802.1x for Authentication			
IEEE1588v2 Hardware-based E2E TC			
IGMPv1/v2/v3 IGMP Snooping			
DHCP Option 66/67/82			
IPv4/IPv6			
ACLs			
GARP, GVRP, GMRP			
Layer-3 Switching (Static, RIP, OSPF)			
Compliance			
UL/EN/IEC(CB) 60950-1 and/or 62368-1			
EN60950-1 and/or EN62368-1	•	•	•
UL61010-2-201	•	•	•
Atex Zone 2 - UL C1D2	•	•	•
E-Mark			
NEMA TS2			
Marine (DNV,GL)			
EN50155/ EN50121-4	•	•	•



+ 886 - 3 - 5508137



+ 886 - 3 - 5508131



info@atop.com.tw



www.atoponline.com





+ 886 - 3 - 5508137



+ 886 - 3 - 5508131

 info@atop.com.tw

 www.atoponline.com



**Atop Technologies, Inc.**

**TAIWAN HEADQUARTERS**

2F, No. 146, Sec. 1, Dongxing Rd.,  
Zhubei City, Hsinchu County, Taiwan  
Tel: +886-3-550-8137  
Fax: +886-3-550-8131  
E-mail: info@atop.com.tw



[www.atoponline.com](http://www.atoponline.com)