

OILLESS BEARING



Headquarters and factory

(21695) 28-10, Namdongseo-ro 113 beon-gil, Namdong-gu, Incheon, Korea

TEL : +82-32-813-3401 / FAX : +82-32-813-4259 / Homepage : www.sgoilless.co.kr / E-mail : info@sgoilless.co.kr

Seoul branch

(08217) 15, Gyeongin-ro 53-gil, Guro-gu, Seoul, Korea

TEL : +82-2-2614-8837 / FAX : +82-2-2614-8878

Gyeonggi branch

(15103) 244, Gongdan 1-daero, Siheung-si, Gyeonggi-do, Korea

TEL : +82-31-430-3494 / FAX : +82-31-430-3495

Changwon branch

(51568) 21, 39-gil, Wollim-ro, Seongsan-gu, Changwon-si, Gyeongsangnam-do (Sinchon-dong), Korea

TEL : +82-55-262-3401 / FAX : +82-55-262-3403

SGO. CO., LTD.

Technical Value Creator

SGO

Fulfilling SGO's Commitment for Customer Satisfaction through Clean Environment and Management

Since its foundation in 2000, SGO has been specializing in broad ranges of its proprietary manufacturing and service technologies for maximizing the performances and efficiencies of oilless bearings used in industrial machines and molds.

SGO's endless research and development efforts to meet customer's needs resulted in Develon, a far more improved multi-layer bearing than conventional products.

SGO's commitment for development of next-generation products and services does not stop with a number of patents granted in Korea, Germany and Italy.

SGO will continue to be a close partner to meet customer's needs and provide the best services.



Casting Foundry



Continuous Casting



2,750-ton Extruding Machine



Solid Lubricant Molding Machine



(Develon) Sintering



Machining



Inspection



Friction Test (Bushing & Plate)



MES

Index

03 What is an Oilless bearing?	18 Sliding plate SP
04 What is solid lubricant dispersed bearing, Develon?	19 Wear plate VDI3357 / SWPV / SBPV
05 Operating conditions	20 Sliding liner SL
06 Non-ferrous metal standards	21 Cam bottom plate SCBS / SCBSL Cam bottom steel plate SCBS / SCBSPL
07 Straight bushing SOB / SBSB	22 SGO U/C bearing
09 Flange bushing SFB	23 Dry bearing SDU
10 Thrust washer SOW	25 Dry bearing SDUF
11 Guide bushing SGB / SGFB	26 Dry bearing SWC
12 Guide bushing SGO9834 / SGO61	27 Extrusion material
13 Guide bushing SGO71 Develon Guide flange bushing SBSF	29 Technical Data
14 Spherical bearing SOSB	33 Tolerances of Regularly Used Hole Fits
15 Wear plate SWP / SBP	35 Tolerances of Regularly Used Shaft Fits
17 Thin wear plate STWP / SBPT	37 Application

What is Oilless bearing?

A bearing that can improve productivity and save cost/time by having the material properties which can withstand both high & low temperature, corrosive environment, foreign particles, and impact load. There are various kind of shapes and materials for oilless bearings such as metal, non-metal, plastic and ceramic.

Applications

- Place where lubrication cannot be applied or lubrication is dangerous.
- Place where product can be contaminated or failure is occurred due to lubrication.
- Low / High temperature, under-water, and place that is exposed to chemicals.
- Place that can prevent decrease in productivity due to machine stop while lubricating.
- Place where oiling is not effective due to harsh conditions such as frequent stop motion.
- Impact and vibration, high-load low-speed motion, rust occurrence, foreign substance penetration.
- Sliding motion, angular pitching motion.

Advantage & Disadvantage of each lubricating method

Lubrication Type

● Dry Lubrication = Using solid lubricant

Example) SGO SDU Dry Bearing ➡ Teflon + Special additive
SGO #500 Bearing ➡ Natural graphite + Teflon lubricant
SGO DEVELON Bearing ➡ Natural graphite + Metal powder

What is solid lubricant?

Powder or solid type lubricant that is used in harsh conditions such as high temperature and corrosion environment and where oil or grease cannot be used. Generally it is mainly made with natural graphite, molybdenum disulfide, and P.T.F.E.

● Liquid lubrication (Using oil or water)

Example) SGO #300 ➡ Oil impregnation in porous cast iron

Advantage & Disadvantage of each lubricating method

Classification	Dry lubrication	Liquid lubrication
Advantage	• Can be used in high / low temperature. • Can be used in corrosive atmosphere. • Can be applied for high-load low-speed motion, reciprocating motion, impact load, angular pitching motion, and discontinuous frequent stop motion where oil lubrication is not effective. • Can be used without lubrication	• Ideal for high speed in light and medium load. ※ Liquid lubrication prevent friction between metal to metal by forming oil film with continuously rotating by centrifugal force in the clearance of shaft and housing.
Disadvantage	• Can be used in low speed in principle without lubrication. ※ Using it in high speed condition may occur seizure or shorten life cycle of bearing, because solid lubricant has higher friction coefficient than liquid lubricant.	• Oiling is required in regular basis. • Cannot be used in low / high temperature. • Cannot be used in corrosive atmosphere. • Not suitable for high-load & low-speed motion, reciprocating motion, impact load, angular pitching motion, and discontinuous frequent stop motion where oil film is difficult to be formed. • Not suitable for use in high load and high speed, which reduces lifetime due to excessive PV value.

Base metal and its use

CODE	SP	HP	BP	AI	B	F	SUS	S
Base metal	High Strength Brass Casing	Special High Strength Brass Casing	Brass Casting	Aluminum Bronze Casting	Bronze Casting	Cast iron	Stainless Steel	Steel
USE	General	Higher load and pressure than SP	General	General	General	High Temperature	Chemical Resistance	High Pressure
	High Pressure		Low load	Seawater	High speed		High temperature	Shock Resistance
	Under water			Underwater				

Solid Lubricant type


CODE	USE	CODE	USE
SL1	High Temperature	SL5	High Pressure, Sea water
SL2	General	SL7	Underwater, Eco-friendly
SL4	Underwater		

What is solid lubricant dispersed bearing, Develon?


Solid lubricant dispersed bearing, Develon is made with steel in external layer and with special solid lubricant in internal layer. This bi-layer metal bearing can be used for medium and high load with excellent abrasion resistance.

Bearing structure

- Sintered bearing layer (1~1.2mm)
➡ It is composed of solid lubricant such as Cu, Fe, Ni, Sn, MoS², graphite and pores filled with oil.
- Backing steel ➡ KS SS400/ SM45C

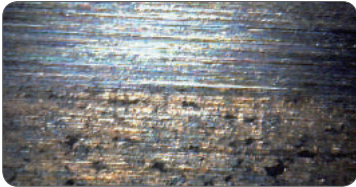

Bi-layer structure

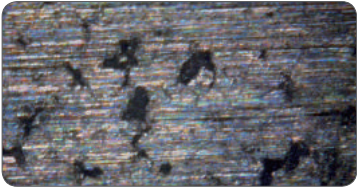

Distribution shape of solid lubricants



Characteristics

- Since solid lubricant is evenly distributed, it can be used for any motion direction.
- Since sintering and solid lubricant are applied, lubrication is multiplied, which can be used in high speed.
- Since it has lower heat expansion rate compared to general non-metal bearing, temperature change is low and it maintains high accuracy.
- Since heat processing is applied on external material, it is suitable for high load and it can be used without lubrication.
- Additional oil impregnation is needed to prevent oil washing after it has been stored for a long time or additional processing has been applied.
- Standards parts and custom-made parts available.

Characteristics

Code	Type	Lubrication	P Contact pressure	V velocity	PV value	T temperature	Specific gravity	Hardness	Elongation	Tensile strength
			kgf / cm ² N / mm ²	m / min m / s	kgf / cm ² · m / min N / mm ² · m / s	℃	g / cm ³	HRB	%	kgf / mm ² N / mm ²
200S	Fe-sintering	Dry	290 (760) 29 (76)	30 0.5	1,000 (3,000) 1.65 (4.90)	-40 ~ +120	6.3 ~ 7.1	0 ~ 20	17	41 400
		Periodic lubrication	500 (760) 50 (76)	60 1	1,500 (3,000) 2.45 (4.90)					
200SP	Cu-sintering	Dry	250 (700) 25 (70)	30 0.5	980 (2,800) 1.60 (4.58)	-40 ~ +120	6.0 ~ 6.8	-15 ~ 15	17	41 400
		Periodic lubrication	450 (700) 45 (70)	60 1	1,500 (3,000) 2.45(4.90)					
200H	Fe-sintering	Dry	450 (750) 45 (75)	30 0.5	1,000 (3,000) 1.63 (4.90)	-40 ~ +250	6.3 ~ 7.1	35 ~ 45	28	48 470
		Periodic lubrication	700 (1,200) 70 (120)	70 1.16	1,500 (3,000) 2.45 (4.90)					

※ () : Allowable static contact pressure (no sliding or sliding at extremely slow speed (0.1m / min or below))
※ Above data is based on backing steel KS SS400 / SM45C and its mechanical characteristics may be changed when backing steel is changed.
※ Value indicated above is general value and it can be changed without notification for improvement.

Operating Conditions

Code	Type	Allowable range				Mechnical properties				
		Lubrication	P Contact pressure	V velocity	PV value	T temperature	Specific gravity	Hardness	Elongation	Tensile strength
			kgf / cm ² N / mm ²	m / min m / s	kgf / cm ² · m / min N / mm ² · m / s	℃	g / cm ³	HB	%	kgf / mm ² N / mm ²
500SP	—	Dry	300 (1,500) 29 (150)	30 0.5	1,000 1.65	-40 ~ +150	7.8	210	12	77 755
		Periodic lubrication		60 1	2,000 3.25					
500HP	—	Dry	740 (1,800) 73 (180)	6 0.1	1,000 1.65	-40 ~ +150	7.8	245	12	77 755
		Periodic lubrication		15 0.25	2,000 3.25					
500SP9	—	Dry	920 (2,050) 90 (200)	15 0.25	1,000 1.65	-40 ~ +150	7.6	280	1	79 780
		Periodic lubrication		30 0.5	2,000 3.25					
500B	—	Dry	150 (500) 15 (49)	24 0.4	600 1.00	-40 ~ +150	8.7	-	15	20 195
		Periodic lubrication		51 0.85	1,000 1.65					
Develon 200S	Fe-sintering	Dry	290 (760) 29 (76)	30 0.5	1,000 (3,000) 1.65 (4.90)	-40 ~ +120	6.3 ~ 7.1	HRB 0 ~ 20	17	41 400
		Periodic lubrication	500 (760) 50 (76)	60 1	1,500 (3,000) 2.45 (4.90)					
Develon 200SP	Cu-sintering	Dry	250 (700) 25 (70)	30 0.5	980 (2,800) 1.60 (4.58)	-40 ~ +120	6.0 ~ 6.8	HRB -15 ~ 15	17	41 400
		Periodic lubrication	450 (700) 45 (70)	60 1	1,500 (3,000) 2.45 (4.90)					
Develon 200H	Cu-sintering for High load	Dry	450 (750) 45 (75)	30 0.5	1,000 (3,000) 1.63 (4.90)	-40 ~ +250	6.3 ~ 7.1	HRB 35~45	28	48 470
		Periodic lubrication	700 (1,200) 70 (120)	70 1.16	1,500 (3,000) 2.45 (4.90)					


※ () : Allowable static contact pressure (no sliding or sliding at extremely slow speed (0.1m/min or below))
※ Above data is based on backing steel KS SS400 / SM45C and its mechanical characteristics may be changed when backing steel is changed.
※ Value indicated above is general value and it can be changed without notification for improvement.

Non-ferrous metal Materials

Type	Code	Old code	Tensile strength	Elongation	Hardness	Foreign Standards	
			N / mm ²	%	HB	ASTM	DIN
Brass	CAC202	YBsc2	195 or above	20 or above	-	C85400	CuZn33Pb
	CAC203	YBsc3	245 or above	20 or above	-	C85700	CuZn37Pb
High Strength brass	CAC301	HBsc1	430 or above	20 or above	-	C86500	CuZn35Al1
	CAC302	HBsc2	490 or above	20 or above	-	C86400	CuZn34Al1
	CAC303	HBsc3	635 or above	18 or above	165 or above (10 / 3,000)	C86200	CuZn25Al5
	CAC304	HBsc4	755 or above	15 or above	200 or above (10 / 3,000)	C86300	CuZn25Al5
Bronze	CAC401	BC1	165 or above	15 or above	-	C84400	-
	CAC402	BC2	245 or above	20 or above	-	C90300	-
	CAC403	BC3	245 or above	15 or above	-	C90500	CuSn10Zn
	CAC406	BC6	195 or above	15 or above	-	C83600	CuSn5ZnPb
	CAC407	BC7	215 or above	18 or above	-	C92200	-
Phosphorous bronze	CAC502A	PBC2	195 or above	5 or above	60 or above (10 / 1,000)	-	CuSn10
	CAC502B	PBC2B	295 or above	5 or above	80 or above (10 / 1,000)	C90700	CuSn12
	CAC503B	PBC3B	265 or above	3 or above	90 or above (10 / 1,000)	C91000	CuSn12
Lead bronze	CAC602	LBC2	195 or above	10 or above	65 or above (10 / 500)	-	CuPb5Sn
	CAC603	LBC3	175 or above	7 or above	60 or above (10 / 500)	C93700	CuPb10Sn
	CAC604	LBC4	165 or above	5 or above	55 or above (10 / 500)	C93800	CuPb15Sn
	CAC605	LBC5	145 or above	5 or above	45 or above (10 / 500)	-	CuPb20Sn
	CAC607	C93200	207 or above	15 or above	-	C93200	-
Aluminum bronze	CAC701	AIBC1	440 or above	25 or above	80 or above (10 / 1,000)	C95200	CuAl10Fe
	CAC702	AIBC2	490 or above	20 or above	120 or above (10 / 1,000)	C95400	CuAl9Ni
	CAC703	AIBC3	590 or above	15 or above	150 or above (10 / 1,000)	C95800	CuAl10Ni
	CAC704	AIBC4	590 or above	15 or above	160 or above (10 / 1,000)	C95700	-
	CAC705	C95500	620 or above	6 or above	190 or above (10 / 3,000)	C95500	-
	CAC706	C95300	450 or above	20 or above	110 or above (10 / 3,000)	C95300	-
Silicon bronze	CAC801	SzBC1	345 or above	25 or above	-	C87400	-
	CAC802	SzBC2	440 or above	12 or above	-	C87500	CuZn15Si4
	CAC803	SzBC3	390 or above	20 or above	-	-	-

※ Refer to KS D 6024


Straight bushing SOB / SBSB

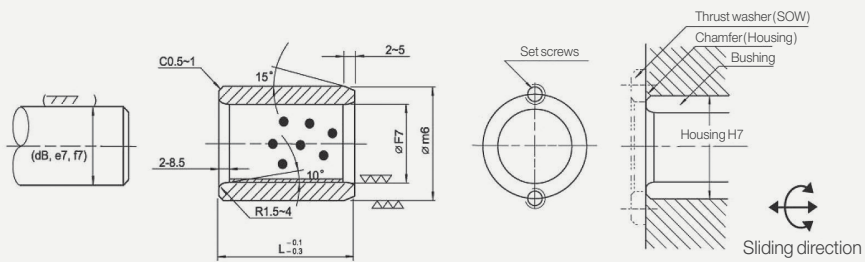

- Material
- SOB : #500SP (CAC304 + Graphite)
- Tolerance
- Housing : H7
 - Shaft : d8-For high load, f7-For high precision, b9-For underwater

Code	Dimension & Tolerance				Length (L-0.1 -0.3)								
	Inner diameter dF7		Outer diameter D m6		8	10	12	15	16	20	25	30	35
SOB SBSB	8	+0.028 / +0.013	12	+0.018 / +0.007	•	•	•	•					
	10	+0.028 / +0.013	14	+0.018 / +0.007	•	•	•	•		•			
	12	+0.034 / +0.016	18	+0.018 / +0.007		•	•	•	•	•	•	•	
	13	+0.034 / +0.016	19	+0.021 / +0.008		•		•		•			
	14	+0.034 / +0.016	20	+0.021 / +0.008		•	•	•		•	•	•	
	15	+0.034 / +0.016	21	+0.021 / +0.008		•	•	•	•	•	•	•	
	16	+0.034 / +0.016	22	+0.021 / +0.008		•	•	•	•	•	•	•	•
	18	+0.034 / +0.016	24	+0.021 / +0.008				•	•	•	•	•	•
	20	+0.041 / +0.020	28	+0.021 / +0.008				•	•	•	•	•	•
	20	+0.041 / +0.020	30	+0.021 / +0.008					•	•	•	•	•
	25	+0.041 / +0.020	33	+0.025 / +0.009					•	•	•	•	•
	25	+0.041 / +0.020	35	+0.025 / +0.009					•	•	•	•	
	30	+0.041 / +0.020	38	+0.025 / +0.009						• •	• •	• •	• •
	30	+0.041 / +0.020	40	+0.025 / +0.009						• •	• •	• •	• •
	31.5	+0.050 / +0.025	40	+0.025 / +0.009								• •	
	35	+0.050 / +0.025	44	+0.025 / +0.009						• •	• •	• •	• •
	35	+0.050 / +0.025	45	+0.025 / +0.009						• •	• •	• •	• •
	40	+0.050 / +0.025	50	+0.025 / +0.009						• •	• •	• •	• •
	40	+0.050 / +0.025	55	+0.030 / +0.011								• •	• •
	45	+0.050 / +0.025	55	+0.030 / +0.011								• •	• •
	45	+0.050 / +0.025	56	+0.030 / +0.011								• •	• •
	45	+0.050 / +0.025	60	+0.030 / +0.011								• •	• •
	50	+0.050 / +0.025	60	+0.030 / +0.011								• •	• •
	50	+0.050 / +0.025	62	+0.030 / +0.011								• •	• •
	50	+0.050 / +0.025	65	+0.030 / +0.011								• •	
	55	+0.060 / +0.030	70	+0.030 / +0.011									
	60	+0.060 / +0.030	74	+0.030 / +0.011								• •	• •
	60	+0.060 / +0.030	75	+0.030 / +0.011								• •	• •
	63	+0.060 / +0.030	75	+0.030 / +0.011									
	65	+0.060 / +0.030	80	+0.030 / +0.011									
	70	+0.060 / +0.030	85	+0.035 / +0.013									• •
	70	+0.060 / +0.030	90	+0.035 / +0.013									
	75	+0.060 / +0.030	90	+0.035 / +0.013									
	75	+0.060 / +0.030	95	+0.035 / +0.013									
	80	+0.060 / +0.030	96	+0.035 / +0.013									
	80	+0.060 / +0.030	100	+0.035 / +0.013									
	90	+0.071 / +0.036	110	+0.035 / +0.013									
	100	+0.071 / +0.036	120	+0.035 / +0.013									
	110	+0.071 / +0.036	130	+0.040 / +0.015									
	120	+0.071 / +0.036	140	+0.040 / +0.015									
	125	+0.083 / +0.043	145	+0.040 / +0.015									
	130	+0.083 / +0.043	150	+0.040 / +0.015									
	140	+0.083 / +0.043	160	+0.040 / +0.015									
	150	+0.083 / +0.043	170	+0.040 / +0.015									
	160	+0.083 / +0.043	180	+0.040 / +0.015									

• SOB • SBSB

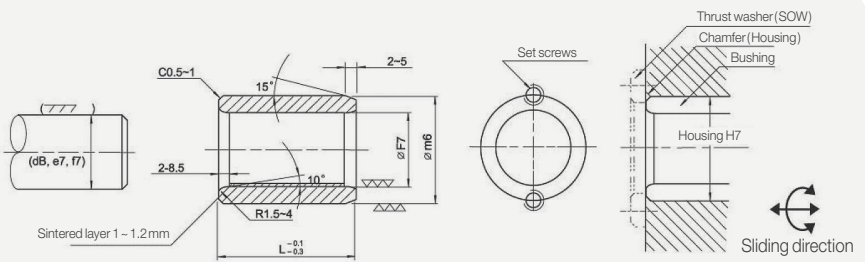

- Material
- SBSB : SS400 + Sintered layer
- Tolerance
- Housing : H7
 - Shaft : g6-General, f7-For high load

Length (L-0.1 -0.3)										Inner diameter d	Outer diameter D	Applicable Washer
40	50	60	70	80	100	120	130	140	150			
										8	12	-
										10	14	SOW-10
										12	18	SOW-12
										13	19	SOW-13
										14	20	SOW-14
										15	21	SOW-15
•										16	22	SOW-16
•										18	24	SOW-18
•	•									20	28	SOW-20
•										20	30	SOW-20
•	•	•								25	33	SOW-25
•	•	•								25	35	SOW-25
••	••	••								30	38	SOW-30
••	••	••								30	40	SOW-30
••										31.5	40	-
••	••	••								35	44	SOW-35
••	••	••								35	45	SOW-35
••	••	••	••	••						40	50	SOW-40
••	••	••	••							40	55	SOW-40
••	••	••								45	55	SOW-45
••	••	••								45	56	SOW-45
••	••	••	••	••						45	60	SOW-45
••	••	••	••	••						50	60	SOW-50
••	••	••	••	••						50	62	SOW-50
••	••	••	••	••	••					50	65	SOW-50
••	••	••	••	••						55	70	SOW-55
••	••	••	••	••	••					60	74	SOW-60
••	••	••	••	••	••	••				60	75	SOW-60
		••	••	••						63	75	-
••	••	••	••	••	••					65	80	SOW-65
••	••	••	••	••	••	••				70	85	SOW-70
		••	••	••	••					70	90	SOW-70
	••	••	••	••	••	••				75	90	SOW-75
		••	••	••	••	••	••			75	95	SOW-75
•	•	•	•	•	•	•				80	96	SOW-80
•	•	•	•	•	•	•		•		80	100	SOW-80
	•	•	•	•	•	•				90	110	SOW-90
	•	•	•	•	•	•		•		100	120	SOW-100
			•	•	•	•				110	130	-
				•	•	•		•		120	140	SOW-120
					•	•				125	145	-
					•		•			130	150	-
					•			•		140	160	-
					•				•	150	170	-
					•				•	160	180	-


How to order ➡ Code - dXDXL (Example) SOB -20X28X40

Flange bushing SFB



Detail of a

d	10 ~ 16	55	60 ~
a	R 0.3	R 0.5	R 1

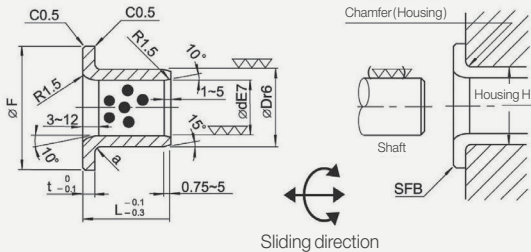

Material


● SOB : 500SP (CAC304 + Graphite)

Tolerance

- Housing : H7
- Shaft : d8 -For high load, f7 -For high precision, e7 -For light load

Code	Inner diameter d	Outer diameter D	Flange D F	Flange T t	Length (L-0.1 -0.3)										
					15	20	25	30	35	40	50	60	67.5	80	100
SFB	10	+0.040 +0.025	14	+0.034 +0.023	22	2	1015	1020							
	12	+0.050 +0.032	18	+0.034 +0.023	25	3	1215	1220							
	13	+0.050 +0.032	19	+0.041 +0.028	26	3	1315	1320							
	14	+0.050 +0.032	20	+0.041 +0.028	27	3	1415	1420							
	15	+0.050 +0.032	21	+0.041 +0.028	28	3	1515	1520	1525						
	16	+0.050 +0.032	22	+0.041 +0.028	29	3	1615	1620	1625						
	20	+0.061 +0.040	30	+0.041 +0.028	40	5	2015	2020		2030		2040			
	25	+0.061 +0.040	35	+0.050 +0.034	45	5		2520	2525	2530		2540			
	30	+0.061 +0.040	40	+0.050 +0.034	50	5				3030		3040	3050		
	31.5	+0.075 +0.050	40	+0.050 +0.034	50	5				31.535					
	35	+0.075 +0.050	45	+0.050 +0.034	60	5				3530		3540	3550		
	40	+0.075 +0.050	50	+0.050 +0.034	65	5				4030		4040	4050		
	45	+0.075 +0.050	55	+0.060 +0.041	70	5				4530		4540		4560	
	50	+0.075 +0.050	60	+0.060 +0.041	75	5				5030		5040		5060	
	55	+0.090 +0.060	65	+0.060 +0.041	80	5						5540		5560	
	60	+0.090 +0.060	75	+0.062 +0.043	90	7.5				6040	6050			6080	
	63	+0.090 +0.060	75	+0.062 +0.043	85	7.5							6367.5		
	70	+0.090 +0.060	85	+0.073 +0.051	105	7.5						7050		7080	
	75	+0.090 +0.060	90	+0.073 +0.051	110	7.5							7560		
	80	+0.090 +0.060	100	+0.073 +0.051	120	10							8060	8080	80100
	90	+0.107 +0.072	110	+0.076 +0.054	130	10							9060	9080	
	100	+0.107 +0.072	120	+0.076 +0.054	150	10								10080	100100
	120	+0.107 +0.072	140	+0.088 +0.063	170	10								12080	120100

Thrust washer SOW

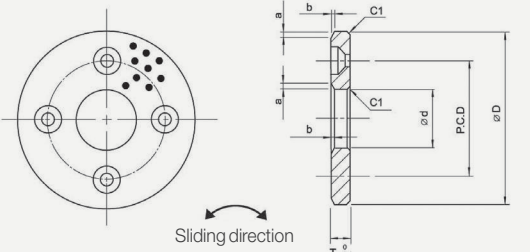


Material

● SOW : 500SP (CAC304 + Graphite)

Code	Nominal diameter	Inner diameter d	Outer diameter D	P.C.D	Set screws		Thickness T	a	b
					Dimension	Qt'y			
SOW	10	10.2	30	20	M3	2	3	1.5	0.3
	12	12.2	40	28	M3	2	3	2	0.4
	13	13.2	40	28	M3	2	3	2	0.4
	14	14.2	40	28	M3	2	3	2	0.4
	15	15.2	50	35	M3	2	3	2	0.4
	16	16.2	50	35	M3	2	3	2	0.4
	18	18.2	50	35	M3	2	3	2	0.4
	20	20.2	50	35	M5	2	5	2.5	0.4
	25	25.2	55	40	M5	2	5	2.5	0.4
	30	30.2	60	45	M5	2	5	2.5	0.4
	35	35.2	70	50	M5	2	5	2.5	0.4
	40	40.2	80	60	M6	2	7	3	0.5
	45	45.3	90	70	M6	2	7	3	0.5
	50	50.3	100	75	M6	4	8	4	0.7
	55	55.3	110	85	M6	4	8	4	0.7
	60	60.3	120	90	M8	4	8	5	0.9
	65	65.3	125	95	M8	4	8	5	0.9
	70	70.3	130	100	M8	4	10	5	0.9
	75	75.3	140	110	M8	4	10	5	0.9
	80	80.3	150	120	M8	4	10	5	0.9
	90	90.5	170	140	M10	4	10	5	0.9
	100	100.5	190	160	M10	4	10	5	0.9
	120	120.5	200	175	M10	4	10	5	0.9


Guide bushing SGB

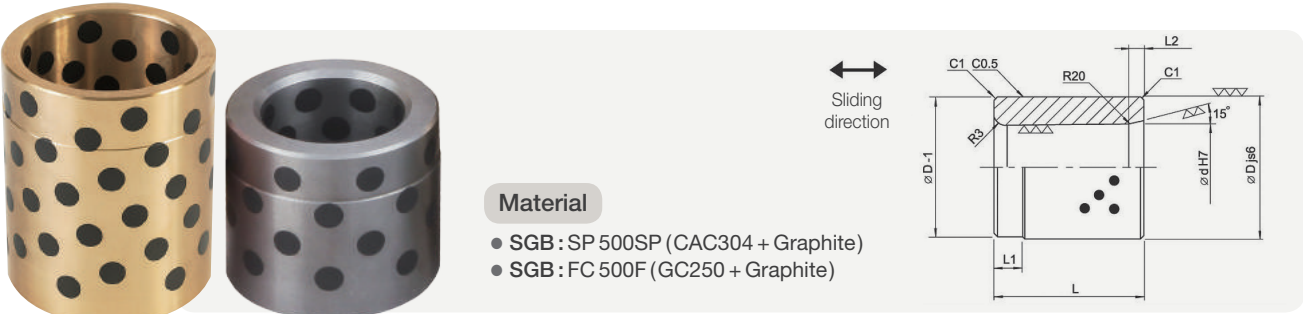

Code	Inner diameter d		Outer diameter D		Length			
					L		L1	L2
SGB	25	+0.021 / 0	40	± 0.008	40	0 / -0.2	10	5
	30	+0.021 / 0	50	± 0.008	50	0 / -0.2	10	5
	35	+0.025 / 0	60	± 0.0095	55	0 / -0.2	15	5
	40	+0.025 / 0	60	± 0.0095	50, 60	0 / -0.2	10	5
	50	+0.025 / 0	70	± 0.0095	50, 75	0 / -0.2	15	10
	60	+0.030 / 0	80	± 0.011	60, 90	0 / -0.2	20	10
	80	+0.030 / 0	100	± 0.011	100, 120	0 / -0.2	25	10
	100	+0.035 / 0	120	± 0.011	150	0 / -0.2	25	10
	120	+0.035 / 0	140	± 0.0125	180	0 / -0.2	25	10

How to order ➡ Code - d X L - Material (Example) SGB - 20 X 20 - FC


Guide bushing SGO9834 (DIN 9834)

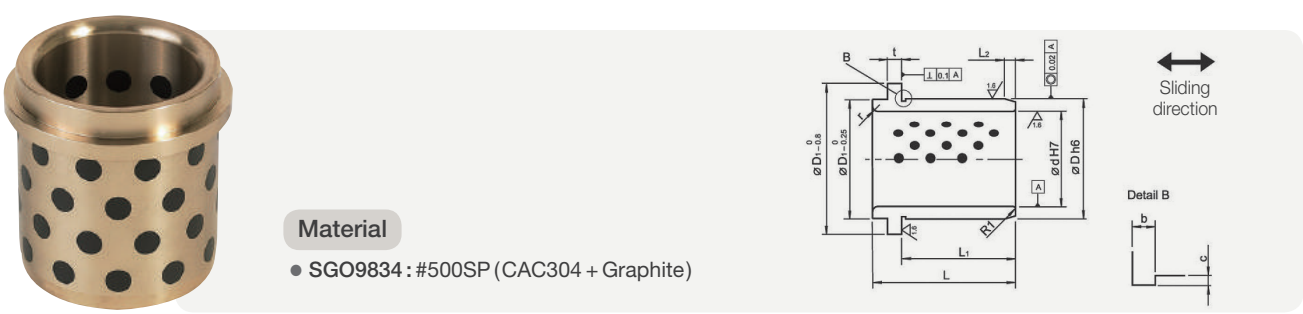

Code	d	H7	D	h6	L	D1	L1	L2	t	r	bxc
SGO9834-025	25	+0.021 / 0	32	0 / -0.016	40	40	30	3	6.3	3	0.6 X 0.3
SGO9834-032	32	+0.025 / 0	40	0 / -0.016	50	50	40	4	6.3	3	
SGO9834-040	40	+0.025 / 0	50	0 / -0.016	63	63	50	5	6.3	3	
SGO9834-050	50	+0.025 / 0	63	0 / -0.019	71	71	56	6.3	6.3	5	
SGO9834-063	63	+0.030 / 0	80	0 / -0.019	80	90	63	8	10	6	1.0 X 0.4
SGO9834-080	80	+0.030 / 0	100	0 / -0.022	100	112	80	10	10	8	
SGO9834-100	100	+0.035 / 0	125	0 / -0.025	125	140	106	12.5	10	10	
SGO9834-125	125	+0.040 / 0	160	0 / -0.025	160	180	132	16	10	12	
SGO9834-160	160	+0.040 / 0	200	0 / -0.029	200	220	170	16	10	18	

How to order ➡ Code (Example) SGO9834-025 Make-to-order


Guide flange bushing SGFB

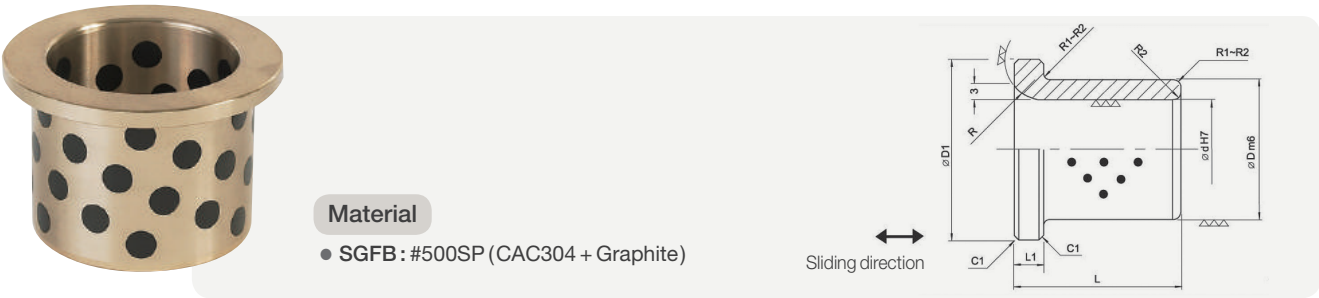

Code	Inner diameter d		Outer diameter D		Flange D1	Length		Flange T	R
						L		L1	
SGFB	25	+0.021 / 0	35	+0.025 / +0.009	45	40	0 / -0.3	7	10
	30	+0.021 / 0	40	+0.025 / +0.009	50	50	0 / -0.3	10	20
	40	+0.025 / 0	55	+0.030 / +0.011	65	70	0 / -0.3		
	50	+0.025 / 0	65	+0.030 / +0.011	75	80	0 / -0.3		
	60	+0.030 / 0	75	+0.030 / +0.011	85				
	65	+0.030 / 0	80	+0.030 / +0.011	90				
	80	+0.030 / 0	100	+0.035 / +0.013	110	120	0 / -0.3		
						100	0 / -0.3		
						140	0 / -0.3		
100	+0.035 / 0	120	+0.035 / +0.013	130	100	0 / -0.3			
					140	0 / -0.3			

How to order ➡ Code - d X L (Example) SGFB - 80 X 100

Guide bushing SGO61

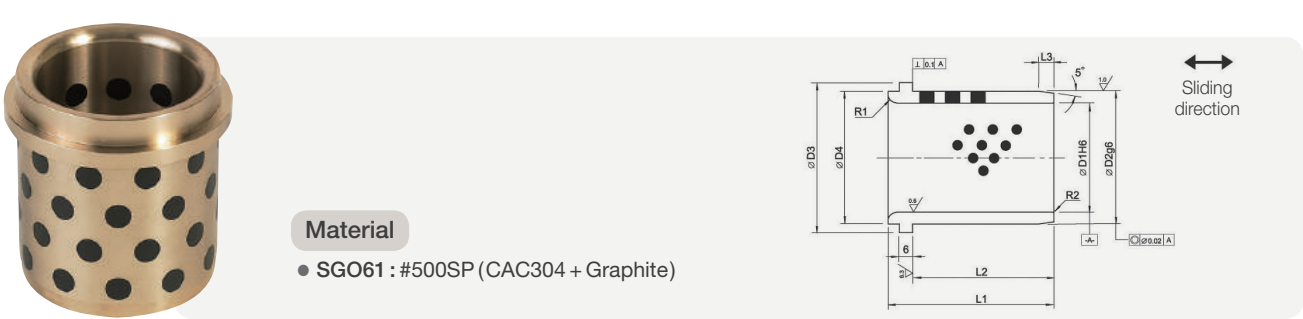

Code	D1	D2	D3	D4	L1	L2	L3	R1
SGO612540	25	32	40	32	40	30	4	3
SGO613250	32	40	50	40	50	40	4	3
SGO614063	40	50	63	50	63	50	5	3
SGO615071	50	63	71	63	71	56	6	5
SGO616380	63	80	90	80	80	63	8	6
SGO618010	80	100	112	100	100	80	10	8
SGO611012	100	125	140	125	125	106	12	10
SGO611114	115	140	155	140	140	120	12	10
SGO611216	125	160	180	160	160	132	12	12


How to order ➡ Code (Example) SGO613250 Make-to-order

Guide bushing SGO71



Material


- SGO71 : #500SP (CAC304 + Graphite)

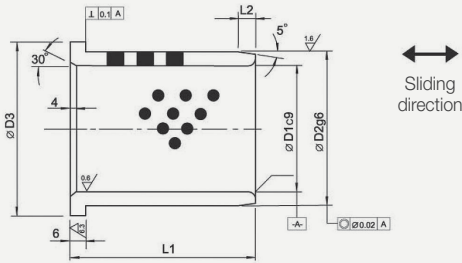

Code	D1	D2	D3	L1	L2
SGO712540	25	32	40	40	4
SGO713250	32	40	50	50	4
SGO714055	40	50	63	55	5
SGP715063	50	63	71	63	6
SGO716375	63	80	90	75	8
SGO718090	80	100	112	90	10
SGO711011	100	125	140	115	12
SGO711213	125	160	180	138	12


How to order ➡ Code (Example) SGO718090 Make-to-order

Develon Guide flange bushing SBSF



Material

- SBSF : Develon 200S (SS400 + Sintered layer)



Code	ØdH7	ØDm6	ØD1	L	L1
SBSF-25	25	35	45	40	7
SBSF-30	30	40	50	50	10
SBSF-40	40	55	64	70	10
SBSF-50	50	65	75	80	10
SBSF-60	60	75	85	80	10
SBSF-65S	65	80	90	80	10
SBSF-65L	65	80	90	120	10
SBSF-80S	80	100	110	100	10
SBSF-80L	80	100	110	140	10
SBSF-100S	100	120	130	100	10
SBSF-100L	100	120	130	140	10


How to order ➡ Code (Example) SBSF-65S Make-to-order

Spherical bearing SOSB



Tolerance

Tolerance	Shaft	Use
d8	N7	High load
e7	H7	Low load




Material

Inner Ring : #500SP (CAC304 + Graphite) Ouer Ring : Bearing steel (SUJ2)

Code		d H7		D1 h6		B	C	D	b	Alignment angle a
SOSB	015	15	+0.018 / 0	26	0 / -0.013	12	9	22	4	8
	020	20	+0.021 / 0	32	0 / -0.016	16	14	28	4	4
	025	25	+0.021 / 0	42	0 / -0.016	21	18	36	4	5
	030	30	+0.021 / 0	50	0 / -0.016	27	23	44	4	6
	035	35	+0.025 / 0	55	0 / -0.019	30	26	49	4	5
	040	40	+0.025 / 0	62	0 / -0.019	33	28	55	4	6
	045	45	+0.025 / 0	72	0 / -0.019	36	31	62	4	5
	050	50	+0.025 / 0	80	0 / -0.019	42	36	70	4	5
	060	60	+0.030 / 0	100	0 / -0.022	53	45	90	4	6
	070	70	+0.030 / 0	110	0 / -0.022	58	50	99	4	5
	080	80	+0.030 / 0	130	0 / -0.022	70	60	115	4	6
	090	90	+0.035 / 0	140	0 / -0.025	76	65	125	4	6
	100	100	+0.035 / 0	160	0 / -0.025	88	75	145	6	6
	110	110	+0.035 / 0	170	0 / -0.025	93	80	155	6	5
	120	120	+0.035 / 0	190	0 / -0.029	105	90	170	6	6
	130	130	+0.040 / 0	200	0 / -0.029	110	95	180	6	5
	140	140	+0.040 / 0	210	0 / -0.029	90	70	180	6	7
	150	150	+0.040 / 0	220	0 / -0.029	120	105	200	6	5
	160	160	+0.040 / 0	230	0 / -0.029	105	80	200	6	8
	180	180	+0.040 / 0	260	0 / -0.032	105	80	225	6	6
	200	200	+0.046 / 0	290	0 / -0.032	130	100	250	6	7
	220	220	+0.046 / 0	320	0 / -0.036	135	100	275	6	8
	240	240	+0.046 / 0	340	0 / -0.036	140	100	300	9	8
	260	260	+0.056 / 0	370	0 / -0.036	150	110	325	9	7
	280	280	+0.056 / 0	400	0 / -0.036	155	120	350	9	6
	300	300	+0.056 / 0	430	0 / -0.040	165	120	375	9	7

How to order ➡ Code (Example) SOSB-015 Make-to-order

Fixing direction




Slide insertion type

▶ ID (15 ~ 90)
▶ Loading direction perpendicular to the spherical insertion groove

Split bushing type

▶ Over ID 100
▶ Loading direction perpendicular to the split surface.

Fixing method

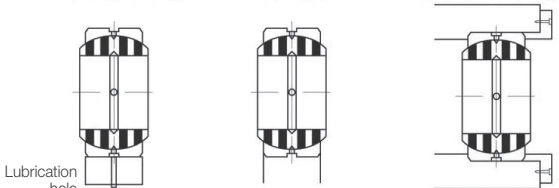


Press-fit / Cooling fit

Fixing bolt





Non-loosening plate

Wear plate SWP / SBP


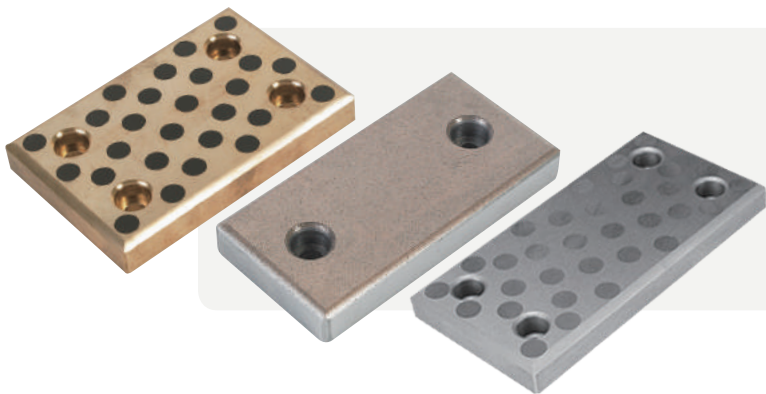


- Material
- SWP-SP : #500SP (CAC304 + Graphite)
 - SWP-FC : 500F (GC250 + Graphite)
 - SBP : 200S (SS400 + Sintered layer)


- Tolerance
- Thickness tolerance : +/-0.01

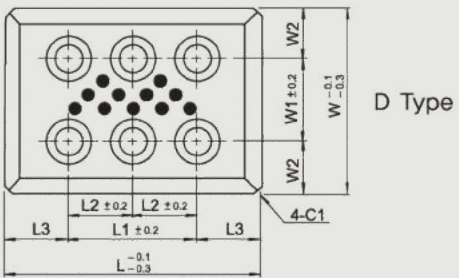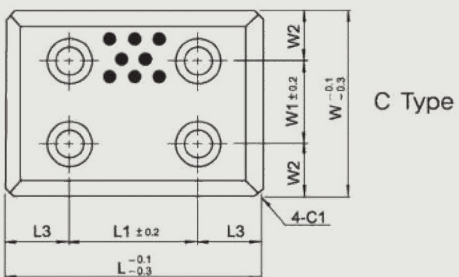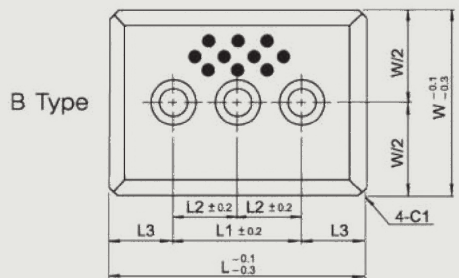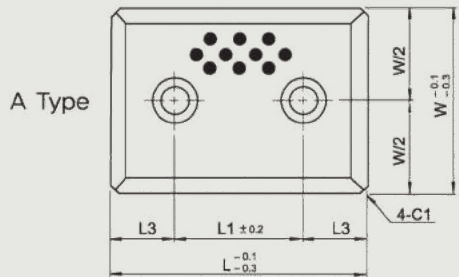

Chamfer according to Width

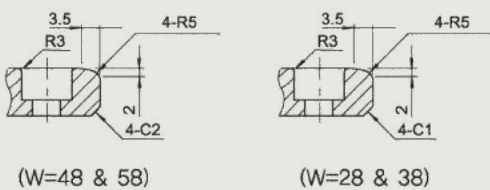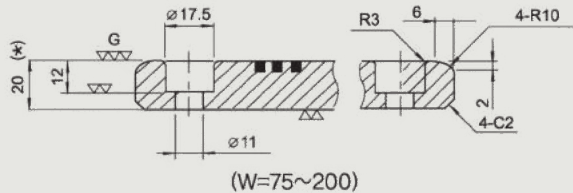

(1) W=28 & 38



(2) W=48 & 200




(3) SS400 + Sintered Layer



Code	W	L	Bolt hole					Type			
			W1	W2	L1	L2	L3				
SWP SBP	28	75	-	-	45	-	15	A			
		100			50		25				
		150			100						
		200			150						
		250			200						
		300			250	125	B				
	38	75			45	-	15	A			
		100			50		25				
		125			75						
		150			100						
		200			150						
		250			200						
	300	250			125	B					
	48	75			45	-	15	A			
		100			50		25				
		125			75						
		150			100						
		200			150						
		250			200						
	300	250			125	B					
	58	75			45	-	15	A			
		100			50		25				
		150			100						
		200			150						
		250			200						
		300			250		125	B			
	75	75			45	-	25	A			
		100			50						
		125			75						
		150			100						
		200			150						
		250			200						
	300	250			125	B					
	100	100			50	25	50	-	50 (25)	C (D)	
		125					75				
		150					100				
		200					150				
		250					200				
		300					200 (250)	- (125)			
	125	125				37.5	75	-	25	C	
		150									
		200									
		250									
		300						200 (250)	- (125)	50 (25)	C (D)
		350					200	75	C		
	150	100				25	100	-		25	C
							200				
							250				
							300	- (125)			
	200	150				25	150	-	25	C	
							250				
							300				- (125)

Thin wear plate STWP / SBPT

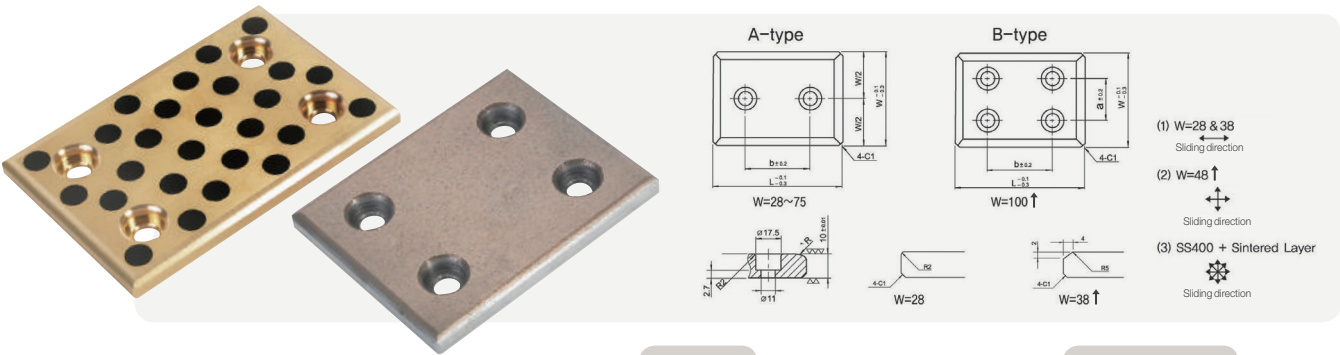

Material

- STWP : #500SP (CAC304 + Graphite)
- SBPT : 200S (SS400 + Sintered layer)


Mounting bolt

- Low head socket cap screw

Code	W	L	a	b	Type	Bolt Qt'y
STWP SBPT	28	75	-	45	A	2
		100		50		
		125		75		
		150		100		
		175		125		
	38	75		45		
		100		50		
		125		75		
		150		100		
	48	75		45		
		100		50		
		125		75		
		150		100		
		200		150		
	58	75		45		
		100		50		
		125		75		
		150		100		
		200		150		
	75	75		25		
		100		50		
		125		75		
		150		100		
		175		125		
	100	100		50	B	4
		125		75		
		150		100		
		200		150		
		250		200		
	125	150		100		
		200		150		
		250		200		
		300		250		
	150	150		100		
		200		150		

How to order ➡ Code - W X L (Example) STWP - 75X100

Sliding plate SP

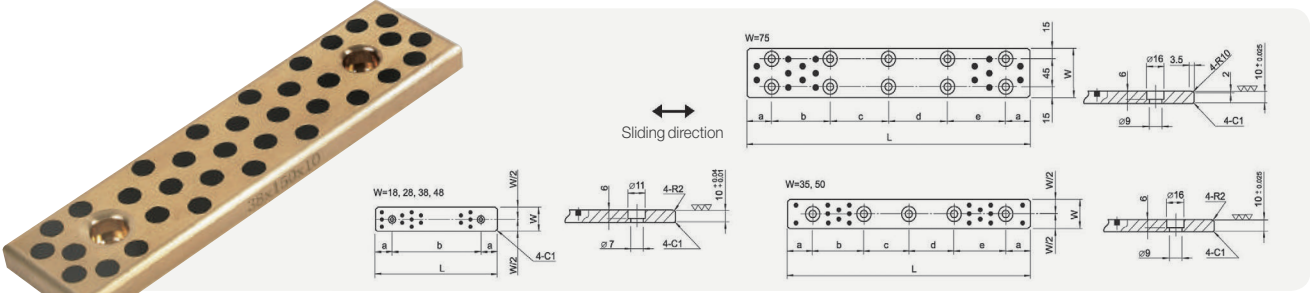

Material


- SP : #500SP (CAC304 + Graphite)

Code	W	L		Bolt					Mounging bolt	
		Dimension	Tolerance	a	b	c	d	e	Size	Qt'y
SP	18	75	0 / -0.2	15	45				M6	2
		100		25	50					
		125		25	75					
		150		25	100					
	28	75	0 / -0.2	15	45				M6	2
		100		25	50					
		125		25	75					
		150		25	100					
	35	100	0 / -0.3	20	60				*M8	3
		150		20	55	55				
		200		20	55	50	55			
		250		20	70	70	70			
		300		20	65	65	65	65		
		350		20	80	75	75	80		
	38	75	0 / -0.2	15	45				M6	2
		100		25	50					
		125		25	75					
		150		25	100					
	48	75	0 / -0.2	15	45				M6	2
		100		25	50					
		125		25	75					
		150		25	100					
	50	100	0 / -0.3	20	60				*M8	3
		150		20	55	55				
		200		20	55	50	55			
		250		20	70	70	70			
		300		20	65	65	65	65		
	75	400	0 / -0.5	20	90	90	90	90	*M8	4
		150	0 / -0.2	20	110					
		200	0 / -0.3	20	80	80				
		250		20	105	105				
		300		20	85	90	85			
	500	400	0 / -0.5	20	120	120	120			8
		500		20	115	115	115	115		

* Mark : Low head socket cap screw

How to order ➡ Code - W X L (Example) SP - 38X100

Wear plate SWPV / SBPV

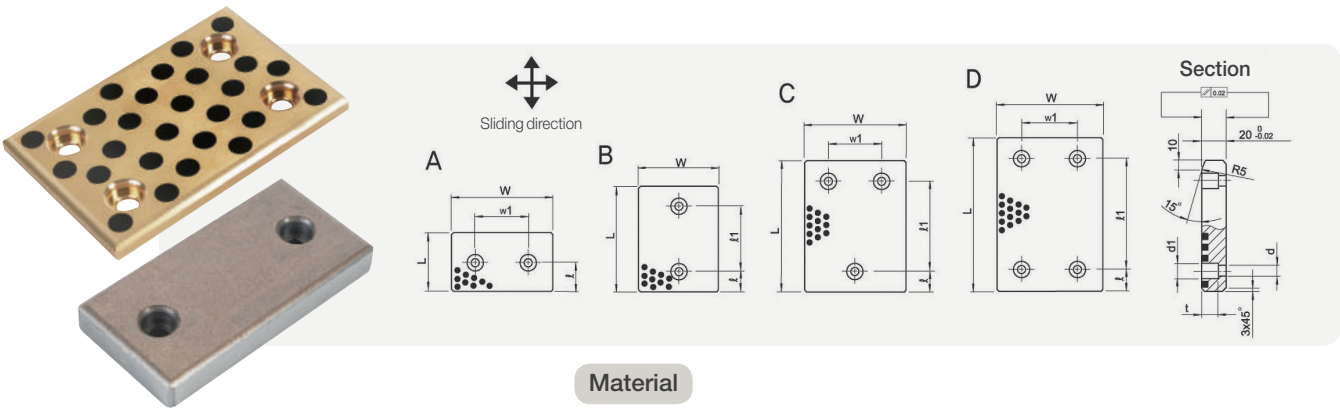


Material

● SWPV : #500SP (CAC304 + Graphite) ● SBPV : 200S (SS400 + Sintered layer)

Code	W	L	ℓ	ℓ 1	w1	d	d1	t	Type	Bolt Qt'y
SWPV SBPV	50	80	25	30	-	9	15	9	B	2
		100		50		13.5	20	13		
		125		75						
		160		110						
		200		150						
	80	50	40	-	30	13.5	20	13	A	
		80		30	-					
		100		50						
		125		75						
		160		110						
		200		150						
		250		170						
		315		235						
	100	50	25	-	50				-	
		80	40	-						
		100	25	50	75					
		125		75						
		160		110						
		200		150						
		250	170							
	315	40	235							
	125	50	25	-	75					
		80	40	-						
		100	25	50						
		125		75						
		160		110						
		200		150						
		250	170							
	315	40	235							
	160	50	25	-					110	
		80	40	-						
		100	25	50						
		125		75						
		160		110						
		200		150						
		250	170							
		315	40	235						

How to order ➡ Code - W X L (Example) SWPV - 100 X 100 Make-to-order

Sliding liner SL

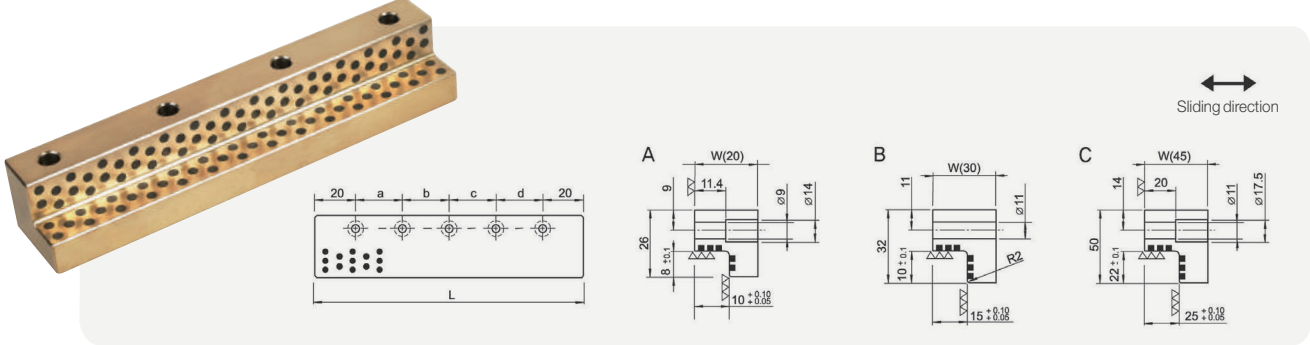


Material

● SL : #500SP (CAC304 + Graphite)

Code	W	L	Bolt hole				Mounting bolt		Type
			a	b	c	d	Size	Qt'y	
SL	20	100	60	-	-	-	M8	2	A
		150	55	55	-			3	
		200		50	55			4	
	30	100	60	-	-		M10	2	B
		150	55	55	-			3	
		200		50	55			4	
		250		70	70				
	45	200	55	50	55			5	C
		250	70	70	70				
		300	65	65	65	65			
		350	80	75	75	80			


How to order ➡ Code - W X L (Example) SL - 20 X 100

Conical plugs for sliding plates (Design registration)

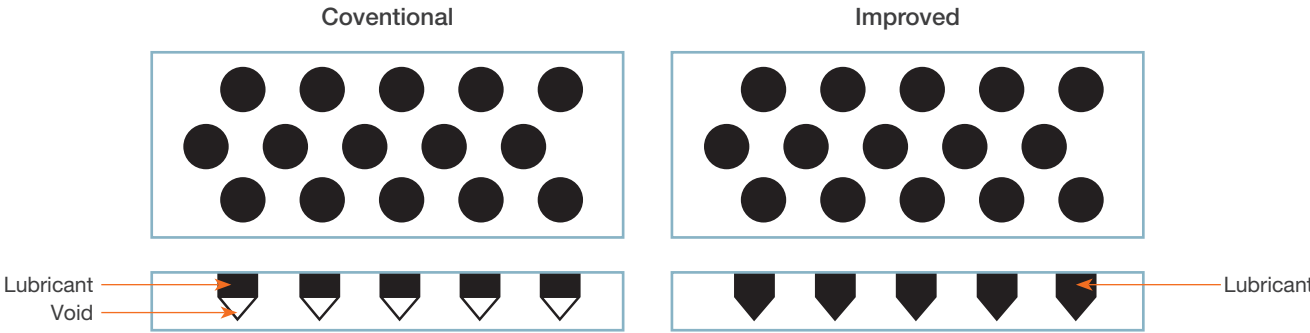

► Void inside the sliding plate, causing sinking or swelling problems, is eliminated by forming the lubricant in a cone shape.

Cam bottom plate SCBS / SCBSL

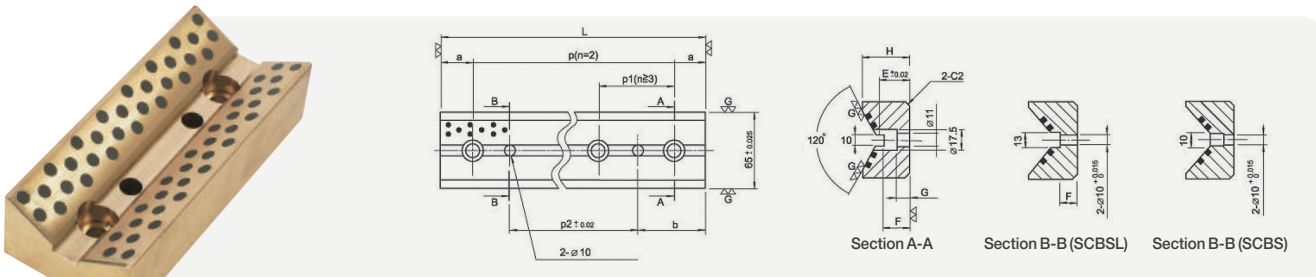


Material ● SCBS / SCBSL : #500SP (CAC304 + Graphite)

Code	L	H	E	F	G	a	p1	Bolt hole Q'ty	b	p2	p		
SCBS	100	35	18	15	8	20	-	2	40	20	60		
	125					25		50	2	25	50	25	-
	150									3		50	
	200									4		100	
	250									5		150	
	300									6		200	
SCBL	100	37	20	20	10	20	-	2	40	20	60		
	125					25		75	2	50	25	75	
	150										3	100	-
	200										100	150	
	250										150	200	
	300										125	200	

How to order ➔ Code - L (Example) SCBS - 150

Cam bottom steel plate SCBSP/ SCBSPL

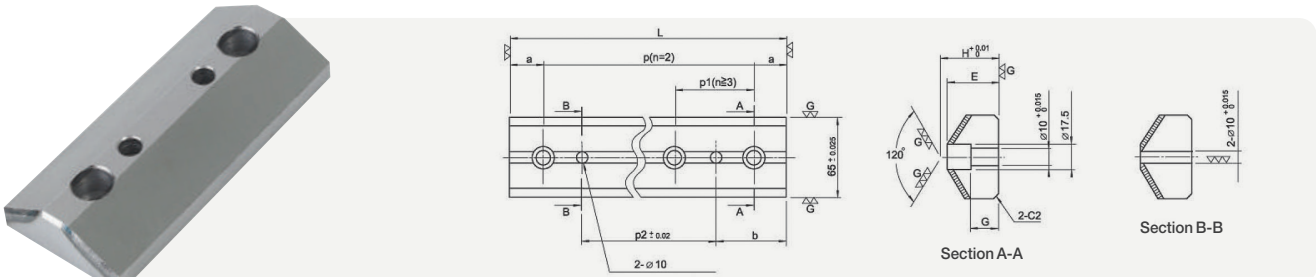


Material ● SCBSP / SCBSPL : SM45C + HRC 50
(High frequency quenching on hatched area)

Assembly	①	②	H
	SCBS	SCBSP	65
	SCBSL	SCBSPL	50

Code	L	H	E	G	a	p1	Bolt hole Q'ty	b	p2	p
SCBSP	100	47	44	20	20	-	2	40	20	60
	125				25			50	50	25
	150					3	50			
	200					4	100			
	250					5	150			
	300				6	200				
SCBSPL	100	37	26	10	20	-	2	40	20	60
	125				25			75	3	50
	150					100	50			
	200						150		-	
	250						125			
	300									

How to order ➔ Code - L (Example) SCBSP - 150

SGO U/C bearing

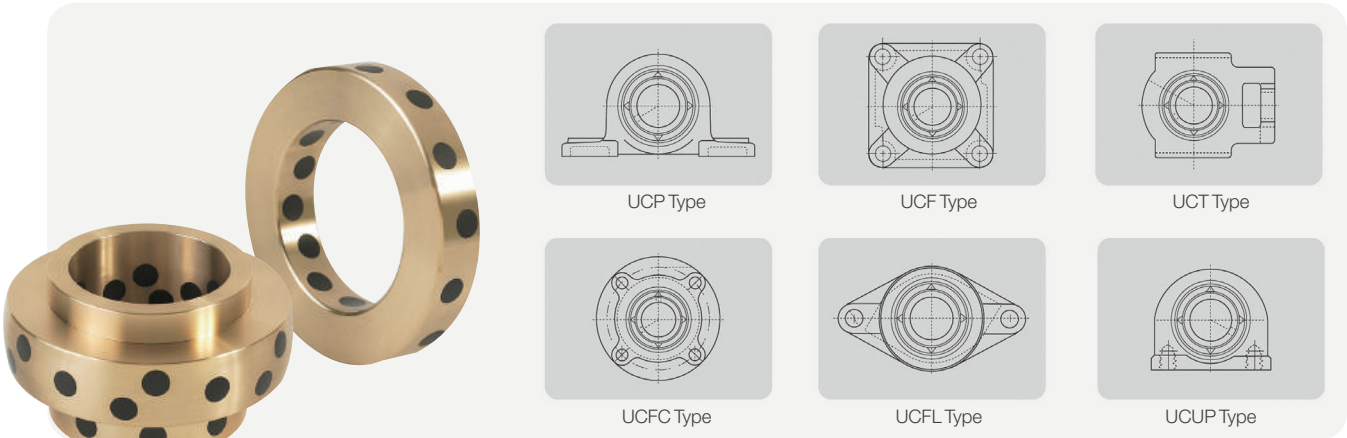


● Type : Case specification

Bearing No.	Shaft (mm)
UC 201	12
UC 202	15
UC 203	17
UC 204	20
UC 205	25
UC 206	30
UC 207	35
UC 208	40
UC 209	45
UC 210	50
UC 211	55
UC 212	60
UC 213	65
UC 214	70
UC 215	75
UC 216	80
UC 217	85
UC 218	90
UC 305	25
UC 306	30
UC 307	35

Bearing No.	Shaft (mm)
UC 308	40
UC 309	45
UC 310	50
UC 311	55
UC 312	60
UC 313	65
UC 314	70
UC 315	75
UC 316	80
UC 317	85
UC 318	90
UC 319	95
UC 320	100
UC 321	105
UC 322	110
UC 324	120
UC 326	130
UC 328	140

How to order ➔ Bearing No. (Example) UC201
Make-to-order

Dry bearing SDU Pb-Free

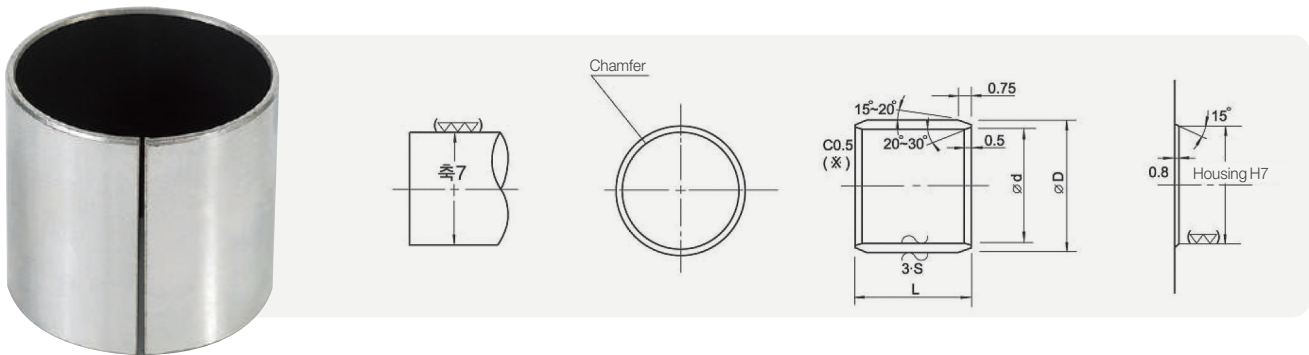

Bushing		Shaft diameter		Housing diameter		Length							
ID Ød	OD ØD					3	4	5	6	7	8	10	12
3	5	3	-0.025 / -0.034	5 (H7)	+0.012 / 0	0303	0304	0305	0306				
4	6	4	-0.025 / -0.037	6 (H7)	+0.012 / 0		0404		0406		0408		
5	7	5	-0.025 / -0.037	7 (H7)	+0.015 / 0	0503	0504	0505	0506		0508		
6	8	6	-0.025 / -0.037	8 (H7)	+0.015 / 0			0605	0606	0607	0608	0610	
7	9	7	-0.025 / -0.040	9	+0.015 / 0			0705	0706	0707		0710	0712
8	10	8	-0.025 / -0.040	10 (H7)	+0.015 / 0			0805	0806	0807	0808	0810	0812
9	11	9	-0.025 / -0.040	11	+0.015 / 0							0910	
10	12	10	-0.025 / -0.040	12 (H7)	+0.018 / 0				1006	1007	1008	1010	1012
12	14	12	-0.025 / -0.043	14	+0.018 / 0				1206		1208	1210	1212
13	15	13	-0.025 / -0.043	15	+0.018 / 0						1308	1310	
14	16	14	-0.025 / -0.043	16	+0.018 / 0							1410	1412
15	17	15	-0.025 / -0.043	17	+0.018 / 0						1508	1510	1512
16	18	16	-0.025 / -0.043	18	+0.018 / 0							1610	1612
17	19	17	-0.025 / -0.043	19	+0.021 / 0							1710	
18	20	18	-0.025 / -0.043	20 (H7)	+0.021 / 0							1810	1812
19	22	19	-0.025 / -0.045	22	+0.021 / 0							1910	
20	23	20	-0.025 / -0.045	23	+0.021 / 0							2010	2012
22	25	22	-0.025 / -0.045	25	+0.021 / 0							2210	2212
24	27	24	-0.025 / -0.045	27	+0.021 / 0								
25	28	25	-0.025 / -0.045	28	+0.021 / 0							2510	2512
26	30	26	-0.025 / -0.045	30	+0.021 / 0								
28	32	28	-0.025 / -0.045	32 (H7)	+0.025 / 0								2812
30	34	30	-0.025 / -0.045	34	+0.025 / 0								3012
31	35	31	-0.025 / -0.050	35	+0.025 / 0								
32	36	32	-0.025 / -0.050	36	+0.025 / 0								
35	39	35	-0.025 / -0.050	39	+0.025 / 0								3512
38	42	38	-0.025 / -0.050	42	+0.025 / 0								4012
40	44	40	-0.025 / -0.050	44	+0.025 / 0								
45	50	45	-0.025 / -0.050	50	+0.025 / 0								
50	55	50	-0.025 / -0.050	55 (H7)	+0.030 / 0								
55	60	55	-0.025 / -0.055	60	+0.030 / 0								
60	65	60	-0.025 / -0.055	65	+0.030 / 0								
65	70	65	-0.035 / +0.005	70	+0.030 / 0								
70	75	70	-0.035 / +0.005	75	+0.030 / 0								
75	80	75	-0.035 / +0.005	80	+0.030 / 0								
80	85	80	-0.035 / +0.005	85 (H7)	+0.035 / 0								
85	90	85	+0.035 / 0	90	+0.035 / 0								
90	95	90	+0.035 / 0	95	+0.035 / 0								
100	105	100	+0.035 / 0	105	+0.035 / 0								
110	115	110	+0.035 / 0	115	+0.035 / 0								
120	125	120	+0.035 / 0	125 (H7)	+0.040 / 0								
130	135	130	+0.035 / 0	135	+0.040 / 0								
140	145	140	+0.035 / 0	145	+0.040 / 0								
150	155	150	+0.035 / 0	155	+0.040 / 0								
160	165	160	+0.035 / 0	165	+0.040 / 0								


Operation condition

Contact pressure P	Velocity V	PV value	Temperature	Lubrication
kgf / cm ²	m / min	kgf / cm ² · m / min	℃	
250 (1400)	15 ~ 60	1050 (2100)	-200 ~ +250	Dry

※ () : indicates static allowable contact pressure with no sliding at extremely low velocity of under 6m/min


Length												
15	20	25	30	35	40	50	60	70	80	90	95	100
0815												
1015	1020											
1215	1220											
1315												
1415	1420											
1515	1520	1525										
1615	1620	1625										
1715												
1815	1820	1825										
1915												
2015	2020	2025	2030									
2215	2220	2225	2230									
2415	2420	2425	2430									
2515	2520	2525	2530	2535								
2615	2620	2625	2630									
2815	2820	2825	2830									
3015	3020	3025	3030	3035	3040							
3115		3125			3140							
	3220	3225	3230		3240							
	3520	3525	3530	3535	3540	3550						
	3820	3825	3830	3835	3840							
4015	4020	4025	4030	4035	4040	4050						
	4520	4525	4530	4535	4540	4550						
	5020	5025	5030	5035	5040	5050	5060					
		5525	5530	5535	5540	5550	5560					
			6030	6035	6040		6060					
			6530		6540	6550	6560					
			7030	7035	7040	7050	7060					
			7530	7535	7540	7550	7560		7080			
					8040	8050	8060		7580			
					8540	8550	8560		8080			
					9040		9060		8580	9090		
						10050		10070			10095	
						11050		11070			11095	
						12050		12070			12095	
						13050			13080			
						14050			14080			140100
						15050			15080			150100
						16050			16080			160100

Dry bearing SDUF Pb-Free

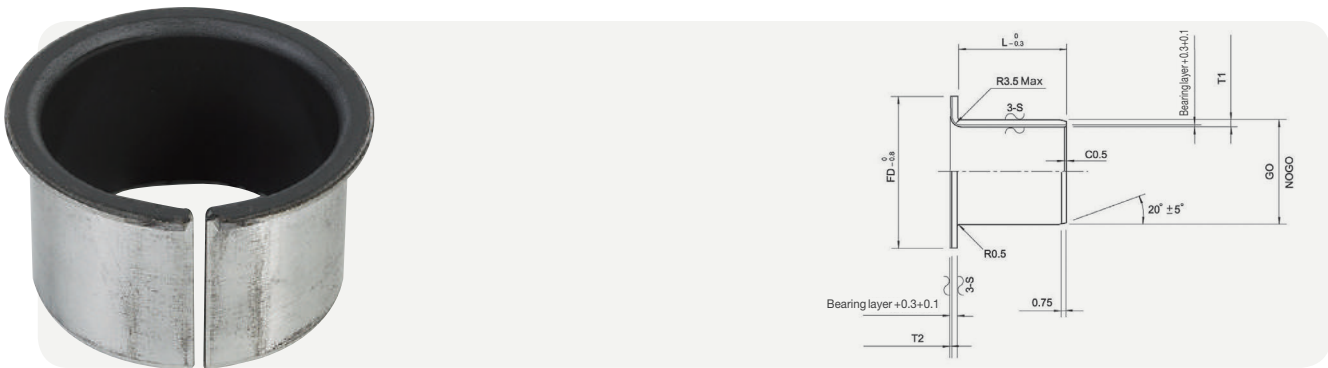

Bushing		Recommended tolerance				Thickness				Length												
ID	Flange D ØFD	Housing tolerance H7		Shaft		T1		T2		6	8	10	12	15	20	25	30	40	50	60		
3	7	4.6	+0.012 / 0	3	-0.025 / -0.035	0.8	⁰ -0.035	0.8	⁰ -0.15													
4	9	5.6	+0.012 / 0	4	-0.025 / -0.037	1.0	⁰ -0.025	1.0	⁰ -0.15	0406-9												
5	10	7	+0.015 / 0	5	-0.025 / -0.037					0506-10												
6	12	8	+0.015 / 0	6	-0.025 / -0.037					0606-12	0608-12	0610-12										
7	13	9	+0.015 / 0	7	-0.025 / -0.040							0710-13	0712-13									
8	15	10	+0.015 / 0	8	-0.025 / -0.040					0806-15	0808-15	0810-15	0812-15									
10	18	12	+0.018 / 0	10	-0.025 / -0.040					1006-18	1008-18	1010-18	1012-18	1015-18								
12	20	14	+0.018 / 0	12	-0.025 / -0.043					1206-20	1208-20	1210-20	1212-20	1215-20	1220-20							
14	22	16	+0.018 / 0	14	-0.025 / -0.043							1410-22	1412-22	1415-22	1420-22							
15	23	17	+0.018 / 0	15	-0.025 / -0.043							1510-23	1512-23	1515-23	1520-23	1525-23						
16	24	18	+0.018 / 0	16	-0.025 / -0.043							1610-24	1612-24	1615-24	1620-24	1625-24						
18	26	20	+0.021 / 0	18	-0.025 / -0.043			1810-26	1812-26	1815-26	1820-26	1825-26										
20	31	23	+0.021 / 0	20	-0.025 / -0.046	1.5	⁰ -0.025	1.5	⁰ -0.15			2010-31	2012-31	2015-31	2020-31	2025-31	2030-31					
22	33	25	+0.021 / 0	22	-0.025 / -0.046							2210-33	2212-33	2215-33	2220-33	2225-33						
24	35	27	+0.021 / 0	24	-0.025 / -0.046									2415-35	2420-35	2425-35	2430-35					
25	36	28	+0.021 / 0	25	-0.025 / -0.046							2510-36	2512-36	2515-36	2520-36	2525-36	2530-36					
26	38	30	+0.021 / 0	26	-0.025 / -0.046	2.0	⁰ -0.025	2.0	⁰ -0.15					2615-38	2620-38							
28	40	32	+0.025 / 0	28	-0.025 / -0.046								2812-40	2815-40	2820-40		2830-40					
30	42	34	+0.025 / 0	30	-0.025 / -0.046								3012-42	3015-42	3020-42	3025-42	3030-42	3040-42				
31	45	35	+0.025 / 0	31	-0.025 / -0.050											3125-45						
32	46	36	+0.025 / 0	32	-0.025 / -0.050										3220-46	3225-46	3230-46					
35	49	39	+0.025 / 0	35	-0.025 / -0.050								3512-49		3520-49	3525-49	3530-49	3540-49	3550-49			
38	52	42	+0.025 / 0	38	-0.025 / -0.050										3820-52		3830-52	3840-52				
40	54	44	+0.025 / 0	40	-0.025 / -0.050								4012-54		4020-54	4025-54	4030-54	4040-54	4050-54			
45	60	50	+0.025 / 0	45	-0.025 / -0.050	2.5	⁰ -0.025	2.5	⁰ -0.15					4520-60	4525-60	4530-60	4540-60	4550-60				
50	65	55	+0.030 / 0	50	-0.025 / -0.050									5020-65		5030-65	5040-65		5060-65			
55	70	60	+0.030 / 0	55	-0.025 / -0.055											5530-70	5540-70		5560-70			
60	75	65	+0.030 / 0	60	-0.025 / -0.055											6030-75	6040-75		6060-75			

Dry bearing SWC Pb-Free

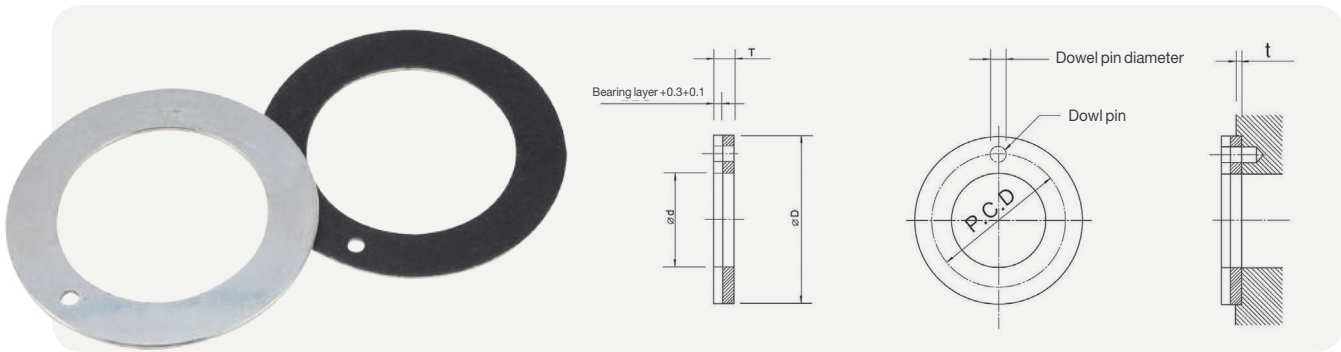

Code	Nominal	ID Ød		OD ØD		Thickness T		Dowel pin				Housing depth t				
								Dowel pin diameter		P.C.D						
SWC 06	6	8	+0.025 0	16	0 -0.25	1.5	-0.03 -0.08	1.100	+0.20 0	12	±0.12	1.0	+0.20 -0.05			
SWC 08	8	10		18						14	±0.12					
SWC 10	10	12		24				1.625		18	±0.12					
SWC 12	12	14		26						20	±0.12					
SWC 14	14	16		30				2.125		23	±0.12					
SWC 16	16	18		32						25	±0.12					
SWC 18	18	20		36						28	±0.12					
SWC 20	20	22		38				3.125	+0.25 0	30	±0.12					
SWC 22	22	24		42						33	±0.12					
SWC 24	24	26		44						35	±0.12					
SWC 25	25	28		48				4.125		38	±0.12					
SWC 30	30	32		54						43	±0.12					
SWC 35	35	38		62						50	±0.12					
SWC 40	40	42		66						54	±0.12					
SWC 45	45	48		74		2.0				61	±0.12	1.5				
SWC 50	50	52		78						65	±0.12					

Extrusion Material



High Strength Brass

- Excellent strength, hardness, corrosion resistance, and toughness
- Superior abrasion resistance in high load.
- Used such as bearing, valve seat, lever, arm, gear, fittings for ship, sliding parts with low speed and high load, bearing for bridge, nut, slipper, and water pressure cylinder parts.

Available type and dimension

Type	Dimension	Remarks
Solid bar	ø28 ~ø194	-
Hollow bar	ø23 ~ø194	At least 7T or above

Standards		Chemical composition									Mechanical properties		
KS	Old code UNS NO.	Cu	Zn	Fe	Al	Mn	Sn	Pb	Ni	Si	Tensile strength N/mm ²	Elongation %	Hardness HB
CAC301	HBsC1	55.0 ~ 60.0	33.0 ~ 42.0	0.5 ~ 1.5	0.5 ~ 1.5	0.1 ~ 1.5	1.0	0.4	1.0	0.1	430 or above	20 or above	90 or above (10/1000)
CAC302	HBsC2	55.0 ~ 60.0	30.0 ~ 42.0	0.5 ~ 2.0	0.5 ~ 2.0	0.1 ~ 3.5	1.0	0.4	1.0	0.1	490 or above	18 or above	100 or above (10/1000)
CAC303	HBsC3	60.0 ~ 65.0	22.0 ~ 28.0	2.0 ~ 4.0	3.0 ~ 5.0	2.5 ~ 5.0	0.5	0.2	0.5	0.1	635 or above	15 or above	165 or above (10/3000)
CAC304	HBsC4	60.0 ~ 65.0	22.0 ~ 28.0	2.0 ~ 4.0	5.0 ~ 7.5	2.5 ~ 5.0	0.2	0.2	0.5	0.1	755 or above	12 or above	200 or above (10/3000)

Aluminum bronze

- High strength and toughness are high.
- Excellent resistance to bending, corrosion, heat, and abrasion in low temperature.
- Used in parts such as bearing, bush, gear, belt seat, plunger, paper-making roller, propeller for ship, nut, and safety tools.

Available type and dimension

Type	Dimension
Solid bar	ø40 ~ø194
Hollow bar	Inquire for available dimension

Standards		Chemical composition								Mechanical properties		
KS/JIS	Old code UNS NO.	Cu	Fe	Ni	Al	Mn	Sn	Pb	Zn	Tensile strength N/mm ²	Elongation %	Hardness HB
CAC701	AIBC1	85.0 ~ 90.0	1.0 ~ 3.0	0.1 ~ 1.0	8.0 ~ 10.0	0.1 ~ 1.0	0.1	0.1	0.5	440 or above	25 or above	80 (10/1000)
CAC702	AIBC2	80.0 ~ 88.0	2.5 ~ 5.0	1.0 ~ 3.0	8.0 ~ 10.5	0.1 ~ 1.5	0.1	0.1	0.5	490 or above	20 or above	120 (10/1000)
CAC703	AIBC3	78.0 ~ 85.0	3.0 ~ 6.0	3.0 ~ 6.0	8.5 ~ 10.5	0.1 ~ 1.5	0.1	0.1	0.5	590 or above	15 or above	120 (10/1000)

Brass

- Excellent hot forging and machinability.
- Used in parts such as bolt, nut, small screw, spindle, gear, valve, and mechanical parts.

Available type and dimension

Type	Dimension
Solid bar	ø28 ~ø194
Hollow bar	Min. ID 23, 7T or above

Standards	Chemical composition					Mechanical properties	
KS/JIS	Cu	Pb	Fe	Fe + Sn	Zn	Tensile strength N/mm ²	Elongation %
C3604	57.0 ~ 61.0	1.8 ~ 3.7	0.5	1.0	Rem	335	27
C3771	57.0 ~ 61.0	1.0 ~ 2.5	0.5	0.5	Rem	315	15



Technical Data

Bearing life and wear amount


Allowance of abrasion for oil-less bearing depends on its dimension and accuracy, which directly leads to its lifetime. Since abrasion amount can be changed due to other conditions such as speed, load, inflow of foreign substance, temperature, axis processing status, and tolerance, it is difficult to accurately anticipate the abrasion amount and life time without using it. Also, oil-less bearing is mostly used in complex and special conditions compared to ball and roller bearing, so it is difficult to anticipate the life time using calculation formula. However, the wear amount is estimated by the following formula.

W = K.P.V.T

W: Wear amount (mm) / V: Velocity (m/min) / P: Contact pressure (kgf/cm²)
T: Running time (hr) / K: Specific wear amount (mm/kgf/cm² · m/min·hr)



Specific wear amount K

Lubrication	mm/kgf/cm ² ·m/min·hr
Dry	1 X 10 ^{-3 ~ -5}
Boundary lubrication under low speed	1 X 10 ^{-5 ~ -7}
Periodic lubrication	1 X 10 ^{-6 ~ -8}
Continuous lubricaiton under water application	1 X 10 ^{-8 ~ -10}



PV Value

PV value is a value that has multiplied surface pressure per unit area P (kgf/cm², unit area for bearing is internal diameter x length) and speed per unit time V (m/min), which is used as important criteria for selecting bearing. Therefore, PV value should be calculated and selected as indicated below so that it does not exceed allowable PV value for each bearing. Calculation formula is indicated as below.

Bushing		P (Kgf/cm ²)	V (m/min)	PV (Kgf/cm ² · m/min)
	Radial journal rotation	$\frac{10^2 W}{\phi d \times L}$	$\frac{\pi \phi d n}{10^3}$	$\frac{\pi W n}{10 \times L}$
	Oscillation	$\frac{10^2 W}{\phi d \times L}$	$\frac{\pi \phi d c \theta}{180 \times 10^3}$	$\frac{\pi W c \theta}{18 \times 10^2 \times L}$
	Reciprocation	$\frac{10^2 W}{\phi d \times L}$	$\frac{2 c S}{10^3}$	$\frac{W c S}{5 \times \phi d \times L}$
Washer		P (Kgf/cm ²)	V (m/min)	PV (Kgf/cm ² · m/min)
	Thrust motion	Rotation $\frac{400 W}{\pi \times (\phi D^2 - \phi d^2)}$	Rotation $\frac{\pi \phi D n}{10^3}$	Rotation $\frac{4 W \phi D n}{10^3 \times (\phi D^2 - \phi d^2)}$
		Rotation $\frac{400 W}{\pi \times (\phi D^2 - \phi d^2)}$	Rotation $\frac{\pi \phi D \theta}{180 \times 10^3}$	Rotation $\frac{4 W \phi D c \theta}{180 \times 10^3 \times (\phi D^2 - \phi d^2)}$
Plate		P (Kgf/cm ²)	V (m/min)	PV (Kgf/cm ² · m/min)
	Reciprocation	$\frac{10^2 W}{B \times L}$	$\frac{2 c S}{10^3}$	$\frac{W c S}{5 \times B \times L}$

Inner diameter : φd mm / Outer diameter : ØD mm / Length : L mm / Width : B mm / Rotating speed : n rpm
Oscillating cycle : c cpm / Stroke distance : S mm / Oscillating angle : θ° / Load : W kgf

Effect of peridic greasing

Additioal lubrication with grease or oil can reduce friction heat and abrasion compared to dry lubrication status. Also, it can discharge worn particles abrasion and prevent foreign substance from flowing in (seal effect), and rust from occurring, which can improve bearing performance and life cycle. Also, if initial lubricant is applied on internal diameter where it requires no lubrication, it can reduce rapid initial wear amount that is occurred in starting and achieve soft operation effect.


Lubricant can be used effectively as below depending on the using condition.

Using condition	Lubricant
Low-load, High-speed	Spindle oil having low viscosity of < 8~17cst (30°C)
Medium-load, Medium-speed	Motor oil and turbine oil having viscosity of < 7~15cst (98.9°C)
High-load, Low-speed	Gear oil and cylinder oil having high viscosity of 100~1,000 cst (37°C) (Oil containing MoS ² is effective)

※ For using on high-load and resistance to abrasion and heat, grease containing molybdenum disulfide (MoS²) is most effective, which is recommended for improving performance and life cycle.


Oil impregnation method

When using solid lubricant dispersed bearing, Develon by purchasing the material and machining or grinding, be sure to apply oil impregnation. There are heating type and vacuum type in impregnation method. Heating method contains processed product in the container with lubricant (motor oil) and gradually heats to 100 ~ 110°C and keep the temperature 1 to 2 hours until bubble does not occur. Cut the heat source and let it cool down to the room temperature and takes products out of the bath. If oil impregnation by heating is not available, leave the products in the oil bath for 24 hours or more. Also, vacuum impregnation can be available on request.

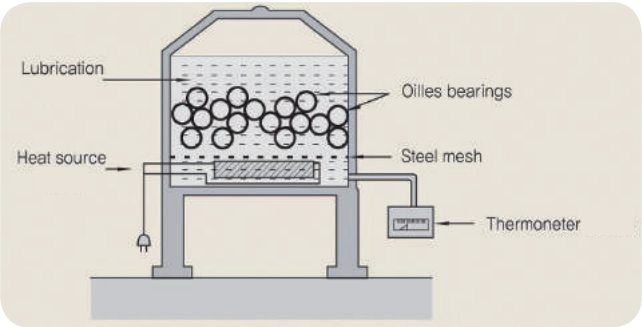


Design for oil groove and oil hole

- Oil groove** : Design can be applied evenly on the internal diameter surface based on the maximum load point. Length of oil groove should be 80 % more or less of bearing length. All edges should be chamfered. In case of injecting oil from outside of the housing, it is very effective to make the rotation groove on the housing internal diameter or bearing external diameter surface in order to avoid inadequate lubrication from clogged oil hole caused by shifting of the oil hole from the housing oil groove.
- Oil hole** : Normally, 1 oil hole is made to the direction where load is not applied. In case of rotational motion, 2 oil holes are made to both direction based on the maximum load point. Also, when bearing length is long, 2 oil holes are made to length direction.

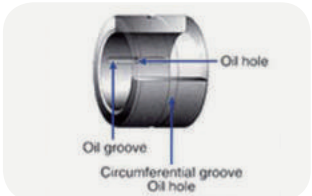

Oil hold and oil groove

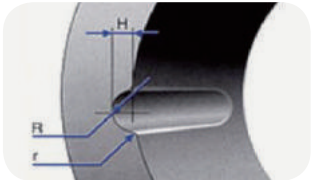

Cross sectional configuraton of oil groove

ID Item	R	r	H	Qt'y
30 or below	1.5	1.5	1.2	1 ~ 2
30 ~ 50	2	2	1.8	3
50 ~ 80	3	3	2.5	3
80 ~ 120	3.5	3.5	3.5	4
120 ~ 180	4	4	5	4
180 ~ 250	5	5	6	5
250 ~ 315	6	6	7	6
315 ~ 400	7	7	8	8
400 ~ 500	8	8	8	8

Technical Data

Bearing mounting



There are pressing fit and cooling fit for inserting the bearing into the housing.

Cooling fit

- Nitrogen and dry ice are used for cooling fit.
- Compared to pressing fit, it can achieve more accurate installation.
- Shrinkage fit can deteriorate the bearing function.

Pressing fit

- In general, mandrel and press machine are used for pressing the oil-less bearing into the housing.
- As indicated on the figure, oil-less bearing is pressed into the housing with jig (fixing device) by a small press.
- In case of pressing large product, chamfering should be made on the bearing external diameter and housing internal diameter first before using the oil.

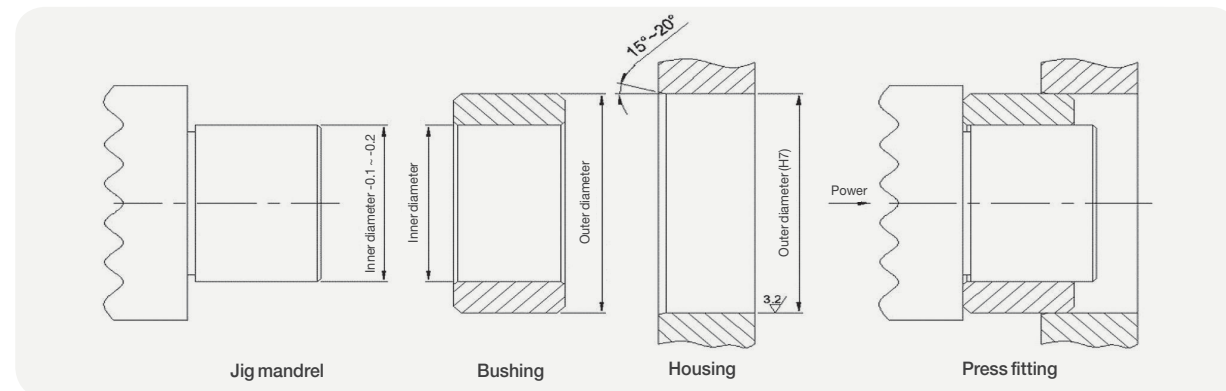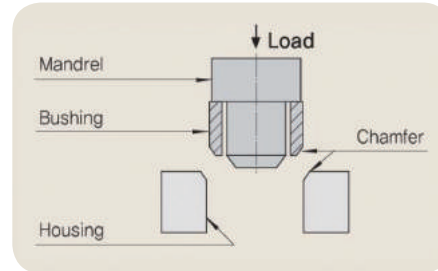

Caution

- Shaft should be ground (Ra0.8) in principle.
- Be sure to comply with the tolerance indicated on the dimension table of the catalog for the housing and shaft.
- Be sure to maintain bearing shaft horizontally so that it is not tilted to one side.
- Recommended to use the sealing to prevent foreign substance from flowing in.
- Hardening does not have to be applied on the shaft, but life cycle can be extended if it's chrome plated.

Calculation formula for shrinkage amount by cooling

Allowance of abrasion for oil-less bearing depends on its dimension and accuracy, which directly leads to its lifetime. Since abrasion amount can be changed due to other conditions such as speed, load, inflow of foreign substance, temperature, axis processing status, and tolerance, it is difficult to accurately anticipate the abrasion amount and life time without using it. Also, oil-less bearing is mostly used in complex and special conditions compared to ball and roller bearing, so it is difficult to anticipate the life time using calculation formula. However, the wear amount is estimated by the following formula.

$$\Delta D \approx D \times \alpha \times (T_0 - T_1)$$

D: Outer diameter of the bearing / **α** : Heat expansion coefficient of the bearing
 T_0 : Room temperature / **T_1** : Cooling temperature

Heat expansion coefficient

#500SP : $\alpha = 2.2 \times 10^{-5} / ^\circ\text{C}$

#500B : $\alpha = 1.8 \times 10^{-5} / ^\circ\text{C}$

#500F : $\alpha = 1.2 \times 10^{-5} / ^\circ\text{C}$

※ Refer to it for below diameter 500 mm

Ex) #500SP I.D 100 x O.D 130 x 100L
 Room temperature 20°C, Cooling temperature -70°C

$$\Rightarrow \Delta D \approx 130 \times 2.2 \times 0.00001 \times (20 - (-70)) = 0.2574$$

Frictional heat

Frictional heat Q generated per unit time and unit area is indicated as below.

$$Q = \mu \cdot P \cdot V / J \text{ (kcal/min)}$$

J: Frictional heat per unit motion ($\approx 427 \text{ kgf} \cdot \text{m/kcal}$) / **μ** : Frictional coefficient
P: Contact pressure (kgf/cm^2) / **V**: Velocity (m/min)

Frictional heat is mainly affected by speed rather than contact pressure. Therefore, for similar PV values, additional lubrication should be considered for a higher velocity application to prevent seizure to the bearing or the mating shaft.

Mating shaft

Item	Shaft Material	Hardness	Shaft roughness
General purpose	General structural steel with SM35C or above	Higher strength material is recommended, when foreign substance flows in	3~12 μ
High temperature	Stainless steel or chrome plating		
Corrosive environment	Rockwell "C" 35 or above		

- Reduce the shaft dimension to account for the heat expansion amount of the material when it is used on high temperature 100°C or above.

$$\text{Heat expansion amount} = \text{shaft heat expansion coefficient } (\alpha) \times \text{shaft diameter } (d) \times (\text{ambient temperature} - \text{room temperature})$$


Ex) #500SP $\alpha : 2.2 \times 10^{-5} / ^\circ\text{C}$

- 2 ~ 3 chrome plating is ideal for seawater and liquid medicine.
- Nitriding on shaft is effective in high pressure and low speed application.

Chamfering

It is ideal to chamfer the both ends of the oil-less bearing in order to prevent stress concentration.

ID Item	Chamfer
80 or below	0.5C
80 ~ 200	1.0C
200 ~ 300	1.5C
300 or below	2.0C

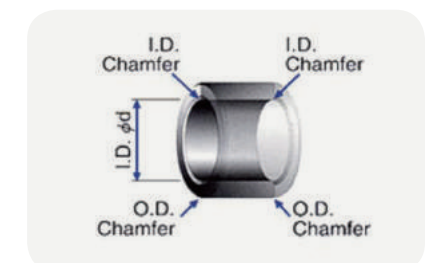

Calculation formula for appropriate thickness of the bearing

Thickness of standard bearing is calculated using the formula below.

$$T = (0.05 \sim 0.07) d + (2 \sim 5 \text{ mm})$$

Tolerances of Regularly Used Hole Fits

Size(mm)		D			E			F			G		H					
Over	below	D8	D9	D10	E7	E8	E9	F6	F7	F8	G6	G7	H5	H6	H7	H8	H9	H10
0	3	34.0	45.0	60.0	24.0	28.0	29.0	12.0	16.0	20.0	8.0	12.0	4.0	6.0	10.0	14.0	25.0	40.0
		20.0	20.0	20.0	14.0	14.0	14.0	6.0	6.0	6.0	6.0	6.0	0.0	0.0	0.0	0.0	0.0	0.0
3	6	48.0	60.0	78.0	32.0	38.0	50.0	18.0	22.0	28.0	12.0	16.0	5.0	8.0	12.0	18.0	30.0	48.0
		30.0	30.0	30.0	20.0	20.0	20.0	10.0	10.0	10.0	4.0	4.0	0.0	0.0	0.0	0.0	0.0	0.0
6	10	62.0	76.0	98.0	40.0	47.0	61.0	22.0	28.0	35.0	14.0	20.0	6.0	9.0	15.0	22.0	36.0	58.0
		40.0	40.0	40.0	25.0	25.0	25.0	13.0	13.0	13.0	5.0	5.0	0.0	0.0	0.0	0.0	0.0	0.0
10	14	77.0	93.0	120.0	50.0	59.0	75.0	27.0	34.0	43.0	17.0	24.0	8.0	11.0	18.0	27.0	43.0	70.0
		50.0	50.0	50.0	32.0	32.0	32.0	16.0	16.0	16.0	6.0	6.0	0.0	0.0	0.0	0.0	0.0	0.0
14	18	77.0	93.0	120.0	50.0	59.0	75.0	27.0	34.0	43.0	17.0	24.0	8.0	11.0	18.0	27.0	43.0	70.0
		50.0	50.0	50.0	32.0	32.0	32.0	16.0	16.0	16.0	6.0	6.0	0.0	0.0	0.0	0.0	0.0	0.0
18	24	98.0	117.0	149.0	61.0	73.0	92.0	33.0	41.0	53.0	20.0	28.0	9.0	13.0	21.0	33.0	52.0	84.0
		65.0	65.0	65.0	40.0	40.0	40.0	20.0	20.0	20.0	7.0	7.0	0.0	0.0	0.0	0.0	0.0	0.0
24	30	98.0	117.0	149.0	61.0	73.0	92.0	33.0	41.0	53.0	20.0	28.0	9.0	13.0	21.0	33.0	52.0	84.0
		65.0	65.0	65.0	40.0	40.0	40.0	20.0	20.0	20.0	7.0	7.0	0.0	0.0	0.0	0.0	0.0	0.0
30	40	119.0	142.0	180.0	75.0	89.0	112.0	41.0	50.0	64.0	25.0	34.0	11.0	16.0	25.0	39.0	62.0	100.0
		80.0	80.0	80.0	50.0	50.0	50.0	25.0	25.0	25.0	9.0	9.0	0.0	0.0	0.0	0.0	0.0	0.0
40	50	119.0	142.0	180.0	75.0	89.0	112.0	41.0	50.0	64.0	25.0	34.0	11.0	16.0	25.0	39.0	62.0	100.0
		80.0	80.0	80.0	50.0	50.0	50.0	25.0	25.0	25.0	9.0	9.0	0.0	0.0	0.0	0.0	0.0	0.0
50	65	146.0	174.0	220.0	90.0	106.0	134.0	49.0	60.0	76.0	29.0	40.0	13.0	19.0	30.0	46.0	74.0	120.0
		100.0	100.0	100.0	60.0	60.0	60.0	30.0	30.0	30.0	10.0	10.0	0.0	0.0	0.0	0.0	0.0	0.0
65	80	146.0	174.0	220.0	90.0	106.0	134.0	49.0	60.0	76.0	29.0	40.0	13.0	19.0	30.0	46.0	74.0	120.0
		100.0	100.0	100.0	60.0	60.0	60.0	30.0	30.0	30.0	10.0	10.0	0.0	0.0	0.0	0.0	0.0	0.0
80	100	174.0	207.0	260.0	107.0	126.0	156.0	58.0	71.0	90.0	34.0	47.0	15.0	22.0	35.0	54.0	87.0	140.0
		120.0	120.0	120.0	72.0	72.0	72.0	36.0	36.0	36.0	12.0	12.0	0.0	0.0	0.0	0.0	0.0	0.0
100	120	174.0	207.0	260.0	107.0	126.0	156.0	58.0	71.0	90.0	34.0	47.0	15.0	22.0	35.0	54.0	87.0	140.0
		120.0	120.0	120.0	72.0	72.0	72.0	36.0	36.0	36.0	12.0	12.0	0.0	0.0	0.0	0.0	0.0	0.0
120	140	208.0	245.0	305.0	125.0	148.0	185.0	68.0	83.0	106.0	39.0	54.0	18.0	25.0	40.0	63.0	100.0	160.0
		145.0	145.0	145.0	85.0	85.0	85.0	43.0	43.0	43.0	14.0	14.0	0.0	0.0	0.0	0.0	0.0	0.0
140	160	208.0	245.0	305.0	125.0	148.0	185.0	68.0	83.0	106.0	39.0	54.0	18.0	25.0	40.0	63.0	100.0	160.0
		145.0	145.0	145.0	85.0	85.0	85.0	43.0	43.0	43.0	14.0	14.0	0.0	0.0	0.0	0.0	0.0	0.0
160	180	208.0	245.0	305.0	125.0	148.0	185.0	68.0	83.0	106.0	39.0	54.0	18.0	25.0	40.0	63.0	100.0	160.0
		145.0	145.0	145.0	85.0	85.0	85.0	43.0	43.0	43.0	14.0	14.0	0.0	0.0	0.0	0.0	0.0	0.0
180	200	242.0	285.0	355.0	146.0	172.0	215.0	79.0	96.0	122.0	44.0	61.0	20.0	29.0	46.0	72.0	115.0	185.0
		170.0	170.0	170.0	100.0	100.0	100.0	50.0	50.0	50.0	15.0	15.0	0.0	0.0	0.0	0.0	0.0	0.0
200	225	242.0	285.0	355.0	146.0	172.0	215.0	79.0	96.0	122.0	44.0	61.0	20.0	29.0	46.0	72.0	115.0	185.0
		170.0	170.0	170.0	100.0	100.0	100.0	50.0	50.0	50.0	15.0	15.0	0.0	0.0	0.0	0.0	0.0	0.0
225	250	242.0	285.0	355.0	146.0	172.0	215.0	79.0	96.0	122.0	44.0	61.0	20.0	29.0	46.0	72.0	115.0	185.0
		170.0	170.0	170.0	100.0	100.0	100.0	50.0	50.0	50.0	15.0	15.0	0.0	0.0	0.0	0.0	0.0	0.0
250	280	271.0	320.0	400.0	162.0	191.0	240.0	88.0	108.0	137.0	49.0	69.0	23.0	32.0	52.0	81.0	130.0	210.0
		190.0	190.0	190.0	110.0	110.0	110.0	56.0	56.0	56.0	17.0	17.0	0.0	0.0	0.0	0.0	0.0	0.0
280	315	271.0	320.0	400.0	162.0	191.0	240.0	88.0	108.0	137.0	49.0	69.0	23.0	32.0	52.0	81.0	130.0	210.0
		190.0	190.0	190.0	110.0	110.0	110.0	56.0	56.0	56.0	17.0	17.0	0.0	0.0	0.0	0.0	0.0	0.0
315	355	299.0	350.0	440.0	182.0	214.0	265.0	98.0	119.0	151.0	54.0	79.0	25.0	36.0	57.0	89.0	140.0	230.0
		210.0	210.0	210.0	125.0	125.0	125.0	62.0	62.0	62.0	18.0	18.0	0.0	0.0	0.0	0.0	0.0	0.0
355	400	299.0	350.0	440.0	182.0	214.0	265.0	98.0	119.0	151.0	54.0	79.0	25.0	36.0	57.0	89.0	140.0	230.0
		210.0	210.0	210.0	125.0	125.0	125.0	62.0	62.0	62.0	18.0	18.0	0.0	0.0	0.0	0.0	0.0	0.0
400	450	327.0	385.0	480.0	198.0	232.0	290.0	108.0	131.0	165.0	60.0	83.0	27.0	40.0	63.0	97.0	155.0	250.0
		230.0	230.0	230.0	135.0	135.0	135.0	68.0	68.0	68.0	20.0	20.0	0.0	0.0	0.0	0.0	0.0	0.0
450	500	327.0	385.0	480.0	198.0	232.0	290.0	108.0	131.0	165.0	60.0	83.0	27.0	40.0	63.0	97.0	155.0	250.0
		230.0	230.0	230.0	135.0	135.0	135.0	68.0	68.0	68.0	20.0	20.0	0.0	0.0	0.0	0.0	0.0	0.0

Size(mm)		Js			K			M			N		P		R	S	T	U	X
Over	below	Js5	Js6	Js7	K5	K6	K7	M5	M6	M7	N6	N7	P6	P7	R7	S7	T7	U7	X7
0	3	2.0	3.0	5.0	0.0	0.0	0.0	-2.0	-2.0	-2.0	-4.0	-4.0	-6.0	-6.0	-10.0	-14.0	•	-18.0	-20.0
		-2.0	-3.0	-5.0	-4.0	-6.0	-10.0	-6.0	-8.0	-12.0	-10.0	-14.0	-12.0	-16.0	-20.0	-24.0	•	-28.0	-30.0
3	6	2.5	4.0	6.0	0.0	2.0	3.0	-3.0	-1.0	0.0	-5.0	-4.0	-9.0	-8.0	-11.0	-15.0	•	-19.0	-24.0
		-2.5	-4.0	-6.0	-5.0	-6.0	-9.0	-8.0	-9.0	-12.0	-13.0	-16.0	-17.0	-20.0	-23.0	-27.0	•	-31.0	-36.0
6	10	3.0	4.5	7.5	1.0	2.0	5.0	-4.0	-3.0	0.0	-7.0	-4.0	-12.0	-9.0	-13.0	-17.0	•	-22.0	-28.0
		-3.0	-4.5	-7.5	-5.0	-7.0	-10.0	-10.0	-12.0	-15.0	-16.0	-19.0	-21.0	-24.0	-28.0	-32.0	•	-37.0	-43.0
10	14	4.0	5.5	9.0	2.0	2.0	6.0	6.0	-4.0	0.0	-9.0	15.0	-15.0	-11.0	-16.0	-21.0	•	-26.0	-33.0
		-4.0	-5.5	-9.0	-6.0	-9.0	-9.0	-12.0	-15.0	-18.0	-20.0	-23.0	-26.0	-29.0	-34.0	-39.0	•	-44.0	-51.0
14	18	4.0	5.5	9.0	2.0	2.0	6.0	6.0	-4.0	0.0	-9.0	15.0	-15.0	-11.0	-16.0	-21.0	•	-26.0	-38.0
		-4.0	-5.5	-9.0	-6.0	-9.0	-9.0	-12.0	-15.0	-18.0	-20.0	-23.0	-26.0	-29.0	-34.0	-39.0	•	-44.0	-56.0
18	24	4.5	6.5	10.5	1.0	2.0	6.0	-5.0	-4.0	0.0	-11.0	-7.0	-18.0	-14.0	-20.0	-27.0	•	-33.0	-46.0
		-4.5	-6.5	-10.5	-8.0	-11.0	-15.0	-14.0	-17.0	-21.0	-24.0	-28.0	-31.0	-35.0	-41.0	-48.0	•	-54.0	-67.0
24	30	4.5	6.5	10.5	1.0	2.0	6.0	-5.0	-4.0	0.0	-11.0	-7.0	-18.0	-14.0	-20.0	-27.0	-33.0	-40.0	-56.0
		-4.5	-6.5	-10.5	-8.0	-11.0	-15.0	-14.0	-17.0	-21.0	-24.0	-28.0	-31.0	-35.0	-41.0	-48.0	-54.0	-61.0	-77.0
30	40	5.5	8.0	12.5	2.0	3.0	7.0	-5.0	-4.0	0.0	-12.0	-8.0	-21.0	-17.0	-25.0	-34.0	-39.0	-51.0	•
		-5.5	-8.0	-12.5	-9.0	-13.0	-18.0	-16.0	-20.0	-25.0	-28.0	-33.0	-37.0	-42.0	-50.0	-59.0	-64.0	-76.0	•
40	50	5.5	8.0	12.5	2.0	3.0	7.0	-5.0	-4.0	0.0	-12.0	-8.0	-21.0	-17.0	-25.0	-34.0	-45.0	-61.0	•
		-5.5	-8.0	-12.5	-9.0	-13.0	-18.0	-16.0	-20.0	-25.0	-28.0	-33.0	-37.0	-42.0	-50.0	-59.0	-70.0	-86.0	•
50	65	6.5	9.5	15.0	3.0	4.0	9.0	-6.0	-5.0	0.0	-14.0	-9.0	-26.0	-21.0	-30.0	-42.0	-55.0	-76.0	•
		-6.5	-9.5	-15.0	-10.0	-15.0	-21.0	-19.0	-24.0	-30.0	-33.0	-39.0	-45.0	-51.0	-60.0	-72.0	-85.0	-106.0	•
65	80	6.5	9.5	15.0	3.0	4.0	9.0	-6.0	-5.0	0.0	-14.0	-9.0	-26.0	-21.0	-32.0	-48.0	-64.0	-91.0	•
		-6.5	-9.5	-15.0	-10.0	-15.0	-21.0	-19.0	-24.0	-30.0	-33.0	-39.0	-45.0	-51.0	-62.0	-78.0	-94.0	-121.0	•
80	100	7.5	11.0	17.5	2.0	4.0	10.0	-8.0	-6.0	0.0	-16.0	-10.0	-30.0	-24.0	-38.0	-58.0	-78.0	-111.0	•
		-7.5	-11.0	-17.5	-13.0	-18.0	-25.0	-23.0	-28.0	-35.0	-38.0	-45.0	-52.0	-59.0	-73.0	-93.0	-113.0	-146.0	•
100	120	7.5	11.0	17.5	2.0	4.0	10.0	-8.0	-6.0	0.0	-16.0	-10.0	-30.0	-24.0	-41.0	-66.0	-91.0	-131.0	•
		-7.5	-11.0	-17.5	-13.0	-18.0	-25.0	-23.0	-28.0	-35.0	-38.0	-45.0	-52.0	-59.0	-76.0	-101.0	-126.0	-166.0	•
120	140	9.0	12.5	20.0	3.0	4.0	12.0	-9.0	-8.0	0.0	-20.0	-12.0	-36.0	-28.0	-48.0	-77.0	-107.0	•	•
		-9.0	-12.5	-20.0	-15.0	-21.0	-28.0	-27.0	-33.0	-40.0	-45.0	-52.0	-61.0	-68.0	-88.0	-117.0	-147.0	•	•
140	160	9.0	12.5	20.0	3.0	4.0	12.0	-9.0	-8.0	0.0	-20.0	-12.0	-36.0	-28.0	-50.0	-85.0	-119.0	•	•
		-9.0	-12.5	-20.0	-15.0	-21.0	-28.0	-27.0	-33.0	-40.0	-45.0	-52.0	-61.0	-68.0	-90.0	-125.0	-159.0	•	•
160	180	9.0	12.5	20.0	3.0	4.0	12.0	-9.0	-8.0	0.0	-20.0	-12.0	-36.0	-28.0	-53.0	-93.0	-131.0	•	•
		-9.0	-12.5	-20.0	-15.0	-21.0	-28.0	-27.0	-33.0	-40.0	-45.0	-52.0	-61.0	-68.0	-93.0	-133.0	-171.0	•	•
180	200	10.0	14.5	23.0	2.0	5.0	13.0	-11.0	-8.0	0.0	-22.0	-14.0	-41.0	-33.0	-60.0	-105.0	•	•	•
		-10.0	-14.5	-23.0	-18.0	-24.0	-33.0	-31.0	-37.0	-46.0	-51.0	-60.0	-70.0	-79.0	-106.0	-151.0	•	•	•
200	225	10.0	14.5	23.0	2.0	5.0	13.0	-11.0	-8.0	0.0	-22.0	-14.0	-41.0	-33.0	-63.0	-113.0	•	•	•
		-10.0	-14.5	-23.0	-18.0	-24.0	-33.0	-31.0	-37.0	-46.0	-51.0	-60.0	-70.0	-79.0	-109.0	-159.0	•	•	•
225	250	10.0	14.5	23.0	2.0	5.0	13.0	-11.0	-8.0	0.0	-22.0	-14.0	-41.0	-33.0	-67.0	-123.0	•	•	•
		-10.0	-14.5	-23.0	-18.0	-24.0	-33.0	-31.0	-37.0	-46.0	-51.0	-60.0	-70.0	-79.0	-113.0	-169.0	•	•	•
250	280	11.5	16.0	26.0	3.0	5.0	16.0	-13.0	-9.0	0.0	-25.0	-14.0	-47.0	-36.0	-74.0	•	•	•	•
		-11.5	-16.0	-26.0	-20.0	-27.0	-36.0	-36.0	-41.0	-52.0	-57.0	-66.0	-79.0	-88.0	-126.0	•	•	•	•
280	315	11.5	16.0	26.0	3.0	5.0	16.0	-13.0	-9.0	0.0	-25.0	-14.0	-47.0	-36.0	-78.0	•	•	•	•
		-11.5	-16.0	-26.0	-20.0	-27.0	-36.0	-36.0	-41.0	-52.0	-57.0	-66.0	-79.0	-88.0	-130.0	•	•	•	•
315	355	12.5	18.0	28.5	3.0	7.0	17.0	-14.0	-10.0	0.0	-26.0	-16.0	-51.0	-41.0	-87.0	•	•	•	•
		-12.5	-18.0	-28.5	-22.0	-29.0	-40.0	-39.0	-46.0	-57.0	-62.0	-73.0	-81.0	-98.0	-144.0	•	•	•	•
355	400	12.5	18.0	28.5	3.0	7.0	17.0	-14.0	-10.0	0.0	-26.0	-16.0	-51.0	-41.0	-93.0	•	•	•	•
		-12.5	-18.0	-28.5	-22.0	-29.0	-40.0	-39.0	-46.0	-57.0	-62.0	-73.0	-81.0	-98.0	-150.0	•	•	•	•
400	450	13.5	20.0	31.5	2.0	8.0	18.0	-16.0	-10.0	0.0	-27.0	-17.0	-55.0	-45.0	-103.0	•	•	•	•
		-13.5	-20.0	-31.5	-25.0	-32.0	-45.0	-43.0	-50.0	-63.0	-67.0	-80.0	-95.0	-100.0	-166.0	•	•	•	•
450	500	13.5	20.0	31.5	2.0	8.0	18.0	-16.0	-10.0	0.0	-27.0	-17.0	-55.0	-45.0	-109.0	•	•	•	•
		-13.5	-20.0	-31.5	-25.0	-32.0	-45.0	-43.0	-50.0	-63.0	-67.0	-80.0	-95.0	-100.0	-172.0	•	•	•	•

Tolerances of Regularly Used Shaft Fits

Size(mm)		b		c		d		e			f			g			h			
Over	below	b9	c9	d8	d9	e7	e8	e9	f6	f7	f8	g4	g5	g6	h4	h5	h6	h7		
0	3	-140.0	-60.0	-20.0	-20.0	-14.0	-14.0	-14.0	-6.0	-6.0	-6.0	-2.0	-2.0	-2.0	0.0	0.0	0.0	0.0		
		-165.0	-85.0	-34.0	-45.0	-24.0	-28.0	-29.0	-12.0	-16.0	-20.0	-5.0	-6.0	-8.0	-3.0	-4.0	-6.0	-10.0		
3	6	-140.0	-70.0	-30.0	-30.0	-20.0	-20.0	-20.0	-10.0	-10.0	-10.0	-4.0	-4.0	-4.0	0.0	0.0	0.0	0.0		
		-170.0	-100.0	-48.0	-60.0	-32.0	-38.0	-50.0	-18.0	-22.0	-28.0	-8.0	-9.0	-12.0	-4.0	-5.0	-8.0	-12.0		
6	10	-150.0	-80.0	-40.0	-40.0	-25.0	-25.0	-25.0	-13.0	-13.0	-13.0	-5.0	-5.0	-5.0	0.0	0.0	0.0	0.0		
		-186.0	-116.0	-62.0	-76.0	-40.0	-47.0	-61.0	-22.0	-28.0	-35.0	-9.0	-11.0	-14.0	-4.0	-6.0	-9.0	-15.0		
10	14	-150.0	-95.0	-50.0	-50.0	-32.0	-32.0	-32.0	-16.0	-16.0	-16.0	-6.0	-6.0	-6.0	0.0	0.0	0.0	0.0		
		-193.0	-138.0	-77.0	-93.0	-50.0	-59.0	-75.0	-27.0	-34.0	-43.0	-11.0	-14.0	-17.0	-5.0	-8.0	-11.0	-18.0		
14	18	-150.0	-95.0	-50.0	-50.0	-32.0	-32.0	-32.0	-16.0	-16.0	-16.0	-6.0	-6.0	-6.0	0.0	0.0	0.0	0.0		
		-193.0	-138.0	-77.0	-93.0	-50.0	-59.0	-75.0	-27.0	-34.0	-43.0	-11.0	-14.0	-17.0	-5.0	-8.0	-11.0	-18.0		
18	24	-160.0	-110.0	-65.0	-65.0	-40.0	-40.0	-40.0	-20.0	-20.0	-20.0	-7.0	-7.0	-7.0	0.0	0.0	0.0	0.0		
		-212.0	-162.0	-98.0	-117.0	-61.0	-73.0	-93.0	-33.0	-41.0	-53.0	-13.0	-16.0	-20.0	-6.0	-9.0	-13.0	-21.0		
24	30	-160.0	-110.0	-65.0	-65.0	-40.0	-40.0	-40.0	-20.0	-20.0	-20.0	-7.0	-7.0	-7.0	0.0	0.0	0.0	0.0		
		-212.0	-162.0	-98.0	-117.0	-61.0	-73.0	-93.0	-33.0	-41.0	-53.0	-13.0	-16.0	-20.0	-6.0	-9.0	-13.0	-21.0		
30	40	-170.0	-120.0	-80.0	-80.0	-50.0	-50.0	-50.0	-25.0	-25.0	-25.0	-9.0	-9.0	-9.0	0.0	0.0	0.0	0.0		
		-232.0	-182.0	-119.0	-142.0	-75.0	-89.0	-112.0	-41.0	-50.0	-64.0	-16.0	-20.0	-25.0	-7.0	-11.0	-16.0	-25.0		
40	50	-180.0	-130.0	-80.0	-80.0	-50.0	-50.0	-50.0	-25.0	-25.0	-25.0	-9.0	-9.0	-9.0	0.0	0.0	0.0	0.0		
		-242.0	-192.0	-119.0	-142.0	-75.0	-89.0	-112.0	-41.0	-50.0	-64.0	-16.0	-20.0	-25.0	-7.0	-11.0	-16.0	-25.0		
50	65	-190.0	-140.0	-100.0	-100.0	-60.0	-60.0	-60.0	-30.0	-30.0	-30.0	-10.0	-10.0	-10.0	0.0	0.0	0.0	0.0		
		-264.0	-214.0	-146.0	-174.0	-90.0	-106.0	-134.0	-49.0	-60.0	-76.0	-18.0	-23.0	-29.0	-8.0	-13.0	-19.0	-30.0		
65	80	-200.0	-150.0	-100.0	-100.0	-60.0	-60.0	-60.0	-30.0	-30.0	-30.0	-10.0	-10.0	-10.0	0.0	0.0	0.0	0.0		
		-274.0	-224.0	-146.0	-174.0	-90.0	-106.0	-134.0	-49.0	-60.0	-76.0	-18.0	-23.0	-29.0	-8.0	-13.0	-19.0	-30.0		
80	100	-220.0	-170.0	-120.0	-120.0	-72.0	-72.0	-72.0	-36.0	-36.0	-36.0	-12.0	-12.0	-12.0	0.0	0.0	0.0	0.0		
		-307.0	-257.0	-174.0	-207.0	-107.0	-126.0	-159.0	-58.0	-71.0	-90.0	-22.0	-27.0	-34.0	-10.0	-15.0	-22.0	-35.0		
100	120	-240.0	-180.0	-120.0	-120.0	-72.0	-72.0	-72.0	-36.0	-36.0	-36.0	-12.0	-12.0	-12.0	0.0	0.0	0.0	0.0		
		-327.0	-267.0	-174.0	-207.0	-107.0	-126.0	-159.0	-58.0	-71.0	-90.0	-22.0	-27.0	-34.0	-10.0	-15.0	-22.0	-35.0		
120	140	-260.0	-200.0	-145.0	-145.0	-85.0	-85.0	-85.0	-43.0	-43.0	-43.0	-14.0	-14.0	-14.0	0.0	0.0	0.0	0.0		
		-360.0	-300.0	-208.0	-245.0	-125.0	-148.0	-185.0	-68.0	-83.0	-106.0	-26.0	-32.0	-39.0	-12.0	-18.0	-25.0	-40.0		
140	160	-280.0	-210.0	-145.0	-145.0	-85.0	-85.0	-85.0	-43.0	-43.0	-43.0	-14.0	-14.0	-14.0	0.0	0.0	0.0	0.0		
		-380.0	-310.0	-208.0	-245.0	-125.0	-148.0	-185.0	-68.0	-83.0	-106.0	-26.0	-32.0	-39.0	-12.0	-18.0	-25.0	-40.0		
160	180	-310.0	-230.0	-145.0	-145.0	-85.0	-85.0	-85.0	-43.0	-43.0	-43.0	-14.0	-14.0	-14.0	0.0	0.0	0.0	0.0		
		-410.0	-330.0	-208.0	-245.0	-125.0	-148.0	-185.0	-68.0	-83.0	-106.0	-26.0	-32.0	-39.0	-12.0	-18.0	-25.0	-40.0		
180	200	-340.0	-240.0	-170.0	-170.0	-100.0	-100.0	-100.0	-50.0	-50.0	-50.0	-15.0	-15.0	-15.0	0.0	0.0	0.0	0.0		
		-455.0	-355.0	-242.0	-285.0	-146.0	-172.0	-215.0	-79.0	-96.0	-122.0	-29.0	-35.0	-44.0	-14.0	-20.0	-29.0	-46.0		
200	225	-380.0	-260.0	-170.0	-170.0	-100.0	-100.0	-100.0	-50.0	-50.0	-50.0	-15.0	-15.0	-15.0	0.0	0.0	0.0	0.0		
		-495.0	-375.0	-242.0	-285.0	-146.0	-172.0	-215.0	-79.0	-96.0	-122.0	-29.0	-35.0	-44.0	-14.0	-20.0	-29.0	-46.0		
225	250	-440.0	-280.0	-170.0	-170.0	-100.0	-100.0	-100.0	-50.0	-50.0	-50.0	-15.0	-15.0	-15.0	0.0	0.0	0.0	0.0		
		-535.0	-395.0	-242.0	-285.0	-146.0	-172.0	-215.0	-79.0	-96.0	-122.0	-29.0	-35.0	-44.0	-14.0	-20.0	-29.0	-46.0		
250	280	-480.0	-300.0	-190.0	-190.0	-110.0	-110.0	-110.0	-56.0	-56.0	-56.0	-17.0	-17.0	-17.0	0.0	0.0	0.0	0.0		
		-610.0	-430.0	-271.0	-320.0	-162.0	-191.0	-240.0	-88.0	-108.0	-132.0	-33.0	-40.0	-49.0	-16.0	-23.0	-32.0	-52.0		
280	315	-540.0	-330.0	-190.0	-190.0	-110.0	-110.0	-110.0	-56.0	-56.0	-56.0	-17.0	-17.0	-17.0	0.0	0.0	0.0	0.0		
		-670.0	-460.0	-271.0	-320.0	-162.0	-191.0	-240.0	-88.0	-108.0	-132.0	-33.0	-40.0	-49.0	-16.0	-23.0	-32.0	-52.0		
315	355	-600.0	-360.0	-210.0	-210.0	-125.0	-125.0	-125.0	-62.0	-62.0	-62.0	-18.0	-18.0	-18.0	0.0	0.0	0.0	0.0		
		-740.0	-500.0	-299.0	-350.0	-182.0	-214.0	-265.0	-98.0	-119.0	-151.0	-36.0	-43.0	-54.0	-18.0	-25.0	-36.0	-57.0		
355	400	-680.0	-400.0	-210.0	-210.0	-125.0	-125.0	-125.0	-62.0	-62.0	-62.0	-18.0	-18.0	-18.0	0.0	0.0	0.0	0.0		
		-820.0	-540.0	-299.0	-350.0	-182.0	-214.0	-265.0	-98.0	-119.0	-151.0	-36.0	-43.0	-54.0	-18.0	-25.0	-36.0	-57.0		
400	450	-760.0	-440.0	-230.0	-230.0	-135.0	-135.0	-135.0	-68.0	-68.0	-68.0	-20.0	-20.0	-20.0	0.0	0.0	0.0	0.0		
		-915.0	-595.0	-327.0	-385.0	-198.0	-232.0	-290.0	-108.0	-131.0	-165.0	-40.0	-47.0	-60.0	-20.0	-27.0	-40.0	-63.0		
450	500	-840.0	-480.0	-230.0	-230.0	-135.0	-135.0	-135.0	-68.0	-68.0	-68.0	-20.0	-20.0	-20.0	0.0	0.0	0.0	0.0		
		-995.0	-635.0	-327.0	-385.0	-198.0	-232.0	-290.0	-108.0	-131.0	-165.0	-40.0	-47.0	-60.0	-20.0	-27.0	-40.0	-63.0		

Size(mm)		h		js				k			m			n	p	r	s	t	u	x
Over	below	h8	h9	js4	js5	js6	js7	k4	k5	k6	m4	m5	m6	n6	p6	r6	s6	t6	u6	x6
0	3	0.0	0.0	1.5	2.0	3.0	5.0	3.0	4.0	6.0	5.0	6.0	8.0	10.0	12.0	16.0	20.0	•	24.0	26.0
		-14.0	-25.0	-1.5	-2.0	-3.0	-5.0	0.0	0.0	0.0	2.0	2.0	2.0	4.0	6.0	10.0	14.0	•	18.0	20.0
3	6	0.0	0.0	2.0	2.5	4.0	6.0	5.0	6.0	9.0	8.0	9.0	12.0	16.0	20.0	23.0	27.0	•	31.0	36.0
		-18.0	-30.0	-2.0	-2.5	-4.0	-6.0	1.0	1.0	1.0	4.0	4.0	4.0	8.0	12.0	15.0	19.0	•	23.0	28.0
6	10	0.0	0.0	2.0	3.0	4.5	7.5	6.0	7.0	10.0	10.0	12.0	15.0	19.0	24.0	28.0	32.0	•	37.0	43.0
		-22.0	-36.0	-2.0	-3.0	-4.5	-7.5	1.0	1.0	1.0	6.0	6.0	6.0	10.0	15.0	19.0	23.0	•	28.0	34.0
10	14	0.0	0.0	2.5	4.0	5.5	9.0	6.0	9.0	12.0	12.0	15.0	18.0	23.0	29.0	34.0	39.0	•	44.0	51.0
		-27.0	-43.0	-2.5	-4.0	-5.5	-9.0	1.0	1.0	1.0	7.0	7.0	7.0	12.0	18.0	23.0	28.0	•	33.0	40.0
14	18	0.0	0.0	2.5	4.0	5.5	9.0	6.0	9.0	12.0	12.0	15.0	18.0	23.0	29.0	34.0	39.0	•	44.0	56.0
		-27.0	-43.0	-2.5	-4.0	-5.5	-9.0	1.0	1.0	1.0	7.0	7.0	7.0	12.0	18.0	23.0	28.0	•	33.0	45.0
18	24	0.0	0.0	3.0	4.5	6.5	10.5	8.0	11.0	15.0	14.0	17.0	21.0	28.0	35.0	41.0	48.0	•	54.0	67.0
		-33.0	-52.0	-3.0	-4.5	-6.5	-10.5	2.0	2.0	2.0	8.0	8.0	8.0	15.0	22.0	28.0	35.0	•	41.0	54.0
24	30	0.0	0.0	3.0	4.5	6.5	10.5	8.0	11.0	15.0	14.0	17.0	21.0	28.0	35.0	41.0	48.0	54.0	61.0	77.0
		-33.0	-52.0	-3.0	-4.5	-6.5	-10.5	2.0	2.0	2.0	8.0	8.0	8.0	15.0	22.0	28.0	35.0	41.0	48.0	64.0
30	40	0.0	0.0	3.5	5.5	8.0	12.5	9.0	13.0	18.0	16.0	20.0	25.0	33.0	42.0	50.0	59.0	64.0	75.0	•
		-39.0	-62.0	-3.5	-5.5	-8.0	-12.5	2.0	2.0	2.0	9.0	9.0	9.0	17.0	26.0	34.0	43.0	48.0	60.0	•
40	50	0.0	0.0	3.5	5.5	8.0	12.5	9.0	13.0	18.0	16.0	20.0	25.0	33.0	42.0	50.0	59.0	70.0	86.0	•
		-39.0	-62.0	-3.5	-5.5	-8.0	-12.5	2.0	2.0	2.0	9.0	9.0	9.0	17.0	26.0	34.0	43.0	54.0	70.0	•
50	65	0.0	0.0	4.0	6.5	9.5	15.0	10.0	15.0	21.0	19.0	24.0	30.0	39.0	51.0	60.0	72.0	85.0	106.0	•
		-46.0	-74.0	-4.0	-6.5	-9.5	-15.0	2.0	2.0	2.0	11.0	11.0	11.0	20.0	32.0	41.0	53.0	66.0	87.0	•
65	80	0.0	0.0	4.0	6.5	9.5	15.0	10.0	15.0	21.0	19.0	24.0	30.0	39.0	51.0	62.0	78.0	94.0	121.0	•
		-46.0	-74.0	-4.0	-6.5	-9.5	-15.0	2.0	2.0	2.0	11.0	11.0	11.0	20.0	32.0	43.0	59.0	75.0	102.0	•
80	100	0.0	0.0	5.0	7.5	11.0	17.5	13.0	18.0	25.0	23.0	28.0	35.0	45.0	59.0	73.0	93.0	113.0	146.0	•
		-54.0	-87.0	-5.0	-7.5	-11.0	-17.5	3.0	3.0	3.0	13.0	13.0	13.0	23.0	37.0	51.0	71.0	91.0	124.0	•
100	120	0.0	0.0	5.0	7.5	11.0	17.5	13.0	18.0	25.0	23.0	28.0	35.0	45.0	59.0	76.0	101.0	126.0	166.0	•
		-54.0	-87.0	-5.0	-7.5	-11.0	-17.5	3.0	3.0	3.0	13.0	13.0	13.0	23.0	37.0	54.0	79.0	104.0	144.0	•
120	140	0.0	0.0	6.0	9.0	12.5	20.0	15.0	21.0	28.0	27.0	33.0	40.0	52.0	68.0	88.0	117.0	147.0	•	•
		-63.0	-100.0	-6.0	-9.0	-12.5	-20.0	3.0	3.0	3.0	15.0	15.0	15.0	27.0	43.0	63.0	92.0	122.0	•	•
140	160	0.0	0.0	6.0	9.0	12.5	20.0	15.0	21.0	28.0	27.0	33.0	40.0	52.0	68.0	90.0	125.0	159.0	•	•
		-63.0	-100.0	-6.0	-9.0	-12.5	-20.0	3.0	3.0	3.0	15.0	15.0	15.0	27.0	43.0	65.0	100.0	134.0	•	•
160	180	0.0	0.0	6.0	9.0	12.5	20.0	15.0	21.0	28.0	27.0	33.0	40.0	52.0	68.0	93.0	133.0	171.0	•	•
		-63.0	-100.0	-6.0	-9.0	-12.5	-20.0	3.0	3.0	3.0	15.0	15.0	15.0	27.0	43.0	68.0	108.0	146.0	•	•
180	200	0.0	0.0	7.0	10.0	14.5	23.0	18.0	24.0	33.0	31.0	37.0	46.0	60.0	79.0	106.0	151.0	•	•	•
		-72.0	-115.0	-7.0	-10.0	-14.5	-23.0	4.0	4.0	4.0	17.0	17.0	17.0	31.0	50.0	77.0	122.0	•	•	•
200	225	0.0	0.0	7.0	10.0	14.5	23.0	18.0	24.0	33.0	31.0	37.0	46.0	60.0	79.0	109.0	159.0	•	•	•
		-72.0	-115.0	-7.0	-10.0	-14.5	-23.0	4.0	4.0	4.0	17.0	17.0	17.0	31.0	50.0	80.0	130.0	•	•	•
225	250	0.0	0.0	7.0	10.0	14.5	23.0	18.0	24.0	33.0	31.0	37.0	46.0	60.0	79.0	113.0	169.0	•	•	•
		-72.0	-115.0	-7.0	-10.0	-14.5	-23.0	4.0	4.0	4.0	17.0	17.0	17.0	31.0	50.0	84.0	140.0	•	•	•
250	280	0.0	0.0	8.0	11.5	16.0	26.0	20.0	27.0	36.0	36.0	43.0	52.0	66.0	88.0	125.0	•	•	•	•
		-81.0	-130.0	-8.0	-11.5	-16.0	-26.0	4.0	4.0	4.0	20.0	20.0	20.0	34.0	56.0	94.0	•	•	•	•
280	315	0.0	0.0	8.0	11.5	16.0	26.0	20.0	27.0	36.0	36.0	43.0	52.0	66.0	88.0	130.0	•	•	•	•
		-81.0	-130.0	-8.0	-11.5	-16.0	-26.0	4.0	4.0	4.0	20.0	20.0	20.0	34.0	56.0	98.0	•	•	•	•
315	355	0.0	0.0	9.0	12.5	18.0	28.5	22.0	29.0	40.0	39.0	46.0	57.0	73.0	98.0	144.0	•	•	•	•
		-89.0	-140.0	-9.0	-12.5	-18.0	-28.5	4.0	4.0	4.0	21.0	21.0	21.0	37.0	62.0	108.0	•	•	•	•
355	400	0.0	0.0	9.0	12.5	18.0	28.5	22.0	29.0	40.0	39.0	46.0	57.0	73.0	98.0	150.0	•	•	•	•
		-89.0	-140.0	-9.0	-12.5	-18.0	-28.5	4.0	4.0	4.0	21.0	21.0	21.0	37.0	62.0	114.0	•	•	•	•
400	450	0.0	0.0	10.0	13.5	20.0	31.5	25.0	32.0	45.0	43.0	50.0	63.0	80.0	108.0	166.0	•	•	•	•
		-97.0	-155.0	-10.0	-13.5	-20.0	-31.5	5.0	5.0	5.0	23.0	23.0	23.0	40.0	68.0	126.0	•	•	•	•
450	500	0.0	0.0	10.0	13.5	20.0	31.5	25.0	32.0	45.0	43.0	50.0	63.0	80.0	108.0	172.0	•	•	•	•
		-97.0	-155.0	-10.0	-13.5	-20.0	-31.5	5.0	5.0	5.0	23.0	23.0	23.0	40.0	68.0	132.0	•	•	•	•

Application

Plastic Injection Molding Machines




Power Plants



Press Dies and Molds



Construction Machinery

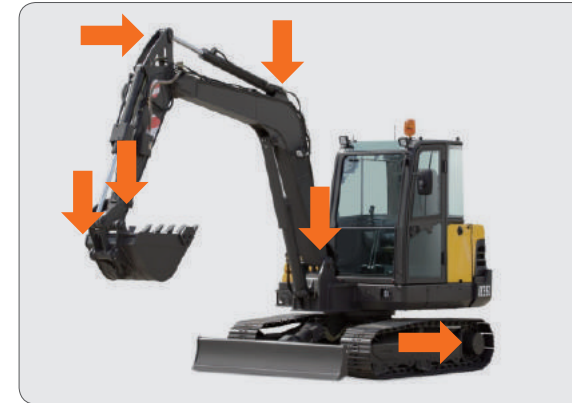

Hydraulic Press Machines



Steel Production Facilities

