

CJC™ Oil Filtration for the

Marine sector

Removal of particles, water, acidity and oil degradation products from hydraulic fluids, lubrication oils, diesel fuel and EAL/biodegradable oils



Reliable machinery
performance starts
with clean & dry oil



Do not change oil - clean it!

FACT: The condition of oil will determine uptime and life of machinery!

C.C.JENSEN

Cleaning oil for more than 60 years.

Oil can be cleaned:

Most people change oil not because the properties of the oil are lost, but because the oil is dirty!


Oil can be cleaned and kept clean - while in operation!


What do we do differently than other filtration systems?

- Offline oil filtration technology - is non-system critical
- We clean oil, tanks, and systems while they are in operation
- The highest dirt holding capacity in the industry (4 kg dirt per Filter Insert)
- We remove particles, water, varnish and acidity
- Our filter inserts are produced of 100% natural cellulose fibers from sustainable resources

Have you ever experienced..?

- Malfunction of hatch covers?
 - Non-operational cranes?
 - Excess water content in thrusters?
 - Excessive wear in reduction gears?
 - Extraordinary overhaul on fuel pumps and injection nozzles?
- all can be avoided by installing CJC™ Oil Filtration systems!

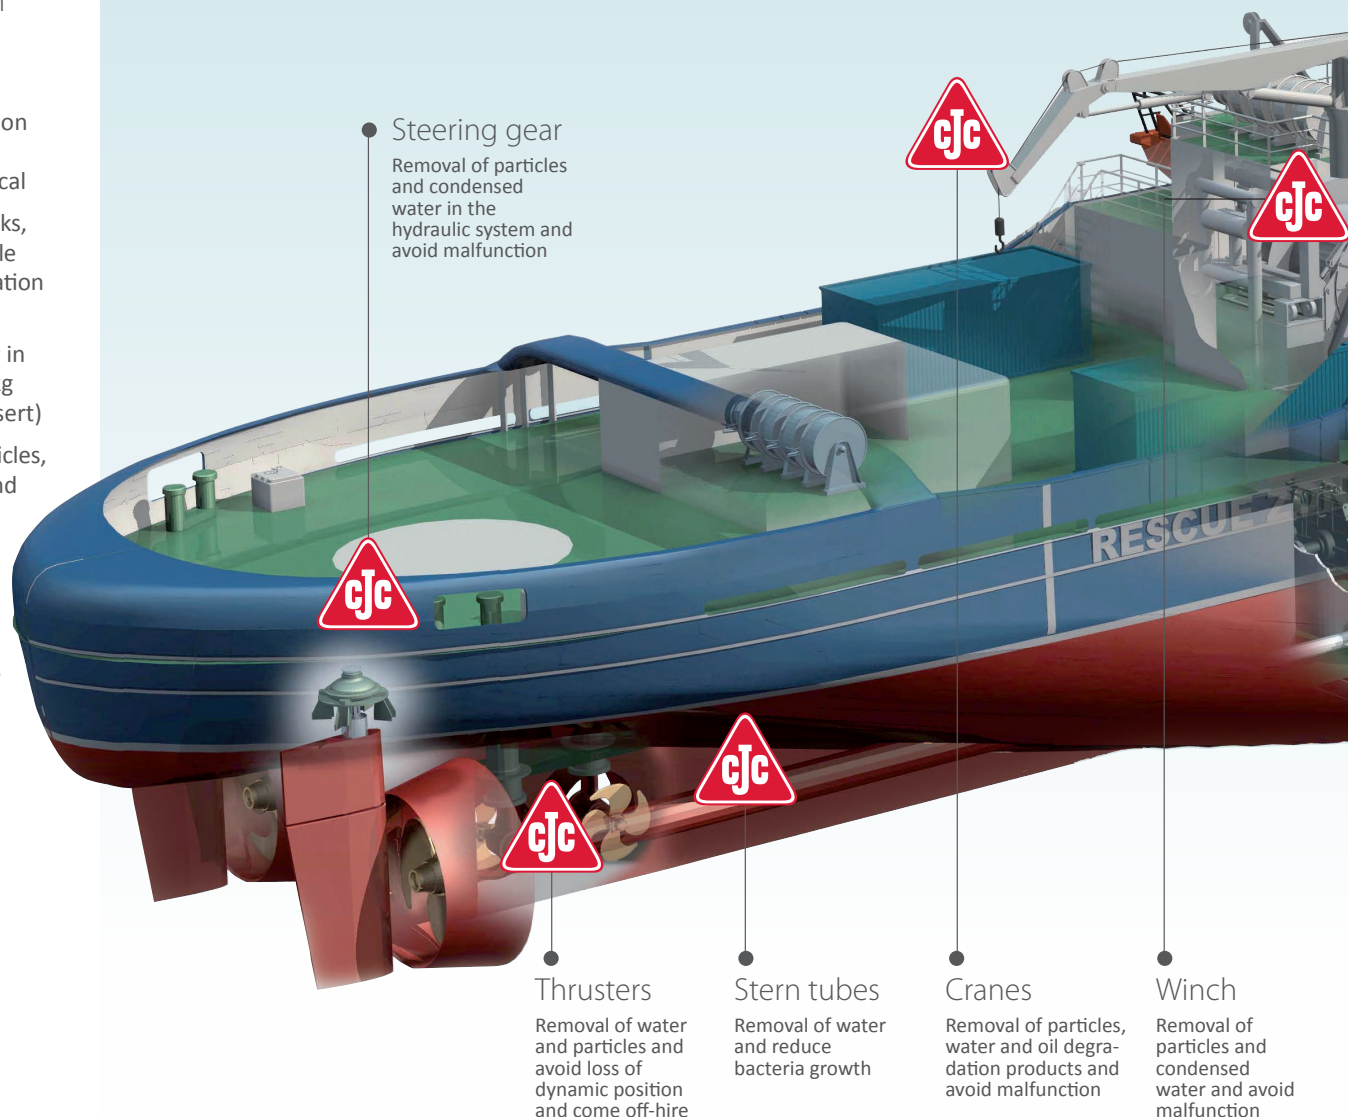

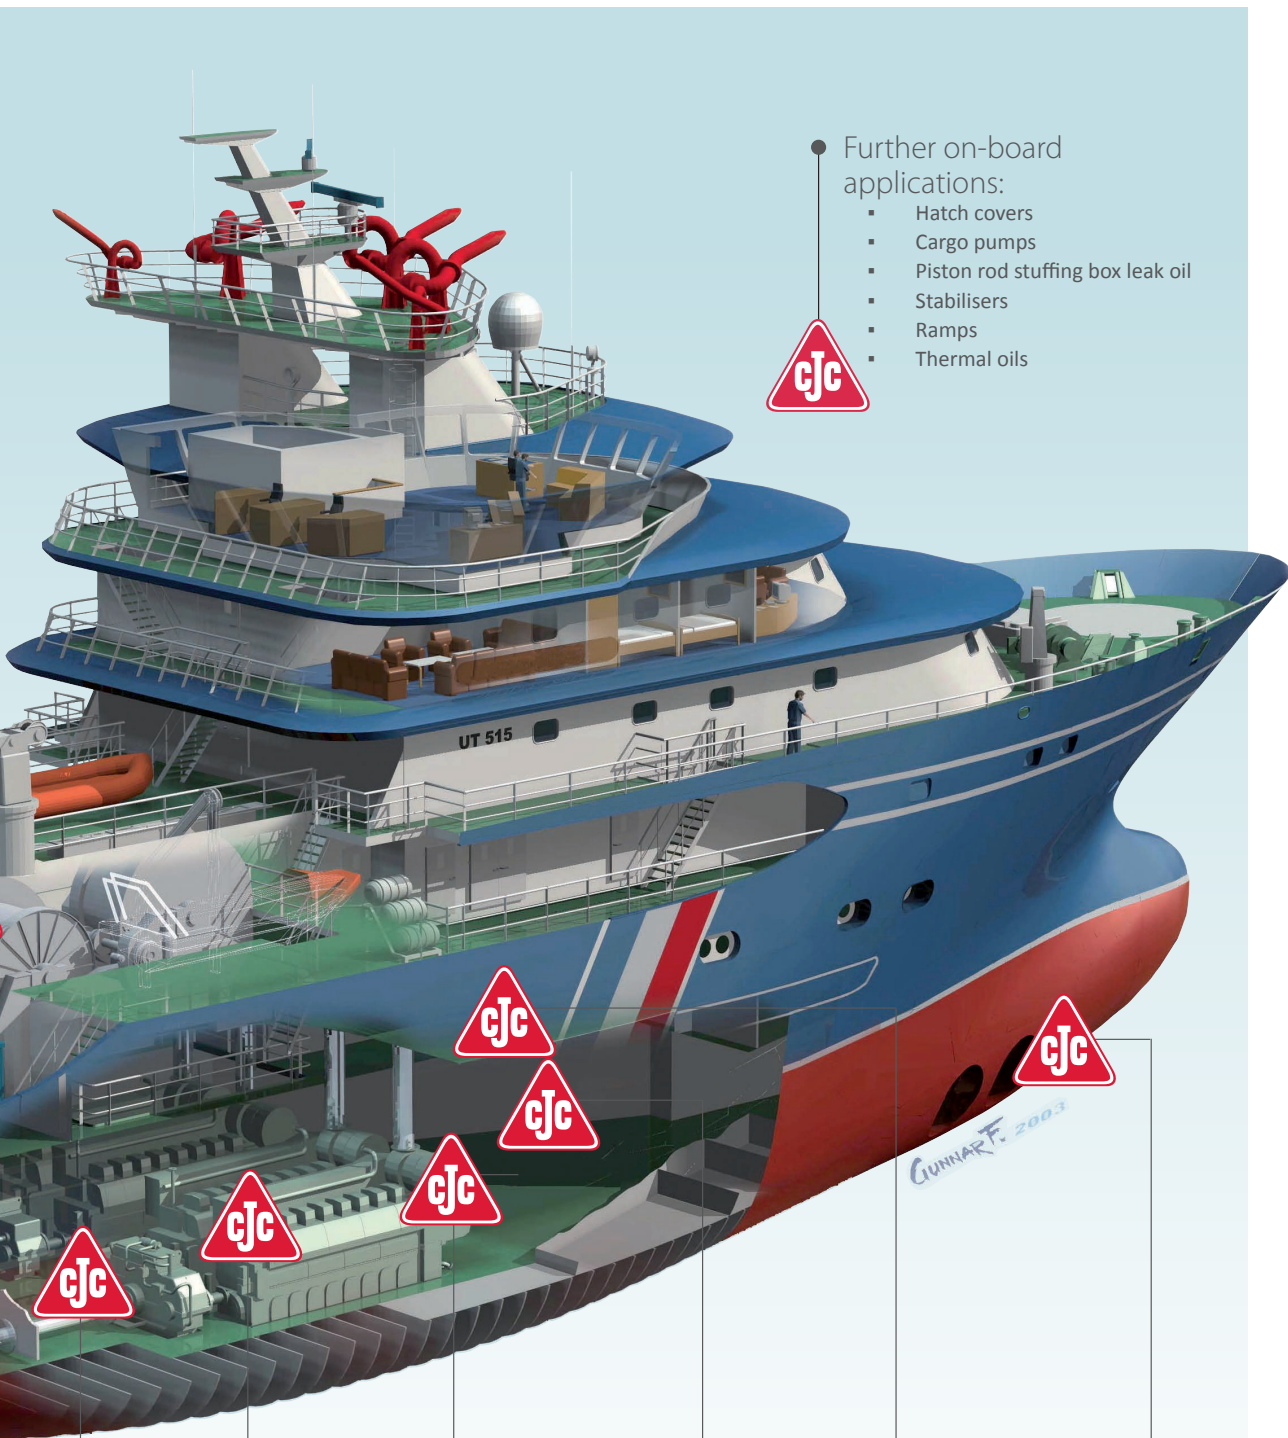

Further on-board applications:

- Hatch covers
- Cargo pumps
- Piston rod stuffing box leak oil
- Stabilisers
- Ramps
- Thermal oils

Most common benefits:

- Reduced downtime – less planned as well as unscheduled shutdowns
- Industry lowest cost per kilo dirt removed
- Short pay-back time
- Reduced maintenance costs
- Reduced wear on pumps, cylinders, bearings, etc.
- Avoid diesel bugs
- Increased oil and component lifetime

Gears

Removal of oil degradation products and particles and avoid losing propulsion

Engine LO

Removal of particles & soot and maintain TBN and avoid short oil lifetime

MDO/MGO fuel

Removal of particles and water equals zero bacterial growth and avoid premature injector replacement

Bilge water

Absorption of oil from bilge water to below 5 ppm

Hydraulic valves

Removal of oil degradation products and particles and avoid malfunction

Bow thruster

Removal of water and particles and avoid loss of dynamic position and come off-hire

Risk of failure on your equipment

Each application performs specific tasks - and high performance depends on optimum oil cleanliness

The main cause for equipment breakdown

On-board oil systems have a hard time dealing with high levels of contaminants from the environment. Some applications face a high level of solid particles, some of humid air and water, some of developing varnish-like deposits, and most face a mix of all three contaminants in various degrees. CJC™ Oil Filters are designed to deal with all of them.



Hydraulic systems

Hydraulic systems are vulnerable in terms of particle contamination from external sources as well as internal sources and oxidation of the oil. This, combined with the fact that hydraulic systems are often used on critical operational equipment such as cargo cranes, cargo pumps, winches, ramps and hatches, makes reliability of high importance.


The CJC™ HDU series offers increased reliability as well as improved component lifetime and reducing maintenance costs.



CJC™ HDU 15/25



CJC™ HDU 427/108

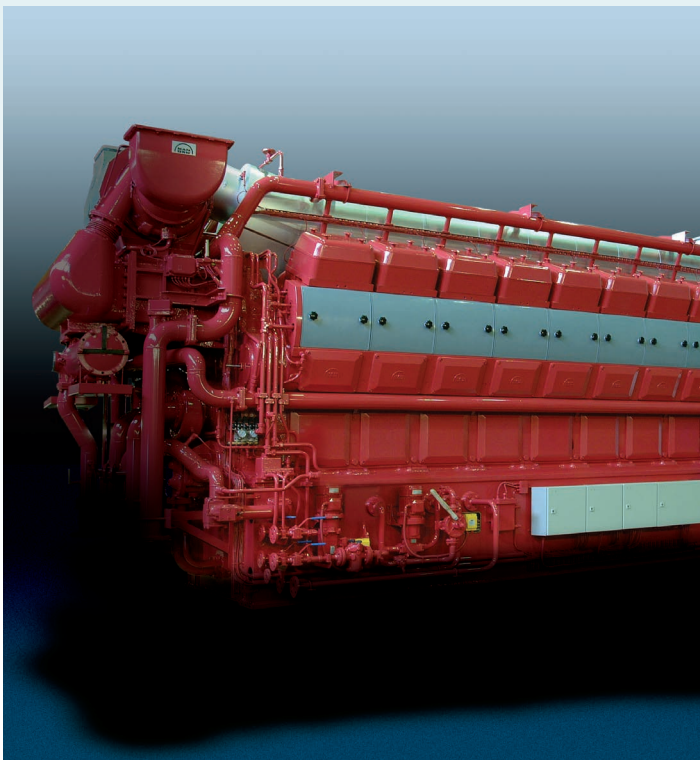

Diesel engines

Diesel fuels & lube oil systems

Service- and settling tanks for diesel engines are often accumulating solids and water, seriously influencing the performance of fuel pumps and injectors. And especially on trunk engines, the lifetime of the oil is often reduced by the contamination of soot particles.

A combination of CJC™ HDU and PTU series filters ensures prolonged lifetime of your engine, reduced cost of maintenance and improved environmental performance.



CJC™ PTU 27/54



CJC™ Marine
Lube Oil Purifier



CJC™ Marine
Diesel Purifier

80% of all oil related failures and breakdowns are caused by contaminated oil

Oil care is important since 80% of all oil related machinery repair and maintenance costs can be tracked back to contaminated system oils and fluids. This has been substantiated by several independent analyses. The main cause is wear induced by contamination through solid particles, water, acidity and oil degradation products - which are not retained effectively by most in-line filters.

Thrusters

Thrusters operate in a difficult environment. Besides the contamination of particles and oxidation residues, there is a risk of continuous water ingress.

The CJC™ PTU and Desorber series are capable of removing water to very low levels continuously. If the oil will demulsify, the PTU series offer water removal and fine filtration in one unit. If the oil is emulsified, the Desorber series offer a solution to remove the water. In both cases you can avoid expensive unscheduled dry-dockings.

The CJC™ Desorber/Filter Combi Unit removes large amounts of water **and** particles from a wide range of lubricants including emulsified oils and EAL's (Environmentally Acceptable Lubricants) / Biodegradable Lubricants.



CJC™ PTU2 27/27



CJC™
Desorber/Filter
Combi Unit



Bilge water

Overboard discharges from oily water separators receive increased attention from Port State Authorities. Regulations dictate an oil content of 15 ppm as a maximum in the effluent.

The CJC™ Blue Baleen System is capable of bringing the effluent below 5 ppm, reducing the environmental footprint and ensuring compliance with regulations, locally and globally.



CJC™ Blue Baleen 38/100



CJC™ Blue Baleen 2x38/100



Satisfied customers

Problem solving & preventive maintenance are keywords in the marine industry



J. Lauritzen, Denmark

Application:
Cranes



Ole Svendsen,
Senior inspector,
of J. Lauritzen

Small investment benefits both the environment and competitiveness

Problem

The J. Lauritzen shipping company has solved the problem of expensive crane breakdowns by buying simple oil filters

Solution

The small and simple CJC™ Fine Filter has provided the solution to a costly problem for the shipping industry. Crane breakdowns and nonworking hydraulic hatches are expensive and can create problems for both employees and the environment due to extended time in harbours and too frequent repairs and oil changes.

J. Lauritzen shipping company invested in oil filters for each of their current nine reefer vessels. In the years 1995 to 1999, one of the ships suffered no less than four crane breakdowns. Each time it required a ten-hour repair, the replacement of 1,000 litres of oil and a number of spare parts.

Mr. Ole Svendsen, Senior inspector, J. Lauritzen

"Since we installed CJC™ Fine Filters on the cranes of all refrigerator ships in 1999, we have had just one crane breakdown," said senior inspector Ole Svendsen of J. Lauritzen. He added, "This saves us money, but it is also advantageous for the environment. It is very important, both for us as a responsible shipping company and for our customers to protect the environment as much as possible."



The J. Lauritzen is one of the major Danish shipowners

➤ Bourbon Group, Les Abeilles Le Havre

Application:
Habour tug boat



*Abeille Gascogne (22),
Bourbon Group,
Les Abeilles Le Havre,
France*

Problem

The oil was highly contaminated with blow-by debris, combustion particles, soot and wear metals. Resulting in oil changes every 1000 running hours. In order to extend the oil change intervals and to lower the running costs, the owner decided to install an offline Fine Filter.

Solution

CJC™ Fine Filter HDU 27/81 MZ, with 3 x CJC™ Filter Inserts B 27/27.

Test

In order to compare the oil sample reports, the Fine Filter was only installed on the port engine and samples were taken periodically to monitor the progress of the oil contamination and characteristics.



Result

The soot contamination has been reduced immediately and the TBN value in the port engine is stabilized so that the oil could be used up to 3,000 running hours.

The oil could be used
up to 3,000 running hours

➤ Bourbon Offshore Norway

Application:
Main engines



*M/S Bourbon Mistral,
Bourbon Offshore
Norway A/S*

Problem

Ever since they were new, the engines have had problems with high levels of insolubles (0.7 to 1.0% wt) and getting very dirty inside.

Solution

A CJC™ Oil Filter was installed on one of the four engines. After 18 days of operation, an oil sample was sent to Castrol for analysis, showing that insolubles were reduced to 0.1% wt.

**Mr. Lars Inge Klauset,
Chief engineer,
M/S Bourbon Mistral:**

"I recommend that our LO separators are left ashore and that CJC™ Oil Filters are purchased also for the other main engines."

**Mr. Torbjørn Gravdal,
Technical Inspector,
Bourbon Offshore, Norway:**

"I have sailed as a chief engineer for many years, and have good experience with the CJC™ Oil Filters, so I was not surprised to see the effect of the oil filters. We are now going to install similar oil filters on the 3 other engines of the Bourbon Mistral, and on all 4 engines of the sister ship, the M/S Bourbon Monsoon."

➤ TMS-Dry, Greece - EAL/biodegradable oil

Application:
Stern tube



*Dirty CJC™ Filter Insert,
saturated with highly
emulsified EAL oil.
After filtration, the
stern tube oil is now
free of water.*



**Fleet Manager,
TMS-Dry, Bulk Carrier:**

"The CJC™ Combi Unit effectively removed the water from a very expensive lubricant, while our crew is very satisfied with easy installation and low maintenance cost of the CJC™ Units."

Problem

The EAL oil was highly contaminated with water, reaching a level of 366,502 ppm. The customer drained the oil from the stern tube and stored it in drums to avoid damage on components such as bearings and seals. As the oil was highly emulsified, water separation was not possible, neither by centrifugal forces nor by gravitational separation.

Solution

Before installation of the CJC™ Desorber/Filter Combi Unit, a sample was taken and analysed by a laboratory. This sample indicated that the water content reached a level of 351,900 ppm (35.19%). The CJC™ Desorber/Filter Combi Unit was installed on the drums and after 72 hours in operation, a second sample was taken. It appeared that the water content was now reduced to 600 ppm (0.06%). This successful water removal made the customer purchase the unit. This solution combines a CJC™ Desorber D10 with a CJC™ Fine Filter HDU 27/27 with one CJC™ Filter Insert, type BLA (3 µm absolute).

Your challenge


In most applications the in-line filter alone, cannot keep an oil system clean & dry

Optimum oil cleanliness can rarely be achieved only by in-line filtration

Contamination of an oil system leads to various problems which can result in machine downtime, frequent repairs of equipment and reduced oil lifetime. All of which means inefficient production and unnecessary expenses spent on repair and oil change.

Millipore
membrane
- sample taken
before
installation of
CJC™ Offline
Oil Filter


A contaminated oil system with only in-line filtration
without CJC™ Oil Filter

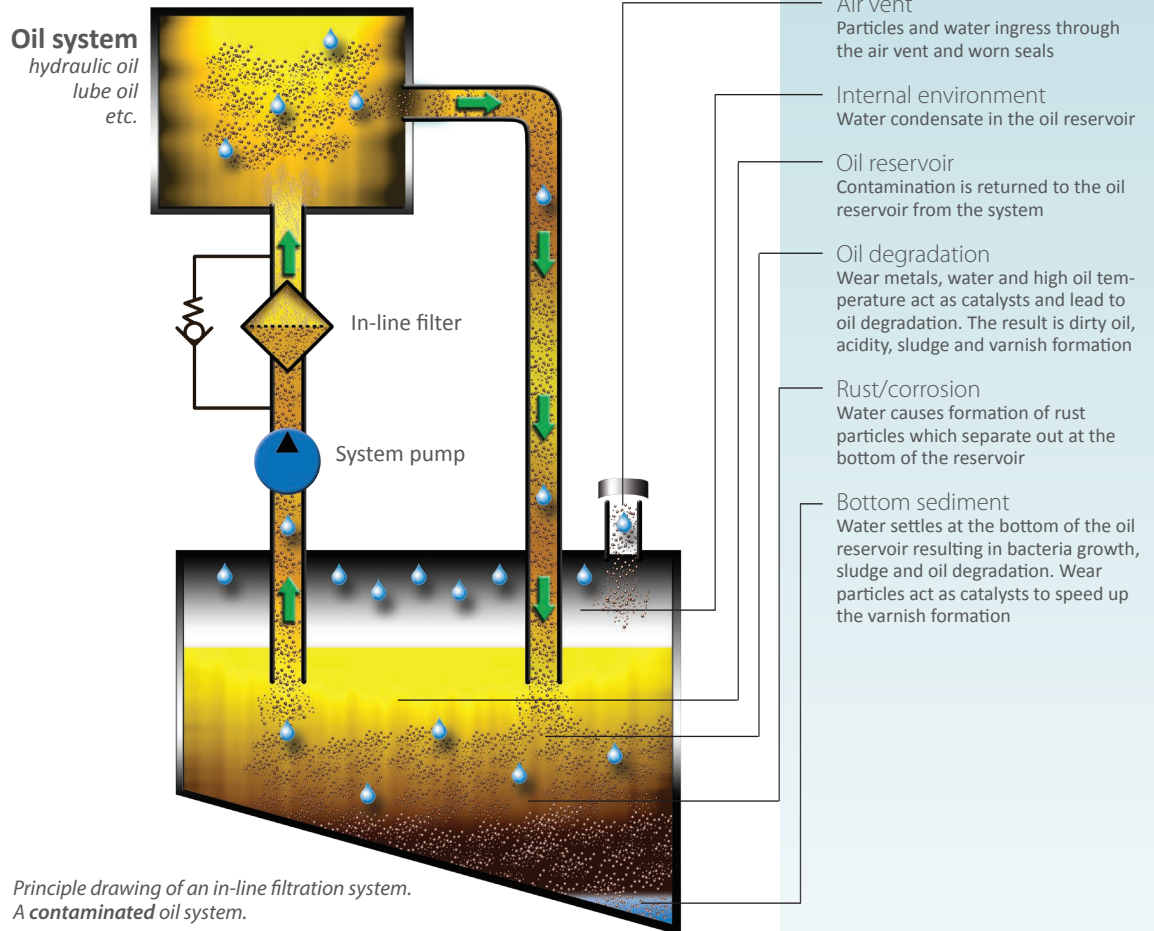

Most common types of contamination


Particles (abrasive wear / grinding)

When clearance sized hard particles are wedged between movable metal parts, they destroy the metal surface further and can result in additional wear.




Water (cavitation & pitting)

Occurs in areas where water is present and oil is compressed; the water implodes, causing the metal surfaces to crack and release more particles.




Oil degradation

Wear metal, water and high temperatures lead to oil degradation, which is the precursor of varnish. This results in sticky varnish that deposits on metal surfaces.



Acidity

Acidity can be found in oil as by-products of oil degradation, combustion of gas or fuel, hydrolysis of Ester-based fluids etc. The amount of acidity in oil should be limited, since acidity




will cause chemical corrosion of machine components and shorten the lifetime of the oil, just to mention a few of the unwanted effects.

Your natural solution

Round-the-clock removal of particles, water, acidity and oil degradation products, all in the same operation

1 oil filter - 4 solutions

CJC™ Offline Oil Filters have an unmatched high dirt holding capacity, and remove particles, water, acidity and oil degradation products, all in one and the same operation. Our oil filters are installed offline, meaning they are not system critical e.g. machinery shutdown is not necessary when changing filter insert.

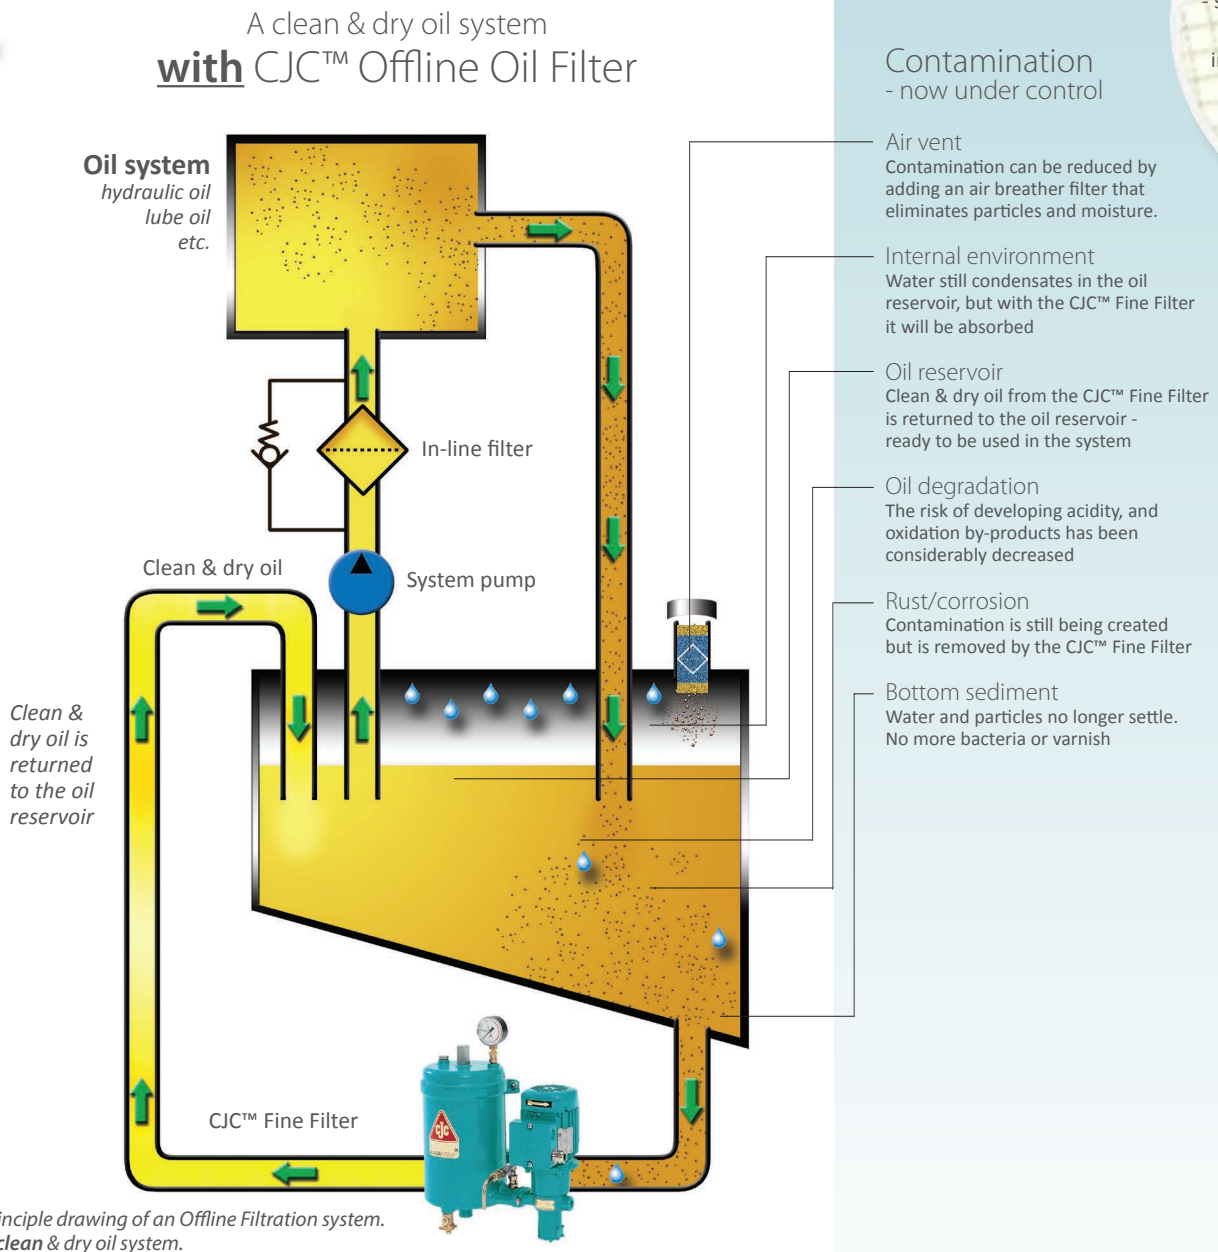

Contamination capacities

All CJC™ Filter Inserts have outstanding oil filtration capabilities with filtration degrees of 3 µm (micron) absolute. This means that 98.7% of all solid particles larger than 3 µm and approximately 50% of all particles larger than 0.8 µm are retained - in one single pass.

Capacities:	15/25 series:	27/27 Series:	
Particles	1.5 kg	4-8 kg	per insert
Water	0,75 L	2 L	per insert
Varnish	1 L	4 L	per insert



Your natural solution

All CJC™ Oil Filter series are of simple design, easy to install and almost maintenance free

Optimum oil performance with CJC™ Oil Filters & Purifiers

CJC™ HDU series

The CJC™ Fine Filters remove particles, water, and oil degradation products from hydraulic, gear and lubrication oils and have flow rates from 45 to 20,000 L/h.



CJC™ HDU 27/27



CJC™ Marine
Lube Oil Purifier

CJC™ PTU series

The CJC™ Filter Separators combine depth filtration with water separation and are used for water contaminated diesel, hydraulic and steam turbine lube oils.

The CJC™ PTU Series continuously removes water from oil in large volumes.



CJC™ PTU2 27/27



CJC™ Marine
Diesel Purifier

CJC™ Filter Insert system

All CJC™ Filter Inserts have a 3 µm absolute filtration ratio. The CJC™ Filter Inserts are produced of **100% natural cellulose fibres** from sustainable resources - no metal, no plastic, no chemicals.

- **Particles** down to 0.8 µm are retained in the unic CJC™ depth filter media (cellulose).
- **Water** is removed either by absorption or separation according to oil system requirements.
- **Acidity** can be neutralized with ion exchange resin media.
- **Oil degradation products** are removed by the attraction to the polar fibers.



Modular build-up

The modular build-up of the CJC™ Filter Inserts means that a CJC™ Fine Filter can be designed to fit any applications and requirements



CJC™ Desorber series

The CJC™ Desorbers provide solutions for removal of water in mineral, synthetic and high viscosity oils.

The Desorbers remove water even from stable emulsions and from oils with a density above 1.

CJC™ Desorber D10



CJC™ Desorber/Filter Combi Unit

The CJC™ Desorber/Filter Combi unit is a combination of a CJC™ Desorber D10 and a CJC™ Fine Filter, HDU 27/27.

The Desorber/Filter Combi unit **removes large amounts of water, varnish and particles** from a wide range of lubricants including emulsified oils and **EAL's** (Environmentally Acceptable Lubricants) / **Biodegradable Lubricants**.

CJC™ Desorber/Filter Combi Unit



CJC™ Blue Baleen series

CJC™ Blue Baleen System

The CJC™ Blue Baleen System absorbs oil from bilge water effluent and is capable of reducing the oil content to a value less than 5 ppm. This ensures that environmental performance, objectives and targets are met.

The CJC™ Blue Baleen OilAbsorb Insert ensures a fast return of investment due to its high yield compared to the cost of landing bilge water ashore



CJC™ Blue Baleen Insert



CJC™ Blue Baleen System

C.C.JENSEN

- contact us today!



Over 64 years
of innovation &
market leadership



Manufacturing & headquarters

C.C.JENSEN A/S

Løvholmen 13 | DK - 5700 Svendborg | Denmark

Tel. +45 6321 2014 | Fax: +45 6222 4615

sales@cjc.dk | www.cjc.dk

C.C.JENSEN subsidiaries and sales offices

Belgium

C.C.JENSEN Belgium
Tel.: +32 484 25 36 96
ccjensen.be@cjc.dk
www.ccjensen.be

Benelux

C.C.JENSEN Benelux B.V.
Tel.: +31 182 37 90 29
ccjensen.nl@cjc.dk
www.ccjensen.nl

Chile

C.C.JENSEN S.L. Limitada
Tel.: +56 2 739 2910
ccjensen.cl@cjc.dk
www.ccjensen.cl

China

C.C.JENSEN Filtration
Equipment (Tianjin) Co. Ltd.
Tel.: +86 10 6436 4838
ccjensen.cn@cjc.dk
www.ccjensen.cn

Denmark

C.C.JENSEN Danmark
Tel.: +45 6321 2014
ccjensen.dk@cjc.dk
www.cjc.dk

France

C.C.JENSEN France
Tel.: +33 (0)6 29 12 42 66
ccjensen.fr@cjc.dk
www.ccjensen.fr

Germany

KARBERG & HENNEMANN
GmbH & Co. KG
Tel.: +49 (0)40 855 04 79 0
kontakt@cjc.de
www.cjc.de

Greece

C.C.JENSEN Greece Ltd.
Tel.: +30 210 42 81 260
ccjensen.gr@cjc.dk
www.ccjensen.gr

India

C.C.JENSEN India
Tel.: +91 4426241364
ccjensen.in@cjc.dk
www.ccjensen.in

Ireland

C.C.JENSEN Ireland
Tel.: +353 86 82 71 508
ccjensen.ie@cjc.dk
www.ccjensen.ie

Italy

KARBERG & HENNEMANN srl
Tel.: +39 059 29 29 498
info@cjc.it
www.cjc.it

Poland

C.C.JENSEN Polska Sp. z o.o.
Tel.: +48 22 648 83 43
ccjensen@ccjensen.com.pl
www.ccjensen.pl

Spain

C.C.JENSEN Ibérica, S. L.
Tel.: +34 93 590 63 31
ccjensen.es@cjc.dk
www.cjc.dk

Sweden

C.C.JENSEN AB
Tel.: +46 8 755 4411
sales@ccjensen.se
www.ccjensen.se

United Arab Emirates

C.C.JENSEN Middle East
Tel.: +971 4 447 2886
ccjensen.uae@cjc.dk
www.cjc.ae

United Kingdom

C.C.JENSEN Ltd.
Tel.: +44 1 388 420 721
filtration@cjcuk.co.uk
www.ccjensen.co.uk

USA

C.C.JENSEN Inc.
Tel.: +1 770 692 6001
ccjensen@ccjensen.com
www.ccjensen.com



Scan the QR code and find
your nearest distributors
at www.cjc.dk/contact

- or give us a call!

Your local C.C.JENSEN distributor

C.C.JENSEN A/S

www.cjc.dk

