



CABLE CLEATS



AN ISO 9001 : 2008 COMPANY

AXIS ELECTRICAL COMPONENTS (I) PVT. LTD.


AXIS House, Plot# 104C, Kandivali Co-Op Industrial Est. Ltd., Kandivali (W),
Mumbai - 400067, INDIA

Tel # +91-22-67756000 / 28696636, Fax # +91-22-28678491


email: marketing@axis-india.com

www.axis-india.com

A TOTAL SOLUTION

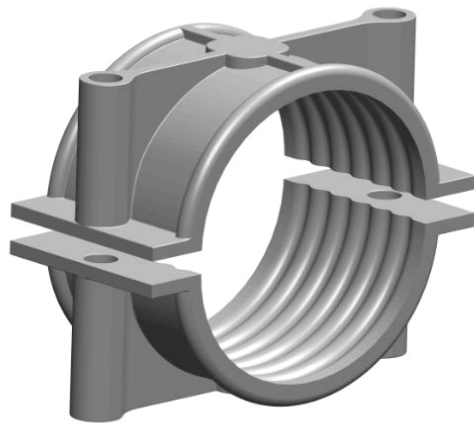


- Suitable for use with cable diameters 30 to 135 mm.
- Manufactured from Aluminium alloy.
- Two-piece, two fixing design.
- Can be double stacked on common fixings.
- Operating temperature -60°C to +105°C.
- Suitable for LV & HV cables upto 132KV.
- Can be used for all types of cable routes.
- Plain finish for normal industrial areas or indoor application.
- Epoxy coated version available for harsh environments/outdoor.
- Optional Neoprene & EPDM liner available.
- In accordance with BS EN 61914:2009.
- Short circuit withstand : 110 KA (peak)
- Supplied with SS 304 Fastners.

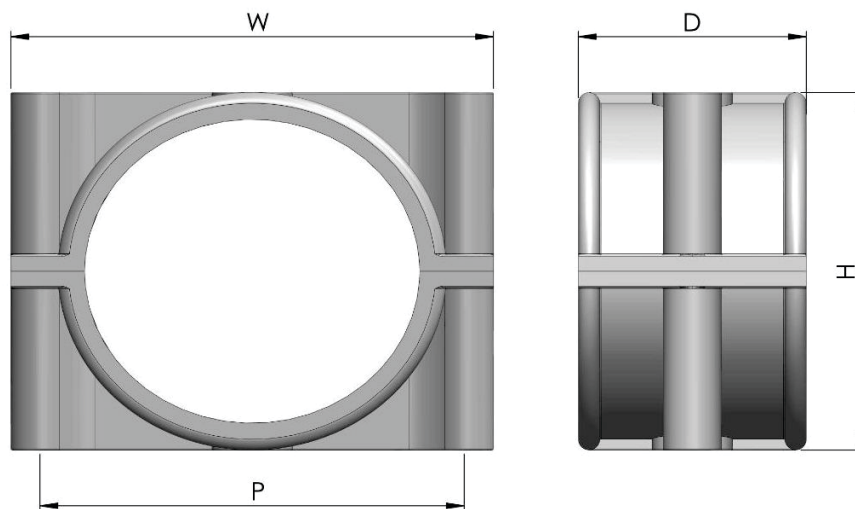


Cable Diameter (mm)		Cable Diameter With Liner (mm)			W (mm)	H (mm)	D (mm)	P (mm)	Fixing Bolt	E - CODE
Min.	Max.	Min.	Liner Thk.	Max.						
30	40	26	2	36	93	42	45	71	2 x M10	AXSC040
40	50	36	2	46	104	52	45	82	2 x M10	AXSC050
48	55	44	2	51	108	60	45	86	2 x M10	AXSC055
55	64	51	2	60	118	67	50	95	2 x M10	AXSC064
64	70	60	2	66	125	76	50	102	2 x M10	AXSC070
70	76	66	2	72	130	82	50	108	2 x M10	AXSC076
76	83	72	2	79	138	90	60	115	2 x M12	AXSC083
83	89	79	2	85	144	97	60	121	2 x M12	AXSC089
89	95	85	2	91	152	107	60	130	2 x M12	AXSC095
95	101	91	2	97	158	113	60	136	2 x M12	AXSC101
101	115	97	2	111	175	119	85	152	2 x M12	AXSC115
115	125	111	2	121	180	133	85	158	2 x M12	AXSC125
125	135	121	2	131	192	143	85	170	2 x M12	AXSC135

NOTE : ADD SUFFIX "L" TO E-CODE FOR CABLE CLEAT WITH LINER

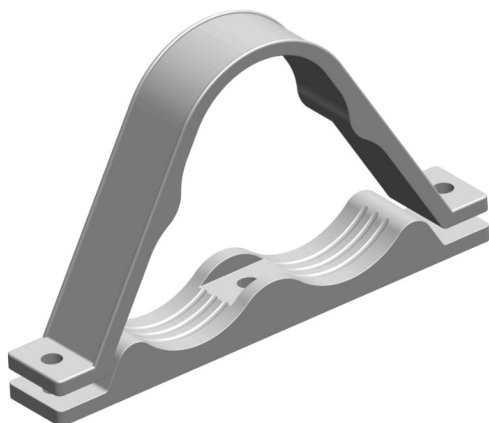

- Suitable for use with cable diameters 15 to 150 mm.
- Manufactured from Aluminium alloy.
- Two-piece, two fixing design.
- Operating temperature -60°C to +105°C.
- Suitable for LV & HV cables.
- Can be used for all types of cable routes.
- Plain finish for normal industrial areas or indoor application.
- Epoxy coated version available for harsh environments/outdoor.
- Optional Neoprene & EPDM liner available.
- In accordance with BS EN 61914:2009.
- Supplied with SS 304 Fastners.

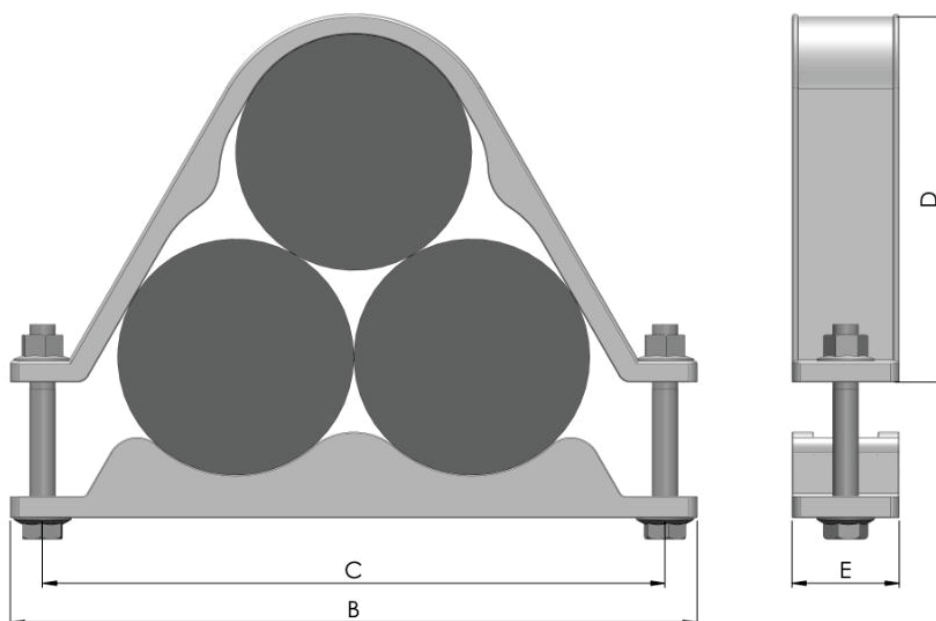

Cable Diameter (mm)		Cable Diameter with Liner (mm)			B (mm)	C (mm)	D (mm)	E (mm)	E-CODE
Min.	Max.	Min.	Liner Thk.	Max.					
15	30	11	2	26	110	90	47	30	AXTC030
30	45	26	2	41	155	130	67	30	AXTC045
45	60	41	2	56	190	165	90	40	AXTC060
60	75	56	2	71	230	200	110	40	AXTC075
75	90	71	2	86	270	245	142	40	AXTC090
90	105	86	2	101	320	290	170	50	AXTC105
105	120	101	2	116	380	340	200	60	AXTC120
120	135	116	2	131	405	370	225	60	AXTC135
135	150	131	2	146	450	410	250	60	AXTC150

NOTE : ADD SUFFIX "L" TO E-CODE FOR CABLE CLEAT WITH LINER