


E2W CABLE GLAND

- Type of Cable Gland : DNLE2W
- Cable Type : Single Wire Armoured with Lead Sheath covered.
- Double Compression : Cable inner(lead sheath) bedding & Outer Sheath.
- Indoor and Outdoor use.
- Operating Temperature : -60 °C to +100 °C
- Materials : Brass, Brass with nickel plated, Aluminum and Stainless Steel 316.
- Ingress Protection : IP66

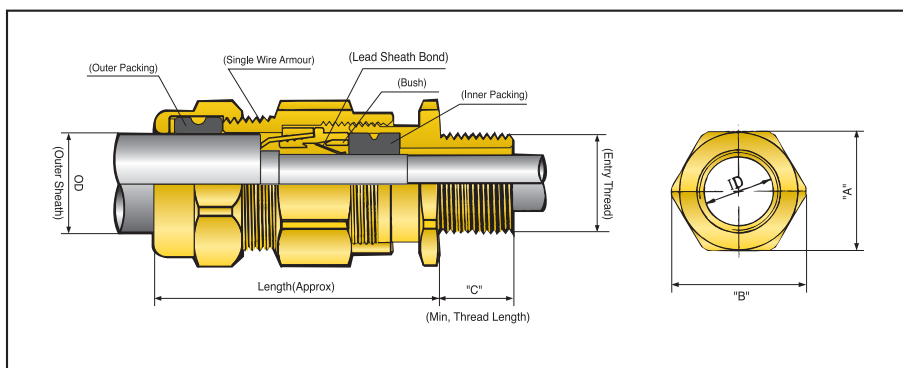

Gland Size	Entry Thread Size		Cable Acceptance Details							Hexagon Dimensions		Thread Length "c"	
			Lead Cover 'OD' (*)				Outer Sheath 'OD'		Armour Size				
	Standard Seal		Alternative Seal (S)		Across Flats "A"	Across Corners "B"				Metric	NPT		
	Metric	NPT	Min.	Max.	Min.	Max.	Min.	Max.	Min/Max.				
DNLE2W-20a	M20/M16	1/2"	5.5	8.0	-	-	7.0	12.0	0.9/1.25	24	26.8	15	15.5
DNLE2W-20b	M20/M16	1/2"	7.5	9.0	5.5	8.0	11.0	16.0	0.9/1.25	24	26.8	15	15.5
DNLE2W-20d	M20	1/2"	11.0	13.7	8.5	12.0	14.3	20.0	0.9/1.25	30	33.5	15	15.5
		3/4"											
DNLE2W-25a	M25	3/4"	13.0	16.7	10.5	15.4	18.5	26.0	1.25/1.6	36	40.5	15	15.5
		1"											20
DNLE2W-32	M32	1"	20.0	23.5	15.0	21.2	24.0	33.0	1.6/2.0	45.8	51.2	15	20
		1 1/4"											20
DNLE2W-40a	M40	1 1/4"	22.0	28.0	25.0	30.0	28.0	35.0	1.6/2.0	55	61.5	15	20
		1 1/2"											20.5
DNLE2W-40	M40	1 1/4"	25.0	30.0	22.0	28.0	30.0	41.0	1.6/2.0	55	61.5	15	20
		1 1/2"											20.5
DNLE2W-50a	M50	1 1/2"	27.5	36.5	31.5	41.0	36.0	45.0	1.8/2.5	65	72.8	15	20.5
		2"											21.0
DNLE2W-50	M50	1 1/2"	31.5	41.0	27.5	36.5	42.0	52.6	1.8/2.5	65	72.8	15	20.5
		2"											21
DNLE2W-63a	M63	2"	39.0	47.0	42.5	53.0	46.0	56.0	1.8/2.5	80	89.5	15	21
		2 1/2"											32.0
DNLE2W-63	M63	2"	42.5	53.0	39.0	47.0	52.0	65.5	1.8/2.5	80	89.5	15	21.0
		2 1/2"											32.0
DNLE2W-75a	M75	2 1/2"	49.0	58.3	54.5	64.3	57.0	67.0	1.8/2.5	95	104.5	15	32.0
		3"											33.5
DNLE2W-75	M75	2 1/2"	54.5	64.3	49.0	58.3	64.0	78.3	1.8/2.5	95	104.5	15	32.0
		3"											33.5
DNLE2W-80	M80	3 1/2"	67.0	70.0	60.0	68.0	75	89.5	1.8/3.2	107	114	20	35.0
DNLE2W-90	M90	3 1/2"	67.0	75.0	60.0	68.0	75	89.5	1.8/3.2	115	123	20	35.0
DNLE2W-100	M100	4"	76.5	89.5	70.0	81.0	88	104.5	1.8/3.2	128	139	20	36.0

* Lead Sheath Diameter

Accessories

Lock-Nut, Sealing washer, Serrated washer, Earth Tag and PVC Shroud - see page A40


How to order

DNLE2W-25a-M25

- Entry Thread Size(metric or NPT)
- Cable Gland Type & Size

E2X CABLE GLAND

- Type of Cable Gland : DNLE2X
- Cable Type : Wire Braid Armoured, Steel Tape Armoured or Screened Flexible Wire Braid with Lead Sheath covered.
- Double Compression : Cable inner (lead sheath) bedding & Outer Sheath.
- Indoor and Outdoor use.
- Operating Temperature : -60 °C to +100 °C
- Materials : Brass, Brass with nickel plated, Aluminum and Stainless Steel 316.
- Ingress Protection : IP66

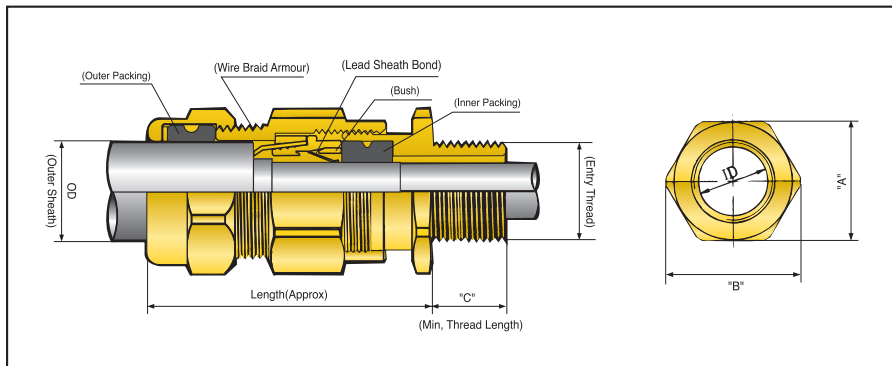

Gland Size	Entry Thread Size		Cable Acceptance Details							Hexagon Dimensions		Thread Length "c"	
			Lead Cover 'OD' (*)				Outer Sheath 'OD'		Armour Size				
	Standard Seal		Alternative Seal (S)		Across Flats "A"	Across Corners "B"				Metric	NPT		
	Metric	NPT	Min.	Max.			Min.	Max.	Min.			Max.	Min/Max.
DNLE2X-20a	M20/M16	1/2"	5.5	8.0	-	-	7.0	12.0	0/0.7	24	26.8	15	15.5
DNLE2X-20b	M20/M16	1/2"	7.5	9.0	5.5	8.0	11.0	16.0	0/0.7	24	26.8	15	15.5
DNLE2X-20d	M20	1/2"	11.0	13.7	8.5	12.0	14.3	20.0	0/0.7	30	33.5	15	15.5
		3/4"											
DNLE2X-25a	M25	3/4"	13.0	16.7	10.5	15.4	18.5	26.0	0/0.7	36	40.5	15	15.5
		1"											20
DNLE2X-32	M32	1"	20.0	23.5	15.0	21.2	24.0	33.0	0/0.7	45.8	51.2	15	20
		1 1/4"											20
DNLE2X-40a	M40	1 1/4"	22.0	28.0	25.0	30.0	28.0	35.0	0/0.7	55	61.5	15	20
		1 1/2"											20.5
DNLE2X-40	M40	1 1/4"	25.0	30.0	22.0	28.0	30.0	41.0	0/0.7	55	61.5	15	20
		1 1/2"											20.5
DNLE2X-50a	M50	1 1/2"	27.5	36.5	31.5	41.0	36.0	45.0	0/1.0	65	72.8	15	20.5
		2"											21.0
DNLE2X-50	M50	1 1/2"	31.5	41.0	27.5	36.5	42.0	52.6	0/1.0	65	72.8	15	20.5
		2"											21
DNLE2X-63a	M63	2"	39.0	47.0	42.5	53.0	46.0	56.0	0/1.0	80	89.5	15	21
		2 1/2"											32.0
DNLE2X-63	M63	2"	42.5	53.0	39.0	47.0	52.0	65.5	0/1.0	80	89.5	15	21.0
		2 1/2"											32.0
DNLE2X-75a	M75	2 1/2"	49.0	58.3	54.5	64.3	57.0	67.0	0/1.0	95	104.5	15	32.0
		3"											33.5
DNLE2X-75	M75	2 1/2"	54.5	64.3	49.0	58.3	64.0	78.3	0/1.0	95	104.5	15	32.0
		3"											33.5
DNLE2X-80	M80	3 1/2"	67.0	70.0	60.0	68.0	75	89.5	0/1.0	107	114	20	35.0
DNLE2X-90	M90	3 1/2"	67.0	75.0	60.0	68.0	75	89.5	0/1.0	115	123	20	35.0
DNLE2X-100	M100	4"	76.5	89.5	70.0	81.0	88	104.5	0/1.0	128	139	20	36.0

* Lead Sheath Diameter

Accessories

Lock-Nut, Sealing washer, Serrated washer, Earth Tag and PVC Shroud - see page A40


How to order

DNLE2X-25a-3/4NPT

- Entry Thread Size (metric or NPT)
- Cable Gland Type & Size

A2 CABLE GLAND

- Type of Cable Gland : A2
- Cable Type : Unarmoured.
- Sealing Area : Cable Outer Sheath - Single Compression.
- Operating Temperature : -60 °C to +100 °C
- Materials : Brass, Brass with nickel plated, Aluminum and Stainless Steel 316
- Ingress Protection : IP66/67

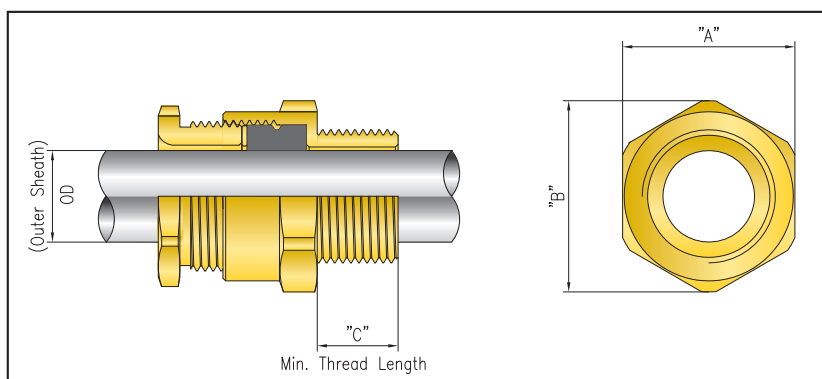

* PF Thread is available upon on request.

Cable Gland Size	Part No	Entry Thread Size(*)			Cable Acceptance Details (Outer Sheath 'OD')				Hexagon Dimensions		Min, Thread Length "c"	
		Standard		Option	Standard Seal		Alternative Seal(S)		Across Flats "A"	Across Corners "B"		
		Metric	NPT	NPT	Min.	Max.	Min.	Max.			Metric	NPT
A2-M16a	A2-S-16a	M16	-	-	3.0	6.0	-	-	22	24.5	15	-
A2-M16b	A2-S-16b				6.1	10.0	4.0	8.0			15	
A2-M20a	A2-S-20a	M20	1/2"	3/4"	3.0	6.0	-	-	24	26.8	15	15.5
A2-M20b	A2-S-20b				6.1	10.0	4.0	8.0			15	
A2-M20c	A2-S-20c	M20	1/2"	3/4"	10.1	15.0	8.5	13.0	27	30	15	15.5
A2-M25	A2-S-25	M25	3/4"	1"	12.0	18.0	10.0	15.0	32	35.5	15	15.5
A2-M25a	A2-S-25a				16.0	20.5	-	-			20	
A2-M32a	A2-S-32a	M32	1"	1 1/4"	18.1	23.0	16.0	21.0	39	43.5	15	20
A2-M32b	A2-S-32b				21.0	26.0	20.0	24.0				
A2-M40	A2-S-40	M40	1 1/4"	1 1/2"	26.1	32.0	22.0	28.0	48	53.5	15	20
A2-M50	A2-S-50	M50	1 1/2"	2"	32.1	40.0	28.0	35.0	58	64	15	20.5
A2-M63a	A2-S-63a	M63	2"	2 1/2"	40.1	47.0	37.0	44.0	73	81	15	21
A2-M63b	A2-S-63b				47.1	54.0	43.0	50.0			15	32
A2-M75	A2-S-75	M75	2 1/2"	3"	55.1	65.0	50.0	58.0	85	94	15	32
A2-M80	A2-S-80	M80	3"	3 1/2"	65.1	71.5	61.0	67.0	100	109.5	20	35
A2-M90	A2-S-90	M90	3"	3 1/2"	70.0	77.6	67.0	73.0	105	113.5	20	35
A2-M100a	A2-S-100a	M100	4"	-	73.5	86.0	-	-	122	135	20	35
A2-M100b	A2-S-100b		-	-	80.0	92.0	-	-	122	135	20	35
A2-M115a	A2-S-115a	M115	-	-	86.0	98.0	-	-	138	152	20	-
A2-M115b	A2-S-115b		-	-	92.0	102.0	-	-	138	152	20	-
A2-M130a	A2-S-130a	M130	-	-	97.0	110.0	-	-	154	168	20	-
A2-M130b	A2-S-130b		-	-	104.0	116.0	-	-	154	168	20	-

Accessories

Lock-Nut, Sealing washer, Serrated washer, Earth Tag and PVC Shroud - see page A40

How to order

A2-25 - M25


- Entry Thread Size(metric or NPT)
- Cable Gland Type & Size

MC CABLE GLAND

- Type of Cable Gland : DMC
- Cable Type : For MC Cables
- Weather Proof Application
- For use with continuous corrugated interlocked and welded metal clad(MC) and Teck type cables.
- Materials : Brass / Brass with nickel plated / Aluminum / Stainless Steel 316(L)
- Ingress Protection : IP66
- Operating Temperature Range : -60 °C to +100 °C
- Suitable for use in Zone1, Zone2, Zone21 and Zone22, Gas Groups, IIA, IIB and IIC.



MC Cable

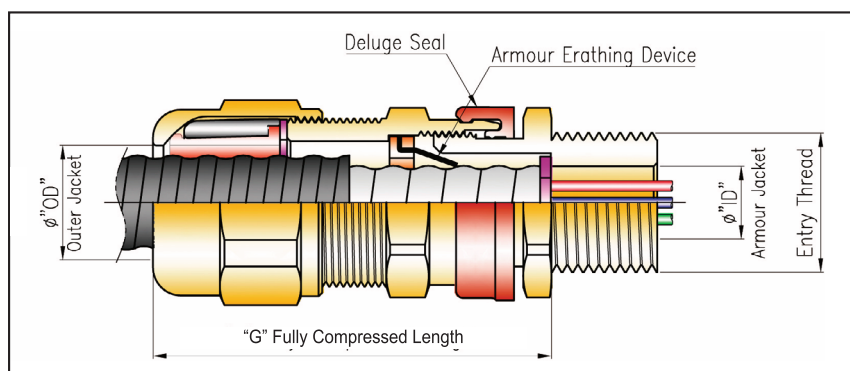

Gland Size	Entry Thread Size			Cable Acceptance Details				Hexagon Dimensions		Thread Length "C"		
	Metric	NPT		Armour Jacket "ID"		Outer Jacket "OD"		Across Flats "A"	Across Corners "B"	Metric (min)	NPT	
		Standard	Option	Min.	Max.	Min.	Max.				Standard	Option
DMC - 20	M20	1/2"	-	5.5	9.5	7.0	12.0	24	26.8	15	20	20
DMC - 20a				9.5	14.5	11.0	16.0	24	26.8			
DMC - 20d	M20	1/2"	3/4"	12.8	17.5	14.3	20.0	30	33.5		20	25
DMC - 25	M25	3/4"	1"	15.5	23.0	18.5	26.0	36	40			
DMC - 32	M32	1"	1-1/4"	21.0	30.0	24.0	33.0	45.8	51.2		25	25.6
DMC - 40	M40	1-1/4"	1-1/2"	27.0	38.0	30.0	41.0	55	61.5		25.6	26
DMC - 50	M50	1-1/2"	2"	35.0	48.0	38.0	51.0	65	72.8		26	27
DMC - 63	M63	2"	2-1/2"	45.0	61.0	48.0	64.0	80	89.5		27	40
DMC - 75	M75	2-1/2"	3"	57.0	74.0	60.0	77.0	95	104.5	20	40	41.5
DMC - 80	M80	3-1/2"	-	71.0	85.5	75.0	89.5	107	115		42.7	-
DMC - 90	M90	3-1/2"	-	71.0	85.5	75.0	89.5	115	123			
DMC - 100	M100	4"	-	83.0	100.0	88.0	104.5	128	139		44	-
DMC - 115	M115	4"	-	94.0	108.0	99.0	113.0	138	146.5			

Accessories

Lock-Nut, Sealing washer, Serrated washer, Earth Tag and PVC Shroud - see page A40

How to order

DMC-20d - 1/2NPT

- Entry Thread Size(Metric or NPT)
- Cable Gland Type & Size