



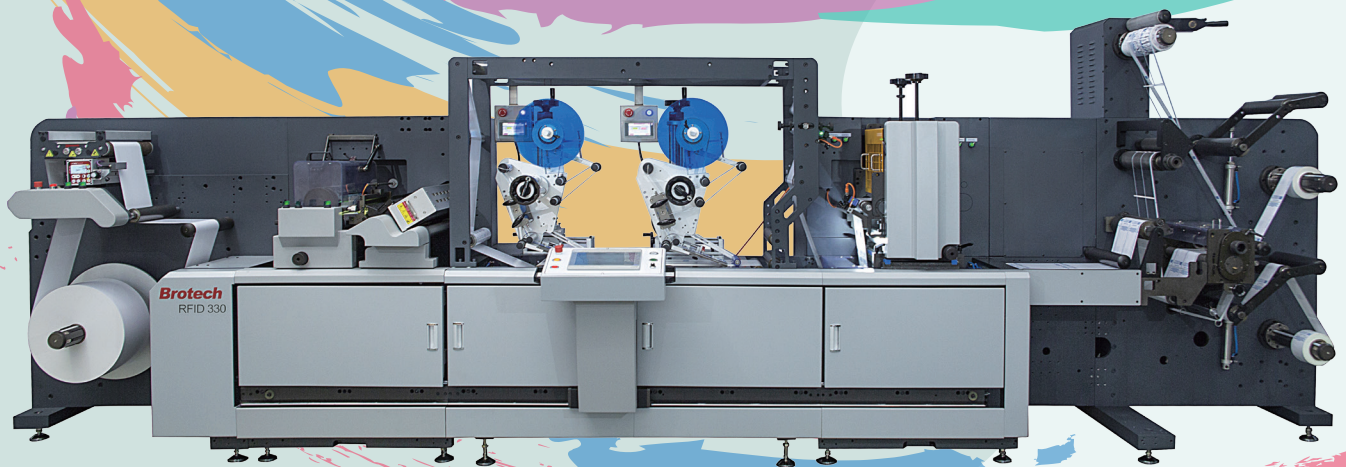

Smart Label & EAS Label Converting System

- Designed for the production of smart labels (RFID), security labels/cards and EAS applications.
- Functions of flexo printing, varnish, spot varnish & super varnish, cold foil, chip and antenna insertion, delam/relam, lamination, die cutting, slitting, rewinding.
- No waste or wasted/crushed antennas or chips.

Smart Label & EAS Label Converting System

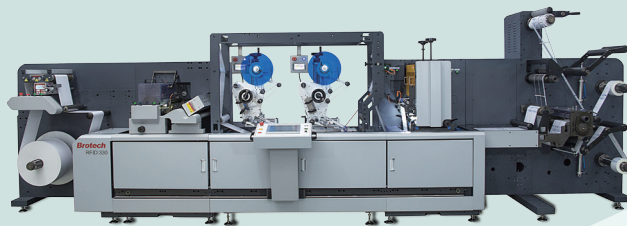

TECHNICAL SPECIFICATIONS

Max web width	340/430/530mm
Max unwind diameter	700mm
Max rewind diameter	600mm
Max die cutting width	330/420/520mm
Max mechanical speed	120m/min
Die cutting registration tolerance	±0.15mm
Air supply	8bar
Rating voltage	3PH+N+PE
Size (length×width×height)	2.6×1.8×1.6m
Machine weight	2.5T

CONTACT US

BROTECH DIGITAL GRAPHICS CO.,LTD

Shenzhen Headquarter : 1st Floor, 8th Building, TongFuYu Industrial Park, YongHe Road, Fuyong town, Baoan District, Shenzhen, China. Tel: +86-755-8373 3867

Jiangsu Factory : No.1 YangFan Road, New District, Zhenjiang, Jiangsu, China. Tel: +86-511-8880 0886

Guangdong Factory : 5F, Building 1, OFILM Imaging Industry Research Center, Binhaiwan, Dongguan, Guangdong, China.

BROTECH DIGITAL GRAPHICS NORTH AMERICA

1203 Murdock Ct Naperville, IL 60540 Tel: +1630 7190 1968

Email: sales@bro-tech.net
www.bro-tech.net

Brotech

