


ADAPTOR

Application

- Flameproof (Ex 'd') & Increased Safety (Ex 'e')
- Connection between cable entry devices and equipment having dis-similar threads.
- Male, Female threads : Metric to Metric, Metric to NPT, NPT to NPT, NPT to Metric
- Operating Temperature : -60°C to +100°C
- Materials : Brass / Brass with Nickel plated / Aluminum / Stainless Steel 316
- Ingress Protection : IP66
- Certificate No : Baseefa08 ATEX 0019X / IECEx BAS08.0008X.

TR-CU : 0338518

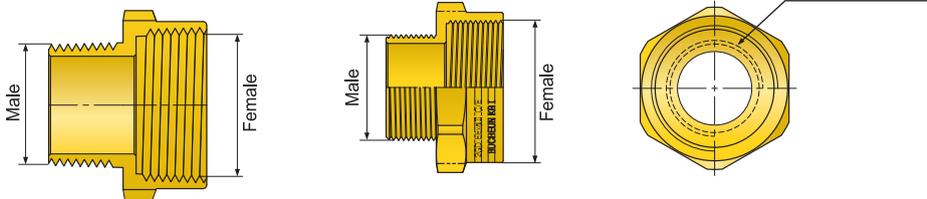


HAZARDOUS AREA CABLE GLAND

		Female Thread (*)																			METRIC "E"		
		METRIC										NPT											
Male Thread (*)	METRIC	M16	M20	M25	M32	M40	M50	M63	M75	M80	M90	M100	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	3 1/2"	4"	
		M16	⊗	⊗	⊗									⊗	⊗								
		M20		⊗	⊗	⊗								⊗	⊗	⊗							
		M25			⊗	⊗	⊗								⊗	⊗	⊗						
		M32				⊗	⊗	⊗								⊗	⊗	⊗					
		M40					⊗	⊗	⊗								⊗	⊗	⊗				
		M50						⊗	⊗	⊗								⊗	⊗	⊗			
		M63							⊗	⊗	⊗								⊗	⊗	⊗		
		M75								⊗	⊗	⊗								⊗	⊗	⊗	⊗
		M80									⊗	⊗									⊗	⊗	⊗
		M90										⊗	⊗									⊗	⊗
M100											⊗										⊗		
NPT	1/2"		⊗	⊗	⊗								⊗	⊗									
	3/4"			⊗	⊗	⊗								⊗	⊗								
	1"				⊗	⊗	⊗								⊗	⊗							
	1 1/4"					⊗	⊗	⊗								⊗	⊗						
	1 1/2"						⊗	⊗	⊗								⊗	⊗					
	2"							⊗	⊗	⊗	⊗							⊗	⊗				
	2 1/2"								⊗	⊗	⊗	⊗								⊗	⊗	⊗	
	3"									⊗	⊗	⊗									⊗	⊗	
	3 1/2"											⊗										⊗	
	4"																					⊗	

* PF Threads are available KGS Ex-proof certificate.

How to order

DAAD - M20 x N3/4"




II 2GD Ex db II C Ex eb II C Extb II C IP66 Baseefa08ATEX0019X IECEx BAS08.0008X
DAAD-NxxMxx xx(M)x xx(F) 2011/03 DONG-A Bucheon KR CE1180

REDUCER

Application

- Connection between cable entry devices and equipment having dis-similar threads.
- Male, Female threads : Metric to Metric, Metric to NPT, NPT to NPT, NPT to Metric
- Flameproof (Ex 'd') & Increased Safety (Ex 'e')
- Ingress Protection : IP66
- Operating Temperature : -60°C to +100°C
- Materials : Brass, Brass with Nickel plated, Aluminum & Stainless Steel 316(L)
- Certificate No : Baseefa08 ATEX 0019X / IECEx BAS08.0008X.
TR-CU : 0338518

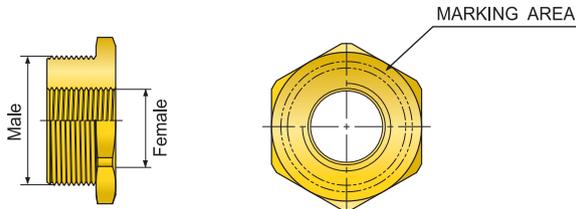

		Female Thread (*)																						
		METRIC										NPT												
		M16	M20	M25	M32	M40	M50	M63	M75	M80	M90	M100	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	3" 3/4"	4"		
METRIC	Male Thread (*)	M16																						
		M20	⊗																					
		M25	⊗	⊗																				
		M32	⊗	⊗	⊗																			
		M40	⊗	⊗	⊗	⊗																		
		M50	⊗	⊗	⊗	⊗	⊗																	
		M63	⊗	⊗	⊗	⊗	⊗	⊗																
		M75	⊗	⊗	⊗	⊗	⊗	⊗	⊗															
		M80	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗														
		M90	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗													
M100	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗														
NPT	Male Thread (*)	1/2"	⊗																					
		3/4"	⊗	⊗																				
		1"	⊗	⊗	⊗																			
		1 1/4"	⊗	⊗	⊗	⊗																		
		1 1/2"	⊗	⊗	⊗	⊗	⊗																	
		2"	⊗	⊗	⊗	⊗	⊗	⊗																
		2 1/2"	⊗	⊗	⊗	⊗	⊗	⊗	⊗															
		3"	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗														
		3 1/2"	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗													
		4"	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗												

* PF Threads are available KGS Ex-proof certificate.

How to order

DARE - M25 x N1/2"

- Female Thread
- Male Thread
- Dong-A Type Number



II 2GD Ex db II C Ex eb II C Extb II C IP66 Baseefa08ATEX0019X IECEx BAS08.0008X
DARE-NxxMxx xx(M)x xx(F) 2011/03 DONG-A Bucheon KR CE1180

HAZARDOUS AREA CABLE GLAND