HOL-TEC

Tectuprint has developed this equipment for the security sector, **HOL-TEC** with his hot head, allows applying holograms at registration with a variety of different sizes.

Its transfer capacity is highly valued in the field of personalization, making a high quality and variation of foils and holograms.

FEATURES

Traction format:from 4 to 24 inches

Change of format:.....program in decimas milimeter

Change of format,

longitudinal paper adjustment

and hologram adjustment:by electronic control

Maximum Printing area size:100 x 100 mm

Maximum hologram size:100 x 100 mm

Maximum Car pressure

contact force......790 Kg @ 6 Bar

Verier adjustment:.....planarity of the


printingtable and

transfer pressure

Temperature control: digital by microprocessor

PID technology

Transfer time:electronically programmable

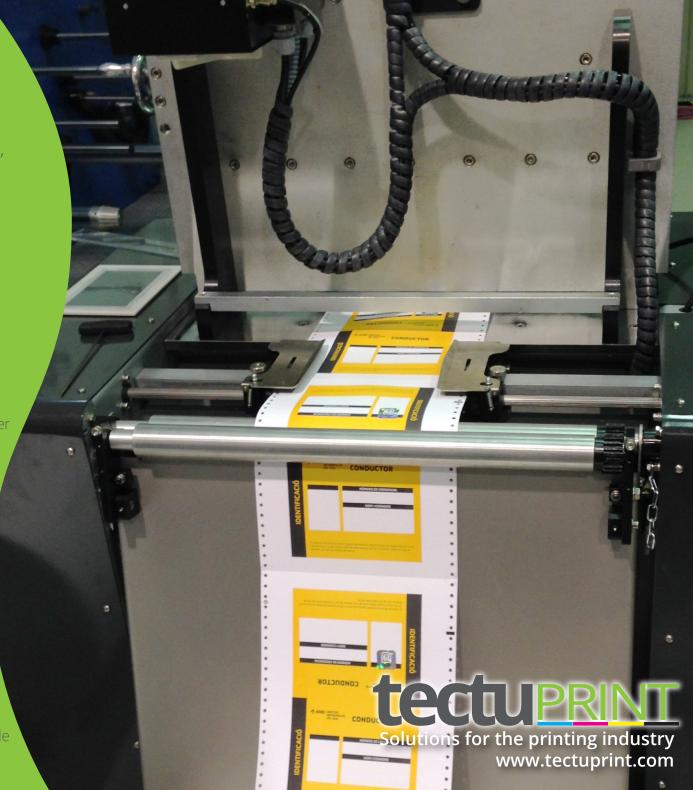

Photocell for:	.hologram adjustment
	Reading (optional)
Max speed:	.3600 stamps/hour
	(variable according
	to transfer time and
	format)
Compressed air:	.6 bars , 85 liters/min,
	3600 stamps/hour
Power supply:	.3X400V +N+T 50/60
	Hz , 2500VA
Machine dimensions:	.800 mm length, 1150
	mm width, 1500 mm
	height
Folder dimensions:	.length 1000 mm, width
	700 mm x height 1500
	mm
Total weight:	.approximately 480 kg



Solutions for the printing industry www.tectuprint.com

C/ Colom 453 nave C16 08223 Terrassa (Barcelona) (Spain) Phone (34) 937 221 664 · Fax (+34) 937 310 588 · info@tectuprint.com

