


# RT1

## DUAL TELESCOPIC RAMP



	32824x12/24
<b>A</b> Total width zone of fixed platform	1151 mm
<b>B</b> Total length zone of fixed	761 mm
<b>C</b> Total height of ramp	78 mm
<b>D</b> Total width of mobile platform	963 mm
<b>E</b> Useful width of mobile platform	814 mm
<b>F</b> Useful length of mobile platform	1050 mm
<b>I</b> Total width of fixed platform	1242 mm
<b>J</b> Total length of fixed platform	787 mm

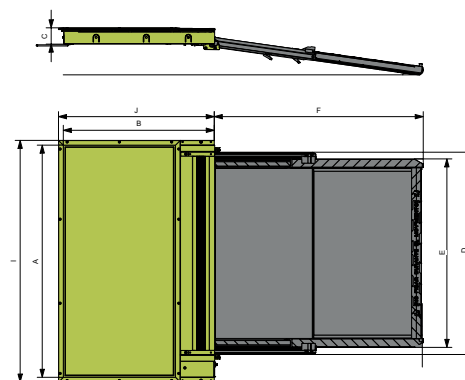

### DESCRIPTION

- Electric or manual working.
- Powered 12v / 24v
- Total weight: 30 Kg
- Load 300 Kg
- Compact ramp 1242 x 787 x 78 mm
- Unfolded platform of 1150 mm
- Easy maintenance.
- Vehicles intended for Class I, A.
- According to regulations UN R107

### BENEFITS

- Access to the mechanism from inside of the bus.
- Good adaptation with the floor of the bus.
- Dirt resistant.
- No step when entering.