



JEICO® is the name of industrial radio remote controller

Learn more at www.jeico.com or contact a jeico representative to get info.



JEICO®

J Building, 94-1, Choryang-ro, Dong-gu, Busan, 48805, Korea

Tel. +82-51-818-7727 | Fax. +82-51-804-2150 | Email: jeicorp@kita.net

WE MAKE REMOTE
THAT IS AWESOME



JEICO Technology is Global Technology

JEICO industrial radio remote controller being noticed at worldwide industrial sites.

A byword for **wireless remote control**
for industrial purposes!

JEICO is a leading manufacturer of industrial radio remote controllers that are used in a variety of industries, including hoist and crane operations, winches, gates, automobiles, and other lifting equipments.

We are dedicated to providing our customers with top-notch wireless remote control solutions that cater to the needs of both light and heavy industries.


Our cutting-edge technology is a result of our continuous focus on research and development, which has led to the launch of several new products and product lines. Our efforts in this regard have been recognized by the government, and we have been registered as a high-tech venture company. Our research institute is also registered and is actively working towards deeper research in the field.

With our unwavering commitment to innovation and product development, we are well-positioned to remain at the forefront of our industry.

Our radio controls have been widely recognized across various industries, and we have developed different products to cater to different applications, including those for workplace convenience and safety in industrial settings such as cranes and steel power plants. We are particularly proud of our work in developing radio controls for use in explosion-proof areas, which are certified as intrinsic safety products and the first of their kind in Korea.

We take great pride in our ability to develop all of our products in-house, from remote control programming to communication equipment. This ensures that our products are of the highest quality with minimal error rates. Our unwavering commitment to research and development enables us to stay at the forefront of technological advancements and product innovations. As a result, we have earned a reputation for producing reliable and high-performing products that exceed customer expectations.

At JEICO, we are committed to staying at the forefront of our industry. We have a strong focus on innovation and are determined to become a global leader in the field of industrial radio remote controllers.


CEO of JEICO



JEICO 3S Commitment

SPEEDY

Fast and intensive
clear service

Stands out with
cutting-edge technologies

SMART

SMILE

Service with big smile

Sales Performance



**PUBLIC
ENTERPRISE**



**HEAVY
INDUSTRY**



**EDUCATIONAL
INSTITUTION**



MILITARY



**PRIVATE
ENTERPRISE**



**OVERSEAS
COMPANY**

KNOC KOREA NATIONAL OIL CORPORATION

KAC GIMHAE KOREAN AIRCRAFT MANUFACTURING

Incheon Airport

HUmetro

Seoul Metro Cyber Station

BEKO

광주도시관리공사

한성시시설관리공단

KOGAS

THERMAL POWER PLANTS

- Hadong

- Boryeong

- Dangjin

- Taean Ulsan

DSME DAEWOO SHIPBUILDING & MARINE ENGINEERING CO., LTD.

HD HYUNDAI HEAVY INDUSTRIES

HYUNDAI HYPO BLOCK YARD

SAMSUNG SAMSUNG HEAVY INDUSTRIES

SAMSUNG CORNING

HANJIN

POSCO

HYUNDAI HYUNDAI STEEL

HYUNDAI

HYUNDAI

로노코리아자동차

SSANGYONG MOTOR

LG Chem

LG Display

HD HYUNDAI INFRACORE

LS ELECTRIC LS Metal

Isiswire

IS DONGSEO

ORIENTAL

UNIVERSITY

- Busan

- Joseon

HIGH SCHOOL

- Hoengseong

MIDDLE SCHOOL

- Ulsan

- Geumok

- Dongrae

ELEMENTARY SCHOOL

- Seoul oryu

ARMY

- Changwon

NAVY

- Jinhae

- Busan

AIR FORCE

- Suwon

KAI KOREA AEROSPACE INDUSTRIES, LTD.

MANN+HUMMEL

SM NAMSUN ALUMINUM

SIMPAC

OTIS

HYUNDAI ELEVATOR

MAMA

SAMPYO

SAMSUNG SDI

DONGAH

HRE&I

CHUNHA

USA Hanwha Advanced Materials

Poland HANKOOK

Hungary SK on

Russia SAMSUNG ELECTRONICS

Japan FUJITA

Indonesia POSCO

Vietnam POSCO

Vietnam SAMSUNG ELECTRONICS

Vietnam HYOSUNG

India POSCO

China ZPMC

Overseas Exhibition



**MALAYSIA
METALTECH**



**VIETNAM
MTA Vietnam**



**IRAN
Tehran International Industry Fair**



**INDIA
Engi Expo**



**INDONESIA
MIS**



**TURKEY
WIN EURASIA**



**JAPAN
Sea Japan**



**EUROPE
Trade mission**

Overseas market

EXPORT


USA, MEXICO, VIETNAM, INDONESIA, MALAYSIA, THAILAND, JAPAN, INDIA, EUROPE, RUSSIA, IRAN, TURKIYE

JEICO AGENT

INDIA, VIETNAM, INDONESIA, THAILAND




CONTENTS

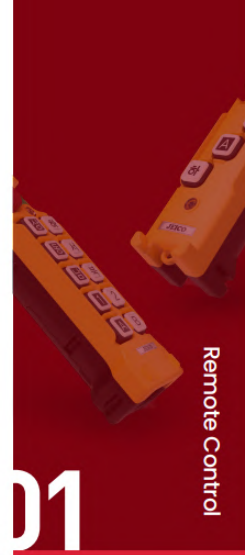

01

Remote Control


JREMO 3K	10
JREMO 6K	12
JREMO 6K+	14
JREMO 8K	16
JREMO 10K	18
JREMO 14K	20

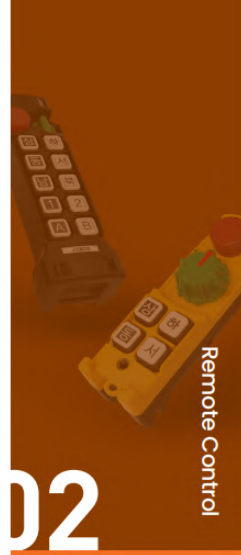

02

Remote Control


JREMO 4L	
JREMO 6L	
JREMO 10L	
JREMO 610	
JREMO 10EX	

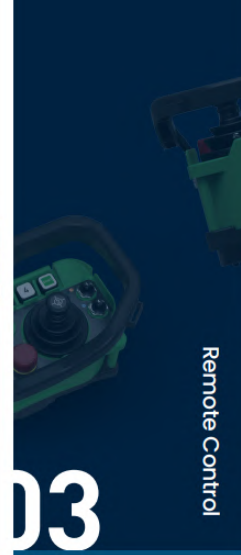

03

Remote Control

24	JREMO 60K (Type JJ)
26	JREMO 60K (Type FJ)
28	JREMO 60K (Type FF)
30	JREMO 60K SPECIFICATION
32	

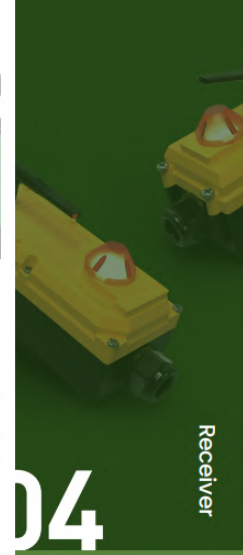

04

Receiver

36	JREMO RX1	46
38	JREMO RX2	46
40	JREMO RX3	46
42	JREMO RX4	47
	JREMO RX-EX	47

WE MAKE REMOTE THAT IS AWESOME

01

Remote Control **BASIC TYPE**



JREMO 3K




JREMO 6K




JREMO 6K+



JREMO 8K



JREMO 10K



JREMO 14K



REMOTE CONTROL

JREMO 3K

YOUR APPLICATION



Electric Chain Hoist



Industrial Gate & Door



Electric Winch



Industrial Elevator



Jelly Cover ver.




SPECIFICATION



Model	JREMO 3K
Type	3 Push button type
Power	2 X 1.5V Alkaline Batteries (LR6 AA Size)
Frequency Range	433Band : 433.050~434.775MHz (70 Channels) 429Band : 429.2500~429.7375MHz (40 Channels)
Casing	PA6+GF15%
Output	≤5mW
Size(Weight)	148 x 48 x 45mm (185g)
IP Grade	IP65(Transmitter), IP66(Receiver)

CLASSIFICATION

CLASSIFICATION BY BUTTON TYPE	
Model with Suffix	Push Button Type
JREMO 3K A, M	3 Single
JREMO 3K C	2 Double and 1 Single
BUTTON ARRANGEMENT	
WHITE : Single Button	RED : Double Button




TRANSMITTER / RECEIVER SET

- Cable included configuration.





SPECIFICATION




Model	JREMO 6K
Type	6 Push button type
Power	2 X 1.5V Alkaline Batteries (LR6 AA Size)
Frequency Range	433Band : 433.050~434.775MHz [70 Channels] 429Band : 429.2500~429.7375MHz [40 Channels]
Casing	PA6+GF15%
Output	≤5mW
Size(weight)	148 x 48 x 45mm [185gr]
IP Grade	IP65[Transmitter], IP66[Receiver]

CLASSIFICATION

CLASSIFICATION BY BUTTON TYPE	
Model with Suffix	Push Button Type
JREMO 6K A, M, G	6 Single
JREMO 6K B	4 or 6 Double
JREMO 6K C	2 Double + 4 Single

BUTTON ARRANGEMENT	
WHITE : Single Button	RED : Double Button



TRANSMITTER / RECEIVER SET

* Cable included configuration.



Jelly Cover ver.



JREMO 6K G type



YOUR APPLICATION



Shipyard Crane



Overhead Crane



Gantry Crane



Special Vehicle



YOUR APPLICATION



Shipyard Crane



Overhead Crane



Gantry Crane



Jelly Cover ver.



JREMO 6K+ G type



SPECIFICATION



Model	JREMO 6K+
Type	7 Push button type
Power	2 X 1.5V Alkaline Batteries (LR6 AA Size)
Frequency Range	433Band : 433.050~434.775MHz (70 Channels) 429Band : 429.2500~429.7375MHz (40 Channels)
Casing	PA6+GF15%
Output	≤5mW
Size(weight)	148 x 48 x 45mm (185g)
IP Grade	IP65[Transmitter], IP66[Receiver]

CLASSIFICATION

CLASSIFICATION BY BUTTON TYPE	
Model with Suffix	Push Button Type
JREMO 6K+ A, G	7 Single
JREMO 6K+ B	7 Double
JREMO 6K+ C	2 Double + 5 Single

BUTTON ARRANGEMENT	
WHITE : Single Button	RED : Double Button



A, G



B



C

TRANSMITTER / RECEIVER SET

- Cable included configuration.






SPECIFICATION



Model	JREMO 8K
Type	8 Push button type
Power	4 X 1.5V Alkaline Batteries (LR6 AA Size)
Frequency Range	433Band : 433.050~434.775MHz [70 Channels] 429Band : 429.2500~429.7375MHz [40 Channels]
Casing	PA6+GF15%
Output	≤5mW
Size(weight)	196 x 62 x 45 [395gr]
IP Grade	IP65[Transmitter], IP66[Receiver]

CLASSIFICATION

CLASSIFICATION BY BUTTON TYPE	
Model with Suffix	Push Button Type
JREMO 8K A, M	8 Single
JREMO 8K B	6 Double + 2 Single
JREMO 8K C	2 Double + 6 Single
JREMO 8K D	8 Double
BUTTON ARRANGEMENT	
WHITE : Single Button	RED : Double Button



TRANSMITTER / RECEIVER SET

• Cable included configuration.



Jelly Cover ver.



YOUR APPLICATION



Double Girder Gantry Crane



Double Girder Overhead Crane



Special Vehicle



REMOTE CONTROL

JREMO 10K

YOUR APPLICATION



Rubber Tyred
Gantry Crane



Ship Crane



Hydraulic Press



Tower Crane



Jelly Cover ver.

SPECIFICATION



Model	JREMO 10K
Type	10 Push button type
Power	4 X 1.5V Alkaline Batteries (LR6 AA Size)
Frequency Range	433Band : 433.050~434.775MHz (70 Channels) 429Band : 429.2500~429.7375MHz (40 Channels)
Casing	PA6+GF15%
Output	≤5mW
Size(Weight)	196 x 62 x 45 [395gr]
IP Grade	IP65(Transmitter), IP66(Receiver)

CLASSIFICATION

CLASSIFICATION BY BUTTON TYPE	
Model with Suffix	Push Button Type
JREMO 10K A, M	10 Single
JREMO 10K B	6 Double + 4 Single
JREMO 10K C	2 Double + 8 Single
JREMO 10K D	10 Double

BUTTON ARRANGEMENT	
WHITE : Single Button	RED : Double Button
A, M	B
C	D


TRANSMITTER / RECEIVER SET

- Cable included configuration.





SPECIFICATION




Model	JREMO 14K
Type	14 Push button type
Power	4 X 1.5V Alkaline Batteries (LR6 AA Size)
Frequency Range	433Band : 433.050-434.775MHz (70 Channels) 429Band : 429.2500-429.7375MHz (40 Channels)
Casing	PA6+GF15%
Output	≤5mW
Size(weight)	240 x 62 x 45mm (450gr)
IP Grade	IP65(Transmitter), IP66(Receiver)

CLASSIFICATION

CLASSIFICATION BY BUTTON TYPE	
Model with Suffix	Push Button Type
JREMO 14K A, M	14 Single
JREMO 14K B	6 Double + 8 Single
JREMO 14K C	2 Double + 12 Single
JREMO 14K D	12 Double + 2 Single

BUTTON ARRANGEMENT	
WHITE : Single Button	RED : Double Button



TRANSMITTER / RECEIVER SET

• Cable included configuration.



YOUR APPLICATION



Rubber Tyred
Gantry Crane



Special Vehicle



Hydraulic Press



Tower Crane

WE MAKE REMOTE THAT IS AWESOME

Remote Control **SPECIAL TYPE & EXPLOSIVE PROOF**

02



JREMO 4L



JREMO 6L



JREMO 10L



JREMO 610



JREMO 10EX



VOLUME CONTROL



YOUR APPLICATION



Ladder Truck



Smart Farm



Jelly Cover ver.



SPECIFICATION



Model	JREMO 4L
Type	4 Push button with volume type
Power	3.7V Li-Polymer (1500mAh) C-Type Rechargeable
Volume Control	0-5V, 0-10V, 4-20mA
Communication	P.L.L or CAN
Frequency Range	433Band : 433.050-434.775MHz (70 Channels) 429Band : 429.2500-429.7375MHz (40 Channels)
Casing	PA6+GF15%
Output	≤5mW
Size(weight)	148 x 48 x 45mm (205gr)
IP Grade	IP65(Transmitter), IP66(Receiver)

CLASSIFICATION

CLASSIFICATION BY BUTTON TYPE	
Model with Suffix	Push Button Type
JREMO 4L A, M	4 Single
BUTTON ARRANGEMENT	
WHITE : Single Button	RED : Double Button



TRANSMITTER / RECEIVER SET

- Cable included configuration.





SPECIFICATION



Model	JREMO 6L
Type	6 Push button with volume type
Power	3.7V Li-Polymer (1500mAh) C-Type Rechargeable
Volume Control	0-5V, 0-10V, 4-20mA
Communication	P.L.L or CAN
Frequency Range	433Band : 433.050-434.775MHz (70 Channels) 429Band : 429.2500-429.7375MHz (40 Channels)
Casing	PA6+GF15%
Output	≤5mW
Size(weight)	170 x 48 x 45mm (250gr)
IP Grade	IP65(Transmitter), IP66(Receiver)

CLASSIFICATION

CLASSIFICATION BY BUTTON TYPE

Model with Suffix	Push Button Type
JREMO 6L A, M	6 Single
JREMO 6L B	6 Double
JREMO 6L C	2 Double + 4 Single

BUTTON ARRANGEMENT

WHITE : Single Button

RED : Double Button



A, M



B



C

TRANSMITTER / RECEIVER SET

- Cable included configuration.



Jelly Cover ver.



YOUR APPLICATION



Ladder Truck



Smart Farm

VOLUME CONTROL





VOLUME CONTROL



YOUR APPLICATION



Jelly Cover ver.



SPECIFICATION



Model	JREMO 10L
Type	10 Push button with volume type
Power	4 X 1.5V Alkaline Batteries (LR6 AA Size)
Volume Control	0-5V, 0-10V, 4-20mA
Communication	P.L.L or CAN
Frequency Range	433Band : 433.050-434.775MHz (70 Channels) 429Band : 429.2500-429.7375MHz (40 Channels)
Casing	PA6+GF15%
Output	≤5mW
Size(weight)	196 x 62 x 45mm (395gr)
IP Grade	IP65(Transmitter), IP66(Receiver)

CLASSIFICATION

CLASSIFICATION BY BUTTON TYPE	
Model with Suffix	Push Button Type
JREMO 10L A, M	10 Single
JREMO 10L B	6 Double + 4 Single
JREMO 10L C	2 Double + 8 Single
BUTTON ARRANGEMENT	
WHITE : Single Button	RED : Double Button



A, M



B



C

TRANSMITTER / RECEIVER SET

• Cable included configuration.





SPECIFICATION




Model	JREMO 610
Type	10 Push button type
Power	3.7V Li-Polymer (1500mAh) C-Type Rechargeable
Frequency Range	433Band : 433.050~434.775MHz (70 Channels) 429Band : 429.2500~429.7375MHz (40 Channels)
Casing	PA6+GF15%
Output	≤5mW
Size(weight)	170 x 48 x 45mm (250gr)
IP Grade	IP65[Transmitter], IP66[Receiver]

CLASSIFICATION

CLASSIFICATION BY BUTTON TYPE	
Model with Suffix	Push Button Type
JREMO 610 A, M	10 Single
JREMO 610 B	6 Double + 4 Single
JREMO 610 C	2 Double + 8 Single
JREMO 610 D	10 Double

BUTTON ARRANGEMENT	
WHITE : Single Button	RED : Double Button



TRANSMITTER / RECEIVER SET

- Cable included configuration.



Jelly Cover ver.



Basic type / Magnet type



YOUR APPLICATION



Shipyard Crane



Overhead Crane



Tower Crane



REMOTE CONTROL

JREMO 10EX



HAZARDOUS AREA
(Explosive proof)



Jelly Cover ver.

SPECIFICATION



Model	JREMO 10EX
Type	10 Push button type
Power	4 X 1.5V Alkaline Batteries (LR6 AA Size)
Frequency Range	433Band : 433.050~434.775MHz (70 Channels)
Casing	ANTISTATIC ABS
Output	≤5mW
Size(weight)	169 x 62 x 45mm [395gr]
IP Grade	IP65(Transmitter), IP66(Receiver)
EX Marking	Ex ib IIC T4(Transmitter) Ex d IIC T6 , Ex tD A21 T85°C(Receiver)


CLASSIFICATION

CLASSIFICATION BY BUTTON TYPE	
Model with Suffix	Push Button Type
JREMO 10EX A	10 Single
JREMO 10EX B	6 Double + 4 Single
JREMO 10EX C	2 Double + 8 Single


BUTTON ARRANGEMENT	
WHITE : Single Button	RED : Double Button



A



B



C

TRANSMITTER / RECEIVER SET



WE MAKE REMOTE THAT IS AWESOME

Remote Control JOYSTICK TYPE

03

JREMO 60K

Type JJ (Joystick)




JREMO 60K

Type FJ (Mixed)



JREMO 60K

Type FF (Fingertip)



REMOTE CONTROL

JREMO 60K

TYPE JJ (JOYSTICK)



REMOTE CONTROL JOYSTICK TYPE | JREMO 60K

REMOTE CONTROL

JREMO 60K

TYPE **FJ** (MIXED)



REMOTE CONTROL

JREMO 60K

TYPE **FF** (FINGERTIP)






JREMO 60K

JREMO 60K			
TYPE JJ		TYPE FJ	TYPE FF
Model	JREMO 60K	Casing	PA6+GF15%
Type	JJ (Joystick Type)	Output	≤5mW
	FJ (Mixed Type)	Components	Armrest, Anti-Impact Rubber, Fixed Belt
	FF (Fingertip Type)	Size(weight)	244 x 146 x 145mm (1,200gr)
Power	4 X 1.5V Alkaline Batteries (LR6 AA Size) or 4 X Ni-MH Rechargeable Batteries		
IP Grade	IP65[Transmitter], IP66[Receiver]		
Frequency Range	433Band : 433.050-434.775MHz [70 Channels]		
	429Band : 429.2500-429.7375MHz [40 Channels]		

PARTS INTRODUCTION

- A Joystick Lever
- B Fingertip Lever
- C Toggle Switch
- D Arm Rest
- E Push Button
- F Emergency Button
- G On/Off key



↑ JREMO 60K-FJ

FINGERTIP LEVER

	SELF-RETURN	LOCKER	SLIDING	TOGGLE
				
Type	Red: Self-Return		Communication	Analog or PWM
	Blue: Locker		Temperature	-30°C ~ +75°C
	Green: Sliding		Size(weight)	44 x 28 x 57mm
	Gray: Toggle		IP Grade	IP54
Lever Operation	0-5V , 0-10V or 4-20mA		Lever Angle	± 30° max. (Toggle and Sliding) ± 35° max. (Self-Return and :Locker)

JOYSTIC LEVER

Type	Cross plate
	Universal plate
Step	Max 5-step

TOGGLE SWITCH

Type	2-step toggle switch
	3-step toggle switch


WE MAKE REMOTE THAT IS AWESOME

04


RECEIVER TYPE



JREMO RX1



JREMO RX2



JREMO RX3



JREMO RX4




JREMO RX-EX

JREMO RX 1




Model	JREMO RX 1
Type	Main lamp indicator with Embedded Antenna
Application	JREMO 6K G type only
Power	AC: 110~220V
Casing	PA6+GF15%+Flame Retardant
Cable Type	12 Core Cable
Size(weight)	88 x 108 x 105mm (650gr)
IP Grade	IP66



JREMO RX 2




Model	JREMO RX 2
Type	Main lamp indicator with External Antenna
Application	Basic : JREMO 3K, 6K, 6K+, 8K, 10K Speical : JREMO 4L
Power	AC: 110~440V free / DC: 12~60V free
Casing	PA6+GF15%+Flame Retardant
Cable Type	12, 16, 18 Core Cable
Size(weight)	88 x 152 x 105mm (950gr)
IP Grade	IP66



JREMO RX 3




Model	JREMO RX 3
Type	Main lamp indicator with External Antenna
Application	Basic : JREMO 6K+, 8K, 10K, 14K Speical : JREMO 6L, 10L, 10EX, 610
Power	AC: 110~440V free / DC: 12~60V free
Casing	PA6+GF15%+Flame Retardant
Cable Type	16, 18, 24 Core Cable
Size(weight)	88 x 215 x 102mm (1,350gr)
IP Grade	IP66



JREMO RX 4




Model	JREMO RX 4
Type	Main lamp indicator with External Antenna
Application	Basic : JREMO 14K Joystic : JREMO 60K
Power	AC: 110~220V / DC: 12~60V
Casing	PA6+GF15%+Flame Retardant
Cable Type	24, 32 Core Cable
Size(weight)	171 x 215 x 102mm (2,300gr)
IP Grade	IP66



JREMO RX-EX



Model	JREMO RX-EX
Type	RX-EX (Explosion-proof Box with patented antenna)
Application	JREMO 10EX type only
Power	AC: 110~220V
Casing	Cast Aluminium Alloy
Size(weight)	260 x 275 x 102mm (7,800gr)
Ex Grade	Ex d IIC T4 Ex tD A21 T85°C

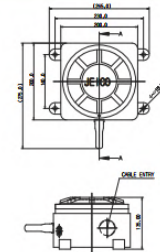

JREMO RX 4

JREMO RX-EX

JREMO RX 1

JREMO RX 3

JREMO RX 2

TRANSMITTER



RECEIVER



WHAT WE HAVE MORE? (OPTIONAL)



FULL LEATHER COVER

- Maximise durability
- protect against contamination.



JELLY COVER

- Optimal grab & Shock absorbing
- Premium design



BASIC COVER

- Simple and easy removal design



RAIN COVER

- Rainproof cover for special outdoor areas



JEICO PROGRAM

- Total Product Management



EXTENDED ANTENNA

- Magnet SMA type (4.5m)



RECHARGEABLE KITS

- Ni-MH rechargeable battery (2000mAh) and charger



HAND / NECK STRAP

- Size : S(25cm), M(50cm), L(70cm)



A byword for
wireless remote control
for industrial purpose!

WE MAKE REMOTE THAT IS AWESOME

JEICO®

JEICO aims to become a leading global enterprise in the industrial remote controller market by delivering top-quality products, innovative technology, and exceptional customer service. We are committed to upholding the highest standards of quality and service and building strong partnerships within the industry to ensure our success.

