

Engineering
GREAT
Solutions

Product overview

+49 (0) 1802 28 72 45 678

www.imi-precision.com

Contents

1		DIRECT ACTING SOLENOID VALVES	12	FAST FIND GUIDE
2		INDIRECT ACTING SOLENOID VALVES	50	FAST FIND GUIDE
3		PRESSURE OPERATED VALVES BY EXTERNAL FLUID	68	FAST FIND GUIDE
4		PULSE VALVES AND CONTROLS FOR DUST COLLECTOR SYSTEMS	90	FAST FIND GUIDE
5		PROPORTIONAL VALVES	104	FAST FIND GUIDE
6		HIGH PRESSURE CONTROL	110	FAST FIND GUIDE

Our dedicated team of experts is on hand with technical advice, support and recommendations to help you get the most effective products, in the shortest timescales, and with the best possible service.



The IMI Buschjost product brand

Successful in the market for over 85 years, the IMI Buschjost product brand is a market leading range of process and multimedia valve technology and system solutions for liquid and gaseous media.

IMI Buschjost

Products range from solenoid and control valves to pressure-actuated angle-seat valves to specialised customer-specific solutions.

- > Solenoid valves without differential pressure
- > Solenoid valves with differential pressure
- > Pressure actuated valves by external fluid
- > Pulse valves and controls for dust collector systems
- > Proportional valves

With comprehensive knowledge of relevant industry standards and certifications, IMI Buschjost valves can be found in various applications, including mechanical and plant engineering, the automotive industry and in the field of power generation and environmental protection.


Engineering
GREAT Solutions



Our global reach

With established manufacturing facilities globally, we have the capability to cope with the most demanding of international projects. With a sales and service network in 50 countries, we have the reach and capability to ensure continuity of supply and local support where it is needed.

Engineering
GREAT Solutions

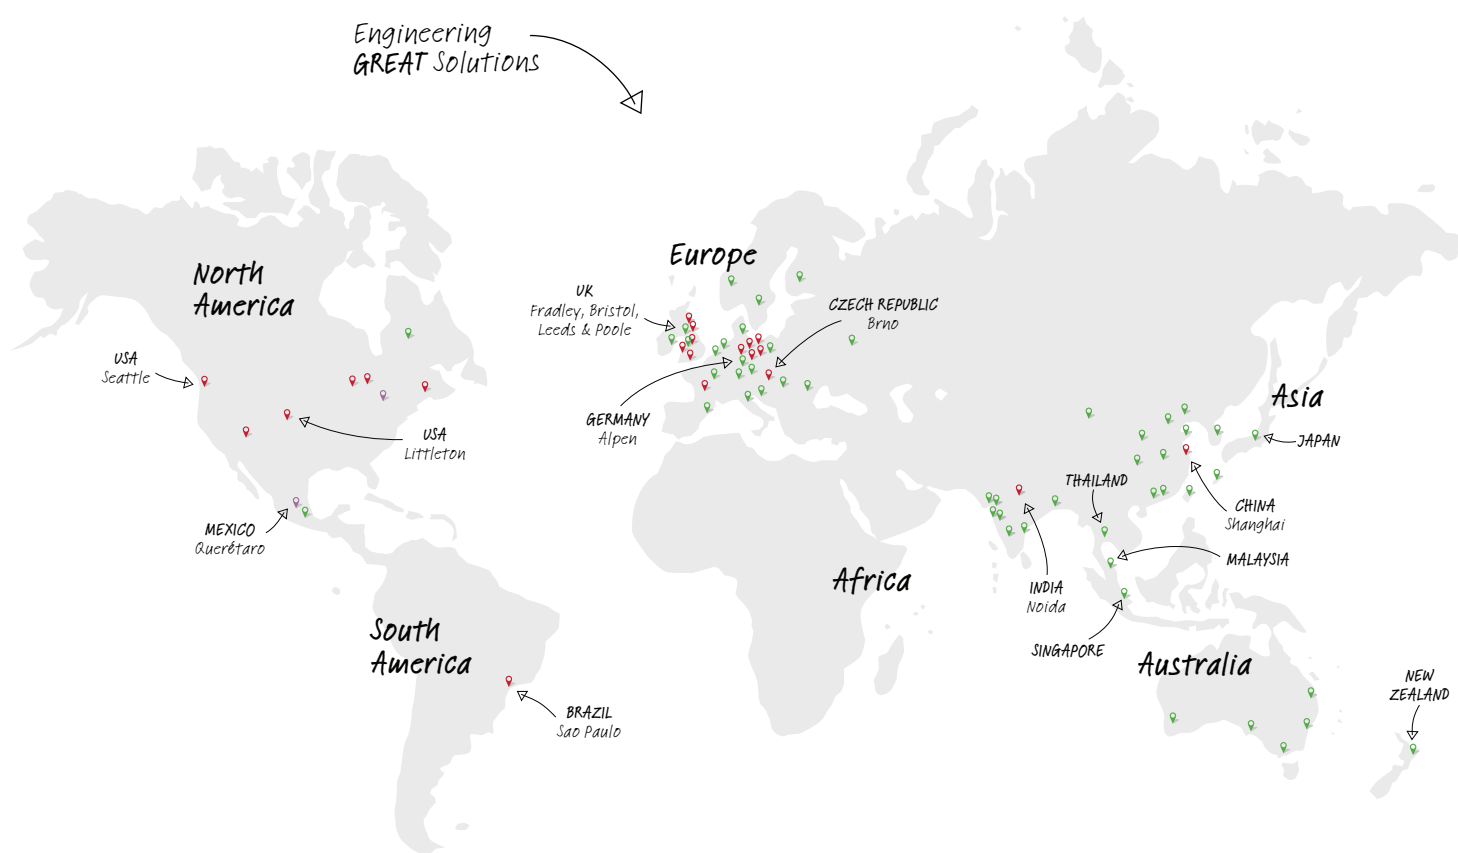

Sales & Service in 50 countries

- 📍 IMI Precision Engineering sales, manufacturing and technical centres
- 📍 IMI Precision Engineering sales locations
- 📍 IMI Precision Engineering manufacturing locations



Engineering GREAT solutions

*We deliver **GREAT** solutions for our customers tackling the world's most demanding engineering challenges*

IMI Precision Engineering is a world leader in motion and fluid control technologies. Wherever precision, speed and engineering reliability are essential, we deliver exceptional solutions which improve the productivity and efficiency of our customers' equipment.

Part of IMI plc, we have a sales and service network in 50 countries, as well as manufacturing capability in the USA, Germany, China, UK, Switzerland, Czech Republic, Mexico and Brazil. We support this with our global centres of technical excellence, and facilities for CFD design and R&D testing. We employ a dedicated team of field engineers, sector specialists and key account managers – all committed to providing excellent service to our customers.

As a business, we aim to **UNDERSTAND** our customers' challenges. We then **CONNECT** our products, people and expertise in order to **DELIVER** exceptional service and solutions. These **IMPROVE** the performance of our customers' machinery.

We call this Engineering GREAT, and we deliver it to customers through a world-class portfolio of high performance products, through close partnerships and problem-solving, and through a global network of support which ensures reliable local delivery, all over the world.



We get closer to our customers to understand their exact challenges



How we deliver value to our customers

Partnerships & problem solving

We have a global team of key account managers and over 400 highly experienced engineers – many with in-depth expertise of key industry sectors.

We recruit and develop the industry's top talent, offering the best training and exposure to world-class products and technologies with some of the world's leading businesses. The deep and combined experience this gives us means we have the skills, confidence and know-how to get closer to our customers, enabling us to understand their exact challenges and resolve them **precisely**.

Because of this our problem-solving is more effective, our solutions more targeted, our partnerships more productive.

High performance products

Our world-class products improve performance and productivity.

We have global manufacturing capability and technical centres of excellence, each dedicated to developing and rigorously testing new high performance products to meet **precise** industry and application needs. Helping improve performance and reduce downtime and energy consumption on production lines across the world, our world-class portfolio includes IMI Norgren, IMI Buschjost, IMI FAS, IMI Herion and IMI Maxseal. Having proven their value over years, they stand amongst the most trusted names in fluid and motion control. We are continuously adding to this portfolio through a programme of innovation and new product development.

Because of this, we're able help our customers solve the world's greatest engineering challenges – reliably, safely and efficiently.

Reliability

We deliver and support our high quality products through our global service network.

We have world-class manufacturing and sales and service operations in 50 countries, supported by investment in robust project management systems and lean localised production. Together, with our integrated supply chain, and the speed of our Express service we have the systems, processes and support to deliver quality products and aftersales service **precisely**, reliably, in full and on time, anywhere.

Pressure Equipment Directive (PED)

The Pressure Equipment Directive (PED) is generally applicable to equipment with a working pressure greater than 0.5 bar. Valves as components of this equipment come under the scope of the directive. However, only valves above a certain nominal size are required to bear CE markings.

Valves suitable for different (e.g. neutral, toxic or flammable) fluids only require CED markings above a nominal size of DN 25. Smaller valves must not bear a CE mark in accordance with the Pressure Equipment Directive. This equipment must be designed in line with standard engineering practice so that it meets the requirements of the directive.

Almost all of the valves over DN 25 in size requiring marking should be assigned to Categories I and II. This means their design and testing is in the responsibility of the manufacturer, i.e. Norgren Buschjost in the case. Module A1 has been chosen as the related method of evaluating conformity and certified by the „nominated body“ (TÜV Nord).

The products are also subject to other EU Directives such as EMC, Low Voltage, etc. The products bear a CE mark as a declaration of conformity with all of these. Where applicable (sizes > DN 25) this mark also serves as a declaration of conformity with the Pressure Equipment Directive. Category II valves are also marked with the identification number of the nominated body; CE 0045 for TÜV Nord.

PED 1 Applies to the following series: 82080, 82510, 82530, 82560, 82610, 82880, 82960, 83150, 83320, 83670, 83920, 84070, 84660, 84680

Note to Pressure Equipment Directive (PED):

The valves of this series are according to Art. 4 § 3 of the Pressure Equipment Directive (PED) 2014/68/EU. This means interpretation and production are in accordance to engineers practice wellknown in the member countries. The CE-sign at the valve does not refer to the PED. Thus the declaration of conformity is not longer applicable for this directive.

Note to Electromagnetic Compatibility Guideline (EEC):

The valves shall be provided with an electrical circuit which ensures the limits of the harmonised standards EN 61000-6-3

and EN 61000-6-1 are observed, and hence the requirements of the Electromagnetic Compatibility Guideline (2014/30/EU) satisfied.

Note to EAC marking:

The EAC-marked products comply with the applicable requirements stated in the technical regulations of the Eurasian Economic Union.

PED 2 Applies to the following series: 82710, 82870, 82900, 83300, 83640, 83930, 84180, 84190

Note to Pressure Equipment Directive (PED):

The valves of this series are according to Art. 4 § 3 of the Pressure Equipment Directive (PED) 2014/68/EU. This means interpretation and production are in accordance to engineers practice well-known in the member countries.

A certificate of conformity is not designated.

Note to EAC marking:

The EAC-marked products comply with the applicable requirements stated in the technical regulations of the Eurasian Economic Union.

PED 3 Applies to the following series: 82170, 82180, 82280, 82380, 82400, 82470, 82480, 82540, 82590, 82730, 83030, 83040, 83250, 83350, 83380, 83390, 84360, 84500, 84520, 84580, 84720, 84740, 85340, 85360, 85380, 85540, 85580, 85660, 85740, 85780, 86500, 86520, 86540, 86700, 86720

Note to Pressure Equipment Directive (PED):

The valves of this series up to and including DN 25 (G1) are according to Art. 4 § 3 of the Pressure Equipment Directive (PED) 2014/68/EU. This means interpretation and production are in accordance to engineers practice wellknown in the member countries. The CE-sign at the valve does not refer to the PED. Thus the declaration of conformity is not longer applicable for this directive.

For valves > DN 25 (G1) Art. 4 § (1) Letter d) applies:

The basic requirements of the Enclosure I of the PED must be fulfilled. The CE-sign at the valve includes the PED. A certificate of conformity of this directive will be available on request.

Note to Electromagnetic Compatibility Guideline (EEC):

The valves shall be provided with an electrical circuit which ensures the limits of the harmonised standards EN 61000-6-3 and EN 61000-6-1 are observed, and hence the requirements of the Electromagnetic Compatibility Guideline (2014/30/EU) satisfied.

Note to EAC marking:

The EAC-marked products comply with the applicable requirements stated in the technical regulations of the Eurasian Economic Union.

PED 4 Applies to the following series: 82090, 82580**Note to Pressure Equipment Directive (PED):**

The valves of this series up to and including DN 25 (G1) are according to Art. 4 § 3 of the Pressure Equipment Directive (PED) 2014/68/EU. This means interpretation and production are in accordance to engineers practice wellknown in the member countries.

The available CE labelling relates to the (Gas appliances) Regulation (EU) 2016/426 and applies to all nominal diameters. A copy of the prototype test certificate is provided with the product. For valves > DN 25 (G1), the available CE labelling includes the PED.

Note to Electromagnetic Compatibility Guideline (EEC):

The valves shall be provided with an electrical circuit which ensures the limits of the harmonised standards EN 61000-6-3 and EN 61000-6-1 are observed, and hence the requirements of the Electromagnetic Compatibility Guideline (2014/30/EU) satisfied.

Note to EAC marking:

The EAC-marked products comply with the applicable requirements stated in the technical regulations of the Eurasian Economic Union.

PED 5 Applies to the following series: 85840, 85780**Note to Pressure Equipment Directive (PED):**

The valves of this series up to and including DN 25 (G1) are according to Art. 4 § 3 of the Pressure Equipment Directive (PED) 2014/68/EU. This means interpretation and production are in accordance to engineers practice wellknown in the member countries. The CE-sign at the valve does not refer to the PED. Thus the declaration of conformity is not longer applicable for this directive.

For valves > DN 25 (G1) Art. 4 § (1) Letter d) applies:

The basic requirements of the Enclosure I of the PED must be fulfilled. The CE-sign at the valve includes the PED. A certificate of conformity of this directive will be available on request.

Note to Electromagnetic Compatibility Guideline (EEC):

The valves shall be provided with an electrical circuit which ensures the limits of the harmonised standards EN 61000-6-3 and EN 61000-6-1 are observed, and hence the requirements of the Electromagnetic Compatibility Guideline (2014/30/EU) satisfied.

Functional safety according to DIN EN 61508 (VDE0803) SIL:

Suitable for certain applications can only be evaluated through examination of each safety-related overall system with regard to the requirements of IEC 61508 / 61511.

Note to EAC marking:

The EAC-marked products comply with the applicable requirements stated in the technical regulations of the Eurasian Economic Union.

PED 6 Applies to the following series: 82160**Note to Pressure Equipment Directive (PED):**

The valves of this series up to and including DN 25 (G1) are according to Art. 4 § 3 of the Pressure Equipment Directive (PED) 2014/68/EU. This means interpretation and production are in accordance to engineers practice wellknown in the member countries. A certificate of conformity is not designated.

For valves > DN 25 (G1) Art. 4 § (1) Letter d) applies:

The basic requirements of the Enclosure I of the PED must be

fulfilled. The CE-sign at the valve refers to the PED. A certificate of conformity of this directive will be available on request.

Note to EAC marking:

The EAC-marked products comply with the applicable requirements stated in the technical regulations of the Eurasian Economic Union.

PED 7 Applies to the following series: 86480**For valves > DN 25 (G1) Art. 4 § (1) Letter d) applies:**

The basic requirements of the Enclosure I of the PED must be fulfilled. The CE-sign at the valve includes the PED. A certificate of conformity of this directive will be available on request.


Note to Electromagnetic Compatibility Guideline (EEC):

The valves shall be provided with an electrical circuit which ensures the limits of the harmonised standards EN 61000-6-3 and EN 61000-6-1 are observed, and hence the requirements of the Electromagnetic Compatibility Guideline (2014/30/EU) satisfied.

Note to EAC marking:

The EAC-marked products comply with the applicable requirements stated in the technical regulations of the Eurasian Economic Union.

Order-No.

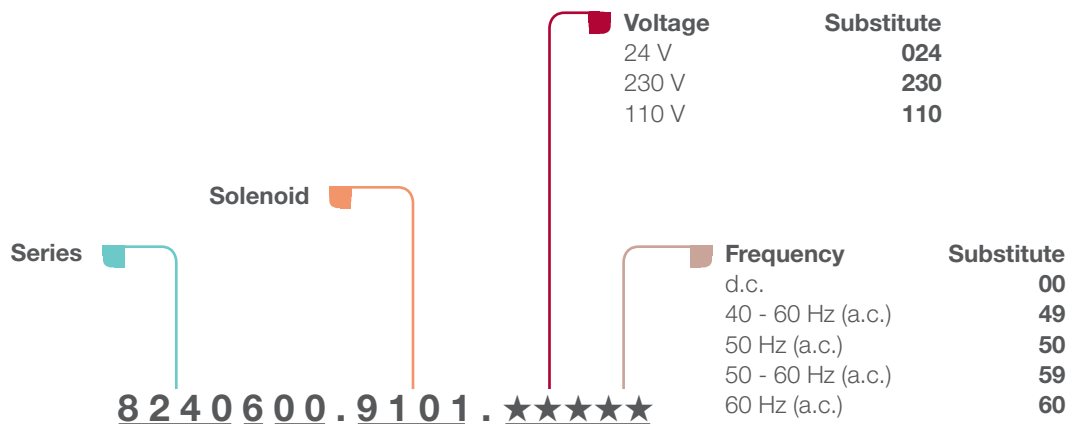

Thread size / Nominal diameter

Thread	DIN	Flange	Substitute
G1/4	8		0
G3/8	10		1
G1/2	12	15	2
G3/4	20	20	3
G1	25	25	4
G1 1/4	32	32	5
G1 1/2	40	40	6
G2	50	50	7
		65	8
		80	9
		100	10

Additional equipment

Standard	00
Normally open (NO)	01
Manual override	02
FPM seals	03
PTFE seals	06
EPDM seals	14
Higher Operating pressure	22
FPM seals for higher viscosity and other...	25
Additional equipment, applicable for all series, but not available in every series.	01 ... 49

Catalogue numbers of the special valves
Beginning with 849★★★★.XXXX.XXXXX
and 859★★★★.XXXX.XXXXX
the ★★★★★-block is numbered consecutively.

Additional equipment, only applicable for one series. **50 ... 99**

- Series
- Solenoid
- Voltage
- Frequency
- Thread size / Nominal diameter
- Additional equipment

Direct acting solenoid valves

PRODUCTS

12	Fast Find Guide	
13	2/2-way valves DN 3 ... 8, with sealed core tube / medium separated	82080
14	2/2-way valves DN 8 ... 25, with DVGW-approval, EN 161	82090
15	2/2-way valves DN 1,5 ... 5, small, compact, up to 70 bar (1015 psi), brass	82510
17	2/2-way valves DN 10, port size G1/4 ... 1/2, brass	82530
18	2/2-way valves DN 8 ... 50, diaphragm valve, brass	82540
20	2/2-way valves DN 10, port size G1/4 ... 1/2, stainless steel	82560
21	2/2-way valves DN 8 ... 50, diaphragm valve, stainless steel	82590
23	2/2-way valves DN 1,5 ... 5, small, compact, up to 70 bar (1015 psi), stainless steel	82610
25	2/2-way valves DN 15 ... 50, diaphragm valve, flange connection	83040
27	2/2-way valves DN 2,5 ... 4,5, with compression fitting	83150
28	2/2-way valves DN 8 ... 50, diaphragm valve up to +150°C (+302°F)	84360
29	2/2-way valves DN 15 ... 50, piston valve, backpressure tight	85340
31	2/2-way valves DN 15 ... 100, piston valve with SIL-certificat, flange connection	85780
33	2/2-way valves DN 8 ... 50, piston valve with SIL-certificat, female thread	85840
35	2/2-way valves DN 65 ... 100, piston valve, spheroidal graphite iron, flange connection	86480
36	2/2-way valves DN 15 ... 50, piston valve, flange connection, cast steel	86500
38	2/2-way valves DN 15 ... 50, piston valve up to +200°C (+392°F), flange connection	86520
39	2/2-way valves DN 15 ... 100, piston valve, stainless steel, flange connection	86540
41	2/2-way valves DN 15 ... 50, piston valve, stainless steel, with inspection certificate DIN EN 10204 - 3.1 Requirements AD 2000 A4	86580
43	2/2-way valves DN 8 ... 50, piston valve, brass, female thread	86700
45	2/2-way valves DN 8 ... 50, piston valve up to +200°C (+392°F), brass, female thread	86720
46	2/2-way valves DN 8 ... 50, piston valve, female thread	86740

Fast Find Guide

2/2-way valves

82080

DN 3 ... 8
Directly solenoid actuated, with sealed core tube / medium separated



Page 13

82090

DN 8 ... 25
Solenoid actuated, with forced lifting, with DVGW-approval, EN 161



Page 14

82510

DN 1,5 ... 5
Directly solenoid actuated, small, compact, up to 40 bar (520 psi), brass



Page 15

82530

DN 10
Solenoid actuated, with forced lifting, G1/4 ... 1/2, brass



Page 17

82540

DN 8 ... 50
Solenoid actuated, with forced lifting, diaphragm valve, brass



Page 18

82560

DN 10
Solenoid actuated, with forced lifting, G1/4 ... 1/2, stainless steel



Page 20

82590

DN 8 ... 50
Solenoid actuated, with forced lifting, diaphragm valve, stainless steel



Page 21

82610

DN 1,5 ... 5
Directly solenoid actuated, small, compact, up to 40 bar (520 psi), stainless steel



Page 23

83040

DN 15 ... 50
Solenoid actuated, with forced lifting, diaphragm valve, flange



Page 25

83150

DN 2,5 ... 4,5
Directly solenoid actuated, with compression fitting



Page 27

84360

DN 8 ... 50
Solenoid actuated, with forced lifting, diaphragm valve up to +150°C (+302°F)



Page 28

85340

DN 15 ... 50
Solenoid actuated, with forced lifting, piston valve, backpressure tight



Page 29

85780

DN 15 ... 100
Solenoid actuated, with forced lifting, piston valve, with inspection certificate DIN EN 10204 - 3.1, Flange



Page 31

85840

DN 12 ... 50
Solenoid actuated, with forced lifting, piston valve, with SIL-certificate, female thread



Page 33

86480

DN 65 ... 100
Solenoid actuated, with forced lifting, piston valve, ductile graphite iron



Page 35

86500

DN 8 ... 50
Solenoid actuated, with forced lifting, piston valve, female thread



Page 36

86520

DN 15 ... 50
Solenoid actuated, with forced lifting, piston valve up to +200°C (+392°F)



Page 38

86540

DN 15 ... 50
Solenoid actuated, with forced lifting, piston valve, stainless steel



Page 39

86580

DN 15 ... 50
Solenoid actuated, with forced lifting, piston valve, stainless steel, with SIL-certificate



Page 41

86700

DN 8 ... 50
Solenoid actuated, with forced lifting, brass



Page 43

86720

DN 8 ... 50
Solenoid actuated, with forced lifting, up to +200°C (+392°F), brass



Page 45

86740

DN 8 ... 50
Solenoid actuated, with forced lifting, up to +200°C (+392°F), brass



Page 46

82080

2/2-way valves with sealed core tube / medium separated – Direct solenoid actuated

Port size: G1/4 ... 3/8


Orifice: DN 3 ... 8

Core tube protected with PTFE-bellow

Suitable for aggressive fluids

Compact solenoid with integrated core tube

Unsusceptible to calcification and solenoidization of foreign particles



Technical data

Medium:

Aggressive gases and fluids

Switching function:

Normally closed

Operation:

Direct solenoid actuated

Model:

Seat valve operating without differential pressure

Mounting position:

Optional, preferably solenoid vertical on top

Flow direction:

Determined

Port size:

G1/4, G3/8

Operating pressure:

0 ... 7 bar (0 ... 101 psi)

Fluid temperature:

–10 ... +110°C (+14 ... +230°F)

Ambient temperature:

–10 ... +50°C (+14 ... +122°F)

Material:

Body: PVDF

Seat seal: EPDM

Internal parts: PTFE-bellows

For contaminated fluids (particle > 1 mm) insertion of a strainer is recommended.

Standard models

Symbol	Port size	Orifice (mm)	Flow kv value *1)	Operating pressure *2)	Weight (kg)	Model Solenoid in V d.c.	Model Solenoid in V a.c.
	G1/4	3	0,23	0 ... 7	0 ... 101	0,3	8208000.8050.xxxxx
	G3/8	3	0,23	0 ... 7	0 ... 101	0,3	8208100.8050.xxxxx
	G1/4	4.5	0,42	0 ... 5	0 ... 72	0,3	8208060.8050.xxxxx
	G3/8	4.5	0,42	0 ... 5	0 ... 72	0,3	8208160.8050.xxxxx
	G1/4	6	0,62	0 ... 2	0 ... 29	0,3	8208070.8050.xxxxx
	G3/8	6	0,62	0 ... 2	0 ... 29	0,3	8208170.8050.xxxxx
	G1/4	8	0,83	0 ... 1	0 ... 14	0,3	8208080.8050.xxxxx
	G3/8	8	0,83	0 ... 1	0 ... 14	0,3	8208180.8050.xxxxx

xxxxx Please insert voltage and frequency codes

*1) Cv-value (US) \approx kv value \times 1,2

*2) For gases and liquid fluids up to 80 mm²/s (cSt)

Standard solenoid systems

Voltage and Frequency Solenoid 8050					
Code Voltage	Code Frequency	Voltage	Frequency	Power consumption Inrush	Holding
024	00	24 V d.c.	-	12 W	12 W
Voltage and Frequency Solenoid 8051					
110	49	110 V a.c. *3)	40 ... 60 Hz	13 VA	13 VA
120	49	120 V a.c. *3)	40 ... 60 Hz	13 VA	13 VA
230	49	230 V a.c. *3)	40 ... 60 Hz	13 VA	13 VA

*3) a.c. only with rectifier plug

Electrical details for all solenoid systems

Design	DIN VDE 0580
Voltage range	$\pm 10\%$
Duty cycle	100% ED
Protection class	EN 60529 IP65
Socket	Form A acc. to DIN EN 175301-803 (included)

According to DIN VDE 0580 at a solenoid temperature of +20°C.

At operating state temperature the input power of a coil decreases by up to ca. 30% due to physical reasons.

Additional solenoid systems for hazardous areas

ATEX category	ATEX protection class	IP protection class	So-lenoid	Standard voltages
II 2G II 2D	Ex eb mb IIC T3 Gb Ex mb tb IIIB T150°C Db	IP66	6202	24 V d.c., 110 V a.c., 230 V a.c.

Attention!

The conditions imposed on the Ex approvals lead to reduction of the permissible standard temperature ranges in the cases of explosion protected solenoids.

82090

2/2-way valves with DVGW-approval – Solenoid actuated, with forced lifting

Port size: G1/4 ... 1

**Orifice: DN 8 ... 25
(DIN ISO 228/1)**

**Qualification approval EN 161:2011
and EN ISO 23553-1**

Short response time < 1 s

Valve operates without differential pressure



Technical data

Medium:

Neutral gases and liquid fuels

Switching function:

Normally closed

Operation:

Solenoid actuated,
with forced lifting

Mounting position:

Optional, preferably solenoid
vertical on top

Flow direction:

Determined

Port size:

G1/4, G3/8, G1/2, G3/4, G1

Operating pressure:

0 ... 8 bar (0 ... 116 psi)

Fluid temperature:

0 ... +60°C (+32 ... +140°F)

Ambient temperature:

0 ... +60°C (+32 ... +140°F)

EC-Type Examination:

Certificate product

ID-No.: CE-0085CN0205

valve class A: G1/4 ... 3/4;

valve class B: G1; valve group 2

Material:

Body: Brass (CW617N)

Seat seal: NBR-G

Internal parts: Stainless steel,
brass

Strainer (with maximum mesh
size of 0.25 mm) is necessary
upstream of the valve.

Standard models

Symbol	Port size	Orifice (mm)	Flow kv value *1) (m³/h)	Operating pressure *2) (bar)	(psi)	Weight (kg)	Model Solenoid in V d.c.	Model Solenoid in V a.c.
	G1/4	8	1,1	0 ... 8	0 ... 116	0,8	8209000.9178.xxxxx	8209000.9179.xxxxx
	G3/8	10	2,3	0 ... 8	0 ... 116	0,8	8209100.9178.xxxxx	8209100.9179.xxxxx
	G1/2	12	2,6	0 ... 8	0 ... 116	0,9	8209200.9178.xxxxx	8209200.9179.xxxxx
	G3/4	20	5,4	0 ... 8	0 ... 116	1	8209300.9178.xxxxx	8209300.9179.xxxxx
	G1	25	5,8	0 ... 8	0 ... 116	1,3	8209400.9178.xxxxx	8209400.9179.xxxxx

xxxxx Please insert voltage and frequency codes

*1) Cv-value (US) ≈ kv value x 1,2

*2) For gases and liquid fluids up to 25 mm²/s (cSt)

Solenoid 917x

Frequency



Solenoid 9178: 24 ... 120 V



Solenoid 9179: 121 ... 250 V

Electrical details for all solenoid systems

Operation	DIN VDE 0580
Voltage range	±10%
Duty cycle	100% ED
Protection class	EN 60529 IP65
Socket	Form A acc. to DIN EN 175301-803 (included)

According to DIN VDE 0580 at a solenoid temperature of +20°C (+68°F).
At operating state temperature the input power of a coil decreases by up to
ca. 30% due to physical reasons.

Standard solenoid systems

Voltage and Frequency Solenoid 9178 *3)

Code Voltage	Code Frequen- cy	Voltage	Frequency	Power consumption Inrush	Holding
024	00	24 V d.c.	-	18 W	18 W
024	49	24 V a.c. *4)	40 ... 60 Hz	20 VA	20 VA
110	49	110 V a.c. *4)	40 ... 60 Hz	20 VA	20 VA

Voltage and Frequency Solenoid 9179 *3)

230	49	230 V a.c. *4)	40 ... 60 Hz	20 VA	20 VA
-----	----	----------------	--------------	-------	-------

*3) c US coil only

*4) A.c. only with rectifier plug

Further versions on request!

Additional solenoid systems for hazardous areas

ATEX- category	ATEX protection class	IP protection class	So- lenoid	Standard voltages
II 2G II 2D	Ex eb mb IIC T3 Gb Ex mb tb IIIB T140°C Db	IP66	6120	24 V d.c., 110 V a.c., 230 V a.c.

Attention!

The conditions imposed on the Ex approvals lead to reduction of the permissible
standard temperature ranges in the cases of explosion protected solenoids.

82510

2/2-way valves – Direct solenoid actuated

Port size: G1/8 ... 3/8

Orifice: DN 1,5 ... 5

Body with M5 fastening thread as standard

Functional compact design

Suitable for vacuum

Solenoid interchangeable without tools (Click-on®)

Valve operates without pressure differential

*NPT-connection available:
change 82510 to 82520*

Click-on®



Technical data

Medium:

Neutral gases and liquids

Switching function:

Normally closed

Operation:

Direct solenoid actuated

Mounting position:

Optional, preferably solenoid vertical on top

Flow direction:

Determined

Port size:

G1/8, G1/4, G3/8

Operating pressure:

See table

Fluid temperature:

–10 ... +90°C (+14 ... +194°F)

Ambient temperature:

–10 ... +50°C (+14 ... +122°F)

Material:

Body: Brass (CW617N)

Seat seal: NBR,

(70 bar Version - PTFE)

Internal parts: Stainless steel, brass

For contaminated fluids insertion of a strainer is recommended.

Standard models – Normally closed valves

Symbol	Port size	Orifice (mm)	Flow kv value *1) (m³/h)	Operating pressure *2) (bar)	(psi)	Weight (kg)	Model Solenoid in V d.c./AC
	G1/8	1,5	0,07	0 ... 25	0 ... 362	0,33	8251800.9101.xxxxx
	G1/4	1,5	0,07	0 ... 25	0 ... 362	0,33	8251000.9101.xxxxx
	G3/8	1,5	0,07	0 ... 25	0 ... 362	0,33	8251100.9101.xxxxx
	G1/8	1,5	0,07	0 ... 70	0 ... 1015	0,57	8251807.9151.xxxxx
	G1/4	1,5	0,07	0 ... 70	0 ... 1015	0,57	8251007.9151.xxxxx
	G3/8	1,5	0,07	0 ... 70	0 ... 1015	0,57	8251107.9151.xxxxx
	G1/8	2,5	0,15	0 ... 10	0 ... 145	0,33	8251820.9101.xxxxx
	G1/4	2,5	0,15	0 ... 10	0 ... 145	0,33	8251020.9101.xxxxx
	G3/8	2,5	0,15	0 ... 10	0 ... 145	0,33	8251120.9101.xxxxx
	G1/8	2,5	0,15	0 ... 40	0 ... 580	0,57	8251820.9151.xxxxx
	G1/4	2,5	0,15	0 ... 40	0 ... 580	0,57	8251020.9151.xxxxx
	G3/8	2,5	0,15	0 ... 40	0 ... 580	0,57	8251120.9151.xxxxx
	G1/8	3	0,21	0 ... 4	0 ... 58	0,33	8251840.9101.xxxxx
	G1/4	3	0,21	0 ... 4	0 ... 58	0,33	8251040.9101.xxxxx
	G3/8	3	0,21	0 ... 4	0 ... 58	0,33	8251140.9101.xxxxx
	G1/8	3	0,21	0 ... 20	0 ... 290	0,57	8251840.9151.xxxxx
	G1/4	3	0,21	0 ... 20	0 ... 290	0,57	8251040.9151.xxxxx
	G3/8	3	0,21	0 ... 20	0 ... 290	0,57	8251140.9151.xxxxx
	G1/8	4	0,35	0 ... 12	0 ... 174	0,57	8251860.9151.xxxxx
	G1/4	4	0,35	0 ... 12	0 ... 174	0,57	8251060.9151.xxxxx
	G3/8	4	0,35	0 ... 12	0 ... 174	0,57	8251160.9151.xxxxx
	G1/8	5	0,5	0 ... 6	0 ... 87	0,57	8251880.9151.xxxxx
	G1/4	5	0,5	0 ... 6	0 ... 87	0,57	8251080.9151.xxxxx
	G3/8	5	0,5	0 ... 6	0 ... 87	0,57	8251080.9151.xxxxx

xxxxx Please insert voltage and frequency codes

*1) Cv-value (US) ≈ kv value x 1,2

*2) For gases and liquid fluids up to 25 mm³/s (cSt)

82510

2/2-way valves – Direct solenoid actuated

Standard models – Normally opened valves

Symbol	Port size	Orifice (mm)	Flow kv value *1) (m³/h)	Operating pressure *2) (bar)	(psi)	Weight (kg)	Model Solenoid in V d.c./a.c.
	G1/4	1,5	0,07	0 ... 16	0 ... 232	0,33	8251001.9101.xxxxx
	G1/4	2,5	0,15	0 ... 6	0 ... 87	0,33	8251021.9101.xxxxx
	G1/4	2,5	0,15	0 ... 25	0 ... 362	0,57	8251021.9151.xxxxx
	G1/4	3	0,21	0 ... 3	0 ... 43	0,33	8251041.9101.xxxxx
	G1/4	3	0,21	0 ... 16	0 ... 232	0,57	8251041.9151.xxxxx
	G1/4	4	0,35	0 ... 8	0 ... 116	0,57	8251061.9151.xxxxx

xxxxx Please insert voltage and frequency codes

*1) Cv-value (US) \approx kv value x 1,2

*2) For gases and liquid fluids up to 25 mm²/s (cSt)

Standard solenoid systems

Voltage and Frequency Solenoid 9101 *3)					
Code Voltage	Code Frequency	Voltage	Frequency	Power consumption	
				Inrush	Holding
024	00	24 V d.c.	-	8 W	8 W
024	50	24 V a.c.	50 Hz	15 VA	12 VA
110	50	110 V a.c.	50 Hz	15 VA	12 VA
120	60	120 V a.c.	60 Hz	15 VA	12 VA
230	50	230 V a.c.	50 Hz	15 VA	12 VA
Voltage and Frequency Solenoid 9151 *3)					
024	00	24 V d.c.	-	18 W	18 W
024	50	24 V a.c.	50 Hz	45 VA	35 VA
110	50	110 V a.c.	50 Hz	45 VA	35 VA
120	60	120 V a.c.	60 Hz	45 VA	35 VA
230	50	230 V a.c.	50 Hz	45 VA	35 VA

Additional solenoid systems for hazardous areas

ATEX category	ATEX protection class	IP protection class	Solenoid	Standard voltages
II 2G II 2D	Ex eb mb IIC T4 Gb Ex mb tb IIIB T125°C Db	IP66	6106	24 V d.c., 110 V a.c., 230 V a.c.
II 2G II 2D	Ex eb mb IIC T4 Gb Ex mb tb IIIB T125°C Db	IP66	6126 *4)	24 V d.c., 110 V a.c., 230 V a.c.
II 3G II 3D	Ex ec IIC T4 Gc Ex tc IIIC T130°C Dc	IP65	9116	24 V d.c., 110 V a.c., 230 V a.c.
II 3G II 3D	Ex ec IIC T4 Gc Ex tc IIIC T130°C Dc	IP65	9176	24 V d.c., 110 V a.c., 230 V a.c.

Attention!

The conditions imposed on the Ex approvals lead to reduction of the permissible standard temperature ranges in the cases of explosion protected solenoids.

*4) from G1 1/4 / 1 1/4 NPT (16 bar)

Electrical details for all solenoid systems

Design	DIN VDE 0580
Voltage range	$\pm 10\%$
Duty cycle	100% ED
Protection class	EN 60529 IP65
Socket	Form A acc. to DIN EN 175301-803 (included)

According to DIN VDE 0580 at a solenoid temperature of +20°C.

At operating state temperature the input power of a coil decreases by up to ca. 30% due to physical reasons.

Further versions on request!

*3)  US coil only

82530

2/2-way valves – Solenoid actuated, with forced lifting

Port size: G1/4 ... 1/2

Orifice: DN 10


Functional design

Operating pressure 0 ... 20 bar
with alternating current and NBR sealing

Compact solenoid with integrated core tube

Valve operates without differential pressure

*NPT-connection available:
change 82530 to 82630*



Technical data

Medium:

Neutral gases and liquids

Switching function:

Normally closed

Operation:

Solenoid actuated,
with forced lifting

Mounting position:

Optional, preferably solenoid
vertical on top

Flow direction:

Determined

Port size:

G1/4, G3/8, G1/2

Operating pressure:

0 ... 10 bar (0 ... 145 psi)

Fluid temperature:

–10 ... +90°C (+14 ... +194°F)

Ambient temperature:

–10 ... +50°C (+14 ... +122°F)

Material:

Body: Brass (CW617N), PA66

Seat seal: NBR

Internal parts: Stainless steel,
PVDF

For contaminated fluids insertion
of a strainer is recommended.

Standard models

Symbol	Port size	Orifice (mm)	Valve length (mm)	Flow kv value *1) (m³/h)	Operating pressure *2) (bar)	(psi)	Weight (kg)	Model Solenoid in V d.c./a.c.
	G1/4	10	44	1,5	0 ... 10	0 ... 145	0,5	8253000.8001.xxxxx
	G3/8	10	44	1,7	0 ... 10	0 ... 145	0,5	8253100.8001.xxxxx
	G1/2	10	60	1,7	0 ... 10	0 ... 145	0,6	8253200.8001.xxxxx

xxxxx Please insert voltage and frequency codes

*1) Cv-value (US) ≈ kv value x 1,2

*2) For gases and liquid fluids up to 25 mm²/s (cSt)

Standard solenoid systems

Voltage and Frequency Solenoid 8001					
Code Voltage	Code Frequency	Voltage	Frequency	Power consumption	
				Inrush	Holding
024	00	24 V d.c.	-	12 W	12 W
024	50	24 V a.c.	50 Hz	20 VA	16 VA
110	50	110 V a.c.	50 Hz	20 VA	16 VA
120	60	120 V a.c.	60 Hz	20 VA	16 VA
230	50	230 V a.c.	50 Hz	20 VA	16 VA

Further versions on request!

Additional solenoid systems

Option	Solenoid	Standard voltages
Solenoid with rectifier	8004	110 V a.c., 230 V a.c.

Electrical details for all solenoid systems

Design	DIN VDE 0580
Voltage range	±10%
Duty cycle	100% ED
Protection class	EN 60529 IP65
Socket	Form A acc. to DIN EN 175301-803 (included)

According to DIN VDE 0580 at a solenoid temperature of +20°C.

At operating state temperature the input power of a coil decreases by
up to ca. 30% due to physical reasons.

Additional solenoid systems for hazardous areas

ATEX category	ATEX protection class	IP protec- tion class	Solenoid	Standard voltages
II 2G II 2D	Ex eb mb IIC T3 Gb Ex mb tb IIIB T150°C Db	IP66	6200	24 V d.c., 110 V a.c., 230 V a.c.

Attention!

The conditions imposed on the Ex approvals lead to reduction of the permissible
standard temperature ranges in the cases of explosion protected solenoids.

82540

2/2-way valves – Solenoid actuated, with forced lifting

Port size: G1/4 ... 2

Orifice: DN 8 ... 50

For systems with low or fluctuating pressure

Suitable for vacuum

Solenoid interchangeable without tools (Click-on®)
only solenoid 915x and 940x

Damped operation

Valve operates without differential pressure

*NPT-connection available:
change 82540 to 82640*

Click-on®



Technical data

Medium:

Neutral gases and liquids

Switching function:

Normally closed

Operation:

Solenoid actuated,
with forced lifting

Mounting position:

Optional, preferably solenoid
vertical on top

Flow direction:

Determined

Port size:

G1/4, G3/8, G1/2, G3/4, G1,
G1 1/4, G1 1/2, G2

Operating pressure:

See table

Fluid temperature:

–10 ... +90°C (+14 ... +194°F)

Ambient temperature:

–10 ... +50°C (+14 ... +122°F)

Material:

Body: Brass (CW617N)

Seat seal: NBR-K

Internal parts: Stainless steel,
PVDF, brass

For contaminated fluids insertion
of a strainer is recommended.

Standard models

Symbol	Port size	Orifice (mm)	Flow kv value *1) (m³/h)	Operating pressure *2) (bar)	(psi)	Weight (kg)	Model Solenoid in V d.c.	Model Solenoid in V a.c.
	G1/4	8	1,9	0 ... 10	0 ... 145	0,8	8254000.9151.xxxxx	8254000.9154.xxxxx
	G1/4	8	1,9	0 ... 16 3*)	0 ... 232 *3)	0,8	8254000.9301.xxxxx	8254000.9304.xxxxx
	G3/8	10	3	0 ... 10	0 ... 145	0,8	8254100.9151.xxxxx	8254100.9154.xxxxx
	G3/8	10	3	0 ... 16 3*)	0 ... 232 *3)	0,8	8254100.9301.xxxxx	8254100.9304.xxxxx
	G1/2	12	3,4	0 ... 10	0 ... 145	0,9	8254200.9151.xxxxx	8254200.9154.xxxxx
	G1/2	12	3,4	0 ... 16 3*)	0 ... 232 *3)	0,9	8254200.9301.xxxxx	8254200.9304.xxxxx
	G3/4	20	5,8	0 ... 10	0 ... 145	1	8254300.9151.xxxxx	8254300.9154.xxxxx
	G3/4	20	5,8	0 ... 16 3*)	0 ... 232 *3)	1	8254300.9301.xxxxx	8254300.9304.xxxxx
	G1	25	8	0 ... 10	0 ... 145	1,3	8254400.9151.xxxxx	8254400.9154.xxxxx
	G1	25	8	0 ... 16 3*)	0 ... 232 *3)	1,3	8254400.9301.xxxxx	8254400.9304.xxxxx
	G1 1/4	32	23	0 ... 16	0 ... 232	4,3	8254500.9401.xxxxx	8254500.9404.xxxxx
	G1 1/2	40	25	0 ... 16	0 ... 232	4,3	8254600.9401.xxxxx	8254600.9404.xxxxx
	G2	50	41	0 ... 16	0 ... 232	5,4	8254700.9401.xxxxx	8254700.9404.xxxxx

xxxxx Please insert voltage and frequency codes

*1) Cv-value (US) \approx kv value x 1,2

*2) For gases and liquid fluids up to 25 mm²/s (cSt)

*3) For liquid mediums and an operating pressure > 10 bar is the maximum allowed differential pressure limited to 2 bar.

Standard solenoid systems

Voltage and Frequency Solenoid 9151/9154 *4)					
Code Voltage	Code Frequency	Voltage	Frequency	Power consumption	
				Inrush	Holding
024	00	24 V d.c.	-	18 W	18 W
024	49	24 V a.c. *5)	40 ... 60 Hz	20 VA	20 VA
110	49	110 V a.c. *5)	40 ... 60 Hz	20 VA	20 VA
120	49	120 V a.c. *5)	40 ... 60 Hz	20 VA	20 VA
230	49	230 V a.c. *5)	40 ... 60 Hz	20 VA	20 VA
Voltage and Frequency Solenoid 9301/9304 *4)					
024	00	24 V d.c.	-	18 W	18 W
024	49	24 V a.c. *5)	40 ... 60 Hz	20 VA	20 VA
110	49	110 V a.c. *5)	40 ... 60 Hz	20 VA	20 VA
120	49	120 V a.c. *5)	40 ... 60 Hz	20 VA	20 VA
230	49	230 V a.c. *5)	40 ... 60 Hz	20 VA	20 VA
Voltage and Frequency Solenoid 9401/9404 *4)					
024	00	24 V d.c.	-	38 W	38 W
024	49	24 V a.c. *5)	40 ... 60 Hz	42 VA	42 VA
110	49	110 V a.c. *5)	40 ... 60 Hz	42 VA	42 VA
120	49	120 V a.c. *5)	40 ... 60 Hz	42 VA	42 VA
230	49	230 V a.c. *5)	40 ... 60 Hz	42 VA	42 VA
Voltage and Frequency Solenoid 8401/8404					
024	00	24 V d.c.	-	40 W	40 W
024	49	24 V a.c. *5)	40 ... 60 Hz	45 VA	45 VA
110	49	110 V a.c. *5)	40 ... 60 Hz	45 VA	45 VA
120	49	120 V a.c. *5)	40 ... 60 Hz	45 VA	45 VA
230	49	230 V a.c. *5)	40 ... 60 Hz	45 VA	45 VA

*4)  US coil only

*5) a.c. only with rectifier plug

*6) d.c. only, for a.c. solenoids with design inspection certificate acc. to category 2,
e. g. 6120/ 6140/ 6240

Further versions on request!

Electrical details for all solenoid systems

Design	DIN VDE 0580
Voltage range	±10%
Duty cycle	100% ED
Protection class	EN 60529 IP65
Socket	Form A acc. to DIN EN 175301-803 (included)

According to DIN VDE 0580 at a solenoid temperature of +20°C.

At operating state temperature the input power of a coil decreases by up to ca. 30% due to physical reasons.

Additional solenoid systems for hazardous areas

ATEX category	ATEX protection class	IP protection class	Solenoid	Standard voltages
II 3G II 3D	Ex ec IIC T4 Gc Ex tc IIIC T130°C DC	IP65	9326 *6)	24 V d.c.
II 3G II 3D	Ex ec IIC T4 Gc Ex tc IIIC T130°C DC	IP65	8426 *6)	24 V d.c.
II 3G II 3D	Ex ec IIC T4 Gc Ex tc IIIC T130°C DC	IP65	9176 *6)	24 V d.c.
II 3G II 3D	Ex ec IIC T4 Gc Ex tc IIIC T130°C DC	IP65	9426 *6)	24 V d.c.
II 2G II 2D	Ex eb mb IIC T3 Gb Ex mb tb IIIB T140°C Db	IP66	6120	24 V d.c., 110 V a.c., 230 V a.c.
II 2G II 2D	Ex eb mb IIC T3 Gb Ex mb tb IIIB T135°C Db	IP66	6140	24 V d.c., 110 V a.c., 230 V a.c.
II 2G II 2D	Ex eb mb IIC T3 Gb Ex mb tb IIIB T140°C Db	IP66	6240	24 V d.c., 110 V a.c., 230 V a.c.

Attention!

The conditions imposed on the Ex approvals lead to reduction of the permissible standard temperature ranges in the cases of explosion protected solenoids.

82560

2/2-way valves – Solenoid actuated, with forced lifting

Port size: G1/4 ... 1/2

Orifice: DN 10

Suitable for vacuum

Compact solenoid with integrated core tube

Valve operates without differential pressure



Stainless Steel



Technical data

Medium:

Slightly aggressive gases and liquids

Switching function:

Normally closed

Operation:

Solenoid actuated, with forced lifting

Mounting position:

Optional, preferably solenoid vertical on top

Flow direction:

Determined

Port size:

G1/4, G3/8, G1/2

Operating pressure:

0 ... 10 bar (0 ... 145 psi)

Fluid temperature:

–10 ... +90°C (+14 ... +194°F)

Ambient temperature:

–10 ... +50°C (+14 ... +122°F)

Material:

Body: Stainless steel (1.4408), PA66

Seat seal: NBR

Internal parts: Stainless steel, PVDF, Sandvik 1802

For contaminated fluids insertion of a strainer is recommended.

Standard models

Symbol	Port size	Orifice (mm)	Valve length (mm)	Flow kv value *1) (m³/h)	Operating pressure *2) (bar)	(psi)	Weight (kg)	Model Solenoid in V d.c.	Model Solenoid in V a.c.
	G1/4	10	44	1,5	0 ... 10	0 ... 145	0,5	8256000.8001.xxxxx	8256000.8004.xxxxx
	G3/8	10	44	1,7	0 ... 10	0 ... 145	0,5	8256100.8001.xxxxx	8256100.8004.xxxxx
	G1/2	10	60	1,7	0 ... 10	0 ... 145	0,6	8256200.8001.xxxxx	8256200.8004.xxxxx

xxxxx Please insert voltage and frequency codes

*1) Cv-value (US) ≈ kv value x 1,2

*2) For gases and liquid fluids up to 25 mm³/s (cSt)

Standard solenoid systems

Voltage and Frequency Solenoid 8001/8004					
Code Voltage	Code Frequency	Voltage	Frequency	Power consumption	
				Inrush	Holding
024	00	24 V d.c.	-	12 W	12 W
024	49	24 V a.c. *3)	40 ... 60 Hz	13 VA	13 VA
110	49	110 V a.c. *3)	40 ... 60 Hz	13 VA	13 VA
120	49	120 V a.c. *3)	40 ... 60 Hz	13 VA	13 VA
230	49	230 V a.c. *3)	40 ... 60 Hz	13 VA	13 VA

*3) a.c. only with rectifier plug

Further versions on request!

Electrical details for all solenoid systems

Design	DIN VDE 0580
Voltage range	±10%
Duty cycle	100% ED
Protection class	EN 60529 IP65
Socket	Form A acc. to DIN EN 175301-803 (included)

According to DIN VDE 0580 at a solenoid temperature of +20°C.

At operating state temperature the input power of a coil decreases by up to ca. 30% due to physical reasons.

Additional solenoid systems for hazardous areas

ATEX category	ATEX protection class	IP protection class	Solenoid	Standard voltages
II 2G II 2D	Ex eb mb IIC T3 Gb Ex mb tb IIIB T150°C Db	IP66	6200	24 V d.c., 110 V a.c., 230 V a.c.

Attention!

The conditions imposed on the Ex approvals lead to reduction of the permissible standard temperature ranges in the cases of explosion protected solenoids.

82590

2/2-way valves – Solenoid actuated, with forced lifting

Port size: G1/4 ... 2

Orifice: DN 8 ... 50

For systems with low or fluctuating pressure

Suitable for vacuum

Solenoid interchangeable without tools (*Click-on®*) only solenoid 915x and 940x

Damped operation

Valve operates without differential pressure



Click-on®

Stainless Steel



Technical data

Medium:

Slightly aggressive gases and liquids

Switching function:

Normally closed

Operation:

Solenoid actuated, with forced lifting

Mounting position:

Optional, preferably solenoid vertical on top

Flow direction:

Determined

Port size:

G1/4, G3/8, G1/2, G3/4, G1, G1 1/4, G1 1/2, G2

Operating pressure:

See table

Fluid temperature:

–10 ... +90°C (+14 ... +194°F)

Ambient temperature:

–10 ... +50°C (+14 ... +122°F)

Material:

Body: Stainless steel (1.4408)

Seat seal: NBR-K

Internal parts: Stainless steel, PVDF

For contaminated fluids insertion of a strainer is recommended.

Standard models

Symbol	Port size	Orifice (mm)	Flow kv value *1) (m³/h)	Operating pressure *2) (bar)	(psi)	Weight (kg)	Model Solenoid in V d.c.	Model Solenoid in V a.c.
	G1/4	8	1,9	0 ... 10	0 ... 145	0,7	8259000.9151.xxxxx	8259000.9154.xxxxx
	G3/8	10	3	0 ... 10	0 ... 145	0,7	8259100.9151.xxxxx	8259100.9154.xxxxx
	G1/2	12	3,4	0 ... 10	0 ... 145	0,8	8259200.9151.xxxxx	8259200.9154.xxxxx
	G3/4	20	5,8	0 ... 10	0 ... 145	0,9	8259300.9151.xxxxx	8259300.9154.xxxxx
	G1	25	8	0 ... 10	0 ... 145	1,3	8259400.9151.xxxxx	8259400.9154.xxxxx
	G1 1/4	32	23	0 ... 16	0 ... 232	4,3	8259500.9401.xxxxx	8259500.9404.xxxxx
	G1 1/2	40	25	0 ... 16	0 ... 232	4,1	8259600.9401.xxxxx	8259600.9404.xxxxx
	G2	50	41	0 ... 16	0 ... 232	5,1	8259700.9401.xxxxx	8259700.9404.xxxxx

xxxxx Please insert voltage and frequency codes

*1) Cv-value (US) ≈ kv value x 1,2

*2) For gases and liquid fluids up to 25 mm²/s (cSt)

G1/4 ... G 1 max. 16 bar on request

82590

2/2-way valves – Solenoid actuated, with forced lifting

Standard solenoid systems

Voltage and Frequency Solenoid 9151/9154 *3)					
Code Voltage	Code Frequency	Voltage	Frequency	Power consumption	
				Inrush	Holding
024	00	24 V d.c.	-	18 W	18 W
024	49	24 V a.c. *4)	40 ... 60 Hz	20 VA	20 VA
110	49	110 V a.c. *4)	40 ... 60 Hz	20 VA	20 VA
120	49	120 V a.c. *4)	40 ... 60 Hz	20 VA	20 VA
230	49	230 V a.c. *4)	40 ... 60 Hz	20 VA	20 VA
Voltage and Frequency Solenoid 9301/9304 *3)					
024	00	24 V d.c.	-	18 W	18 W
024	49	24 V a.c. *4)	40 ... 60 Hz	20 VA	20 VA
110	49	110 V a.c. *4)	40 ... 60 Hz	20 VA	20 VA
120	49	120 V a.c. *4)	40 ... 60 Hz	20 VA	20 VA
230	49	230 V a.c. *4)	40 ... 60 Hz	20 VA	20 VA
Voltage and Frequency Solenoid 9401/9404 *3)					
024	00	24 V d.c.	-	38 W	38 W
024	49	24 V a.c. *4)	40 ... 60 Hz	42 VA	42 VA
110	49	110 V a.c. *4)	40 ... 60 Hz	42 VA	42 VA
120	49	120 V a.c. *4)	40 ... 60 Hz	42 VA	42 VA
230	49	230 V a.c. *4)	40 ... 60 Hz	42 VA	42 VA
Voltage and Frequency Solenoid 8401/8404					
024	00	24 V d.c.	-	40 W	40 W
024	49	24 V a.c. *4)	40 ... 60 Hz	45 VA	45 VA
110	49	110 V a.c. *4)	40 ... 60 Hz	45 VA	45 VA
120	49	120 V a.c. *4)	40 ... 60 Hz	45 VA	45 VA
230	49	230 V a.c. *4)	40 ... 60 Hz	45 VA	45 VA

*3)  US only (with the exception of solenoid 94xx up to 41 V a.c.)

*4) a.c. only with rectifier plug

*5) d.c. only, for a.c. solenoids with design inspection certificate acc. to category 2, e. g. 6120 or 6240

Further versions on request!

Electrical details for all solenoid systems

Design	DIN VDE 0580
Voltage range	±10%
Duty cycle	100% ED
Protection class	EN 60529 IP65
Socket	Form A acc. to DIN EN 175301-803 (included)

According to DIN VDE 0580 at a solenoid temperature of +20°C.

At operating state temperature the input power of a coil decreases by up to ca. 30% due to physical reasons.

Additional solenoid systems for hazardous areas

ATEX category	ATEX protection class	IP protection class	Solenoid	Standard voltages
II 3G II 3D	Ex ec IIC T4 Gc Ex tc IIIC T130°C DC	IP65	8426 *5)	24 V d.c.
II 3G II 3D	Ex ec IIC T4 Gc Ex tc IIIC T130°C DC	IP65	9176 *5)	24 V d.c.
II 3G II 3D	Ex ec IIC T4 Gc Ex tc IIIC T130°C DC	IP65	9426 *5)	24 V d.c.
II 2G II 2D	Ex eb mb IIC T3 Gb Ex mb tb IIIB T140°C Db	IP66	6120	24 V d.c., 110 V a.c., 230 V a.c.
II 2G II 2D	Ex eb mb IIC T3 Gb Ex mb tb IIIB T140°C Db	IP66	6240	24 V d.c., 110 V a.c., 230 V a.c.

Attention!

The conditions imposed on the Ex approvals lead to reduction of the permissible standard temperature ranges in the cases of explosion protected solenoids.

82610

2/2-way valves – Direct solenoid actuated

Port size: G1/8 ... 3/8

Orifice: DN 1,5 ... 5

Body with M5 fastening thread as standard

Functional compact design

Suitable for vacuum

Solenoid interchangeable without tools (Click-on®)

Valve operates without differential pressure

*NPT-connection available:
change 82610 to 84620*



Click-on®

Stainless Steel



Technical data

Medium:

Neutral and slightly aggressive gases and liquid fluids

Switching function:

Normally closed

Operation:

Direct solenoid actuated

Mounting position:

Optional, preferably solenoid vertical on top

Flow direction:

Determined

Port size:

G1/8, G1/4, G3/8

Operating pressure:

0 ... 40 bar (0 ... 580 psi)

Fluid temperature:

–10 ... +110°C (+14 ... +230°F)

Ambient temperature:

–10 ... +50°C (+14 ... +122°F)

Material:

Body: Stainless steel (1.4408)

Seat seal: FPM

Internal parts: Stainless steel

For contaminated fluids insertion of a strainer is recommended.

Standard models – Normally closed valves

Symbol	Port size	Orifice (mm)	Flow kv value *1) (m³/h)	Operating pressure *2) (bar)	(psi)	Weight (kg)	Model Solenoid in V d.c./a.c.
	G1/8	1,5	0,07	0 ... 25	0 ... 362	0,33	8261803.9101.xxxxx
	G1/4	1,5	0,07	0 ... 25	0 ... 362	0,33	8261003.9101.xxxxx
	G3/8	1,5	0,07	0 ... 25	0 ... 362	0,33	8261103.9101.xxxxx
	G1/8	1,5	0,07	0 ... 70	0 ... 1015	0,57	8261807.9151.xxxxx
	G1/4	1,5	0,07	0 ... 70	0 ... 1015	0,57	8261007.9151.xxxxx
	G3/8	1,5	0,07	0 ... 70	0 ... 1015	0,57	8261107.9151.xxxxx
	G1/8	2,5	0,15	0 ... 10	0 ... 145	0,33	8261823.9101.xxxxx
	G1/4	2,5	0,15	0 ... 10	0 ... 145	0,33	8261023.9101.xxxxx
	G3/8	2,5	0,15	0 ... 10	0 ... 145	0,33	8261123.9101.xxxxx
	G1/8	2,5	0,15	0 ... 40	0 ... 580	0,57	8261823.9151.xxxxx
	G1/4	2,5	0,15	0 ... 40	0 ... 580	0,57	8261023.9151.xxxxx
	G3/8	2,5	0,15	0 ... 40	0 ... 580	0,57	8261123.9151.xxxxx
	G1/8	3	0,21	0 ... 4	0 ... 58	0,33	8261843.9101.xxxxx
	G1/4	3	0,21	0 ... 4	0 ... 58	0,33	8261043.9101.xxxxx
	G3/8	3	0,21	0 ... 4	0 ... 58	0,33	8261143.9101.xxxxx
	G1/8	3	0,21	0 ... 20	0 ... 290	0,57	8261843.9151.xxxxx
	G1/4	3	0,21	0 ... 20	0 ... 290	0,57	8261043.9151.xxxxx
	G3/8	3	0,21	0 ... 20	0 ... 290	0,57	8261143.9151.xxxxx
	G1/8	4	0,35	0 ... 12	0 ... 174	0,57	8261863.9151.xxxxx
	G1/4	4	0,35	0 ... 12	0 ... 174	0,57	8261063.9151.xxxxx
	G3/8	4	0,35	0 ... 12	0 ... 174	0,57	8261163.9151.xxxxx
	G1/8	5	0,5	0 ... 6	0 ... 87	0,57	8261883.9151.xxxxx
	G1/4	5	0,5	0 ... 6	0 ... 87	0,57	8261083.9151.xxxxx
	G3/8	5	0,5	0 ... 6	0 ... 87	0,de57	8261183.9151.xxxxx

xxxx Please insert voltage and frequency codes

*1) Cv-value (US) ≈ kv value x 1,2


*2) For gases and liquid fluids up to 25 mm²/s (cSt)

G1/4 ... 1 max. 16 bar on request

82610

2/2-way valves – Direct solenoid actuated

Standard models – Normally opened valves

Symbol	Port size	Orifice (mm)	Flow kv value *3) (m³/h)	Operating pressure *4) (bar)	Weight (kg)	Model Solenoid in V d.c./a.c.
	G1/4	1,5	0,07	0 ... 16	0,33	8261001.9101.xxxxx
	G1/4	2,5	0,15	0 ... 6	0,33	8261021.9101.xxxxx
	G1/4	2,5	0,15	0 ... 25	0,57	8261021.9151.xxxxx
	G1/4	3	0,21	0 ... 3	0,33	8261041.9101.xxxxx
	G1/4	3	0,21	0 ... 16	0,57	8261041.9151.xxxxx
	G1/4	4	0,35	0 ... 8	0,57	8261061.9151.xxxxx

xxxxx Please insert voltage and frequency codes

*3) Cv-value (US) \approx kv value x 1,2

*4) For gases and liquid fluids up to 25 mm²/s (cSt)

G1/4 ... 1 max. 16 bar on request

Standard solenoid systems

Voltage and Frequency Solenoid 9101/9104 *5)					
Code	Code	Voltage	Frequency	Power consumption	
Voltage	Frequency			Inrush	Holding
024	00	24 V d.c.	-	8 W	8 W
024	49	24 V a.c. *6)	40 ... 60 Hz	9 VA	9 VA
110	49	110 V a.c. *6)	40 ... 60 Hz	9 VA	9 VA
120	49	120 V a.c. *6)	40 ... 60 Hz	9 VA	9 VA
230	49	230 V a.c. *6)	40 ... 60 Hz	9 VA	9 VA
Voltage and Frequency Solenoid 9151/9154 *5)					
024	00	24 V d.c.	-	18 W	18 W
024	49	24 V a.c. *6)	40 ... 60 Hz	20 VA	20 VA
110	49	110 V a.c. *6)	40 ... 60 Hz	20 VA	20 VA
120	49	120 V a.c. *6)	40 ... 60 Hz	20 VA	20 VA
230	49	230 V a.c. *6)	40 ... 60 Hz	20 VA	20 VA



*5) c  us coil only

*6) a.c. only with rectifier plug

Further versions on request!

Electrical details for all solenoid systems

Design	DIN VDE 0580
Voltage range	±10%
Duty cycle	100% ED
Protection class	EN 60529 IP65
Socket	Form A acc. to DIN EN 175301-803 (included)

According to DIN VDE 0580 at a solenoid temperature of +20°C.

At operating state temperature the input power of a coil decreases by up to ca. 30% due to physical reasons.

Additional solenoid systems for hazardous areas

ATEX category	ATEX protection class	IP protection class	Solenoid	Standard voltages
II 2G II 2D	Ex eb mb IIC T4 Gb Ex mb tb IIIB T125°C Db	IP66	6106	24 V d.c., 110 V a.c., 230 V a.c.
II 2G II 2D	Ex eb mb IIC T4 Gb Ex mb tb IIIB T125°C Db	IP66	6126 *7)	24 V d.c., 110 V a.c., 230 V a.c.
II 3G II 3D	Ex ec IIC T4 Gc Ex tc IIIC T130°C Dc	IP65	9116	24 V d.c., 110 V a.c., 230 V a.c.
II 3G II 3D	Ex ec IIC T4 Gc Ex tc IIIC T130°C Dc	IP65	9176	24 V d.c., 110 V a.c., 230 V a.c.

Attention!

The conditions imposed on the Ex approvals lead to reduction of the permissible standard temperature ranges in the cases of explosion protected solenoids.

*7) from G1 1/4 / 1 1/4 NPT (16 bar)

83040

2/2-way valves – Solenoid actuated, with forced lifting

Port size: Flange PN 16

Orifice: DN 15 ... 50

Suitable for vacuum

Solenoid interchangeable without tools (Click-on®)

Damped operation

Valve operates without differential pressure



Click-on®



Technical data

Medium:

Neutral gases and liquids

Switching function:

Normally closed

Operation:

Solenoid actuated,
with forced lifting

Mounting position:

Optional, preferably solenoid
vertical on top

Flow direction:

Determined

Port size:

Flange PN 16,
DN 15, DN 20, DN 25,
DN 32, DN 40, DN 50

Operating pressure:

0 ... 10/16 bar (0 ... 145/232 psi)

Fluid temperature:

–10 ... +90°C (+14 ... +194°F)

Ambient temperature:

–10 ... +50°C (+14 ... +122°F)

Material:

Body: Cast steel, brass

Seat seal: NBR

Internal parts: Stainless steel,
PVDF, brass

For contaminated fluids insertion
of a strainer is recommended.

Standard models

Symbol	Orifice (mm)	Flow kv value *1) (m³/h)	Operating pressure *2) (bar)	Operating pressure *2) (psi)	Weight (kg)	Model Solenoid in V d.c.	Model Solenoid in V a.c.
	15	3,4	0 ... 10	0 ... 145	1,9	8304200.9151.xxxxx	8304200.9154.xxxxx
	15	3,4	0 ... 16	0 ... 232	2,4	8304200.9301.xxxxx	8304200.9304.xxxxx
	20	5,8	0 ... 10	0 ... 145	2,5	8304300.9151.xxxxx	8304300.9154.xxxxx
	20	5,8	0 ... 16	0 ... 232	3	8304300.9301.xxxxx	8304300.9304.xxxxx
	25	8	0 ... 10	0 ... 145	3	8304400.9151.xxxxx	8304400.9154.xxxxx
	25	8	0 ... 16	0 ... 232	3,5	8304400.9301.xxxxx	8304400.9304.xxxxx
	32	23	0 ... 16	0 ... 232	6,7	8304500.9401.xxxxx	8304500.9404.xxxxx
	40	25	0 ... 16	0 ... 232	7,4	8304600.9401.xxxxx	8304600.9404.xxxxx
	50	41	0 ... 16	0 ... 232	10	8304700.9401.xxxxx	8304700.9404.xxxxx

xxxxx Please insert voltage and frequency codes

*1) Cv-value (US) ≈ kv value x 1,2

*2) For gases and liquid fluids up to 25 mm²/s (cSt)

83040

2/2-way valves – Solenoid actuated, with forced lifting

Standard solenoid systems

Voltage and Frequency Solenoid 9151/9154 *3)					
Code Voltage	Code Frequency	Voltage	Frequency	Power consumption	
				Inrush	Holding
024	00	24 V d.c.	-	18 W	18 W
024	49	24 V a.c. *4)	40 ... 60 Hz	20 VA	20 VA
110	49	110 V a.c. *4)	40 ... 60 Hz	20 VA	20 VA
120	49	120 V a.c. *4)	40 ... 60 Hz	20 VA	20 VA
230	49	230 V a.c. *4)	40 ... 60 Hz	20 VA	20 VA
Voltage and Frequency Solenoid 9401/9404 *3)					
024	00	24 V d.c.	-	38 W	38 W
024	49	24 V a.c. *4)	40 ... 60 Hz	42 VA	42 VA
110	49	110 V a.c. *4)	40 ... 60 Hz	42 VA	42 VA
120	49	120 V a.c. *4)	40 ... 60 Hz	42 VA	42 VA
230	49	230 V a.c. *4)	40 ... 60 Hz	42 VA	42 VA
Voltage and Frequency Solenoid 8301/8304					
024	00	24 V d.c.	-	22 W	22 W
024	49	24 V a.c. *4)	40 ... 60 Hz	25 VA	25 VA
110	49	110 V a.c. *4)	40 ... 60 Hz	25 VA	25 VA
120	49	120 V a.c. *4)	40 ... 60 Hz	25 VA	25 VA
230	49	230 V a.c. *4)	40 ... 60 Hz	25 VA	25 VA
Voltage and Frequency Solenoid 8401/8404					
024	49	24 V d.c.	-	40 W	40 W
024	49	24 V a.c. *4)	40 ... 60 Hz	45 VA	45 VA
110	49	110 V a.c. *4)	40 ... 60 Hz	45 VA	45 VA
120	49	120 V a.c. *4)	40 ... 60 Hz	45 VA	45 VA
230	49	230 V a.c. *4)	40 ... 60 Hz	45 VA	45 VA

*3)  US coil only (with the exception of solenoid 94xx up to 41 V a.c.)

*4) A.c. only with rectifier plug

Further versions on request!

Electrical details for all solenoid systems

Design	DIN VDE 0580
Voltage range	±10%
Duty cycle	100% ED
Protection class	EN 60529 IP65
Socket	Form A acc. to DIN EN 175301-803 (included)

According to DIN VDE 0580 at a solenoid temperature of +20°C.

At operating state temperature the input power of a coil decreases by up to ca. 30% due to physical reasons.

Additional solenoid systems for hazardous areas

ATEX category	ATEX protection class	IP protection class	Solenoid	Standard voltages
II 2G II 2D	Ex eb mb IIC T3 Gb Ex mb tb IIIB T140°C Db	IP66	6120	24 V d.c., 110 V a.c., 230 V a.c.
II 2G II 2D	Ex eb mb IIC T3 Gb Ex mb tb IIIB T140°C Db	IP66	6240	24 V d.c., 110 V a.c., 230 V a.c.
II 3G II 3D	Ex ec IIC T4 Gc Ex tc IIIC T130°C DC	IP65	9176 *5)	24 V d.c.
II 3G II 3D	Ex ec IIC T4 Gc Ex tc IIIC T130°C DC	IP65	9426 *5)	24 V d.c.
II 3G II 3D	Ex ec IIC T4 Gc Ex tc IIIC T130°C DC	IP65	8426 *5)	24 V d.c.

Attention!

The conditions imposed on the Ex approvals lead to reduction of the permissible standard temperature ranges in the cases of explosion protected solenoids.

*5) d.c. only, for a.c. solenoids with design inspection certificate acc. to category 2, e. g. 6120 or 6240

83150

2/2-way valves – Direct solenoid actuated

Orifice: DN 2,5 ... 4,5

Functional compact design

High flow rate


Increased service life > low maintenance

Good corrosion resistance

Solenoid interchangeable without tools (Click-on®)

Valve operates without pressure differential

Approvals: wetted materials FDA and WRAS

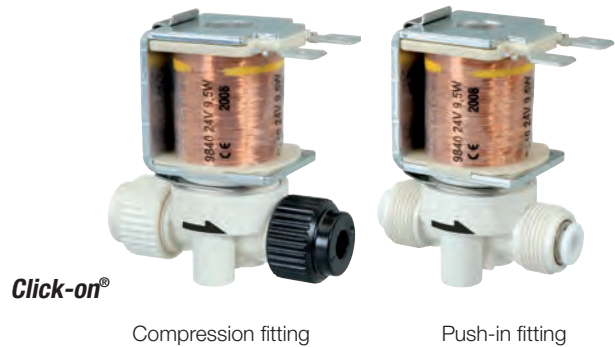

Technical data

Medium:

Neutral gases and liquids

Switching function:

Normally closed

Operation:

Direct solenoid actuated

Mounting position:

Optional, preferably solenoid vertical on top

Flow direction:

Determined

Port size:

- Standard
ø 6 mm (O/D 6 mm, I/D 4 mm)
- Optional (Compression fitting)
ø mit 8 mm PIF
(O/D 8 mm, I/D 6 mm)
- Optional (Tube push-in fitting)
ø with 4 mm PIF
(O/D 4 mm, I/D 2 mm)
OD tube tolerance ± 0.1 mm

Operating pressure:

0 ... 12 bar (0 ... 174 psi)

Fluid temperature:

0 ... +125°C (+32 ... +257°F)

Ambient temperature:

0 ... +50°C (+32 ... +122°F)

Material:


Body: PPSU

(Polyphenylsulfon)

Seat seal: EPDM

Internal parts: Stainless steel

Standard models

Symbol	Port size	Orifice (mm)	Flow kv value *1) (m³/h)	Operating pressure *2 Solenoid								Weight (kg) *3)	Model
				(bar)	(psi)	(bar)	(psi)	(bar)	(psi)	(bar)	(psi)		
	6/4	2,5	0,15	12	174	12	174	4	58	4	58	0,17	8315000.98xx.xxxxx
	6/4	3,5	0,18	4	58	4	58	–	–	–	–	0,17	8315001.98xx.xxxxx
	8/6	4,5	0,45	3	43	3	43	–	–	–	–	0,17	8315002.98xx.xxxxx
	6/4	2,5	0,15	4	58	4	58	–	–	–	–	0,17	8315003.98xx.xxxxx
	4 PIF 4*)	2,5	0,15	12	174	12	174	4	58	4	58	0,17	8315020.98xx.xxxxx
	4 PIF 4*)	3,5	0,15	4	58	4	58	–	–	–	–	0,17	8315021.98xx.xxxxx
	4 PIF 4*)	2,5	0,15	4	58	4	58	–	–	–	–	0,17	8315023.98xx.xxxxx

xxxxx Please insert voltage and frequency codes

*1) Cv-value (US) ≈ kv value x 1,2

*2) For gases and liquid fluids up to 25 mm²/s (cSt)

*3) Valve only (without coil)

*4) PIF = Push-in fitting

Valve design 00, 01, 03 compression fitting ø 6 mm

Valve design 02 compression fitting ø 8 mm

Valve design 20 ... 23 push-in fitting ø 4 mm

Electrical details for all solenoid systems

According to DIN VDE 0580 at a solenoid temperature of +20°C (+68°F).

At operating state temperature the input power of a coil decreases by up to ca. 30% due to physical reasons.

84360

2/2-way valves – Solenoid actuated, with forced lifting

Port size: G1/4 ... 2

Orifice: DN 8 ... 50

Valve operates without differential pressure

High flow rate

Easily interchangeable solenoid

*NPT-connection available:
change 84360 to 84370*



Technical data

Medium:

Hot water, steam

Switching function:

Normally closed

Operation:

Solenoid actuated,
with forced lifting

Mounting position:

Optional, preferably solenoid
vertical on top

Flow direction:

Determined

Port size:

G1/4, G3/8, G1/2, G3/4, G1,
G1 1/4, G1 1/2, G2

Operating pressure:

0 ... 10 bar (0 ... 145 psi)

Fluid temperature:

0 ... +150°C (+14 ... +302°F)

Ambient temperature:

0 ... +60°C (+14 ... +140°F)

Material:

Body: Brass

Seat seal: HNBR

Internal parts: Brass, stainless
steel

For contaminated fluids insertion
of a strainer is recommended.

Standard models

Symbol	Port size	Orifice (mm)	Flow kv value *1)	Operating pressure (bar)	Operating pressure (psi)	Weight (kg)	Model Solenoid in V d.c.	Model Solenoid in V a.c.
	G1/4	8	1,9	0 ... 10	0 ... 145	1,3	8436000.8302.xxxxx	8436000.8306.xxxxx
	G3/8	10	3	0 ... 10	0 ... 145	1,3	8436100.8302.xxxxx	8436100.8306.xxxxx
	G1/2	12	3,8	0 ... 10	0 ... 145	1,3	8436200.8302.xxxxx	8436200.8306.xxxxx
	G3/4	20	6,1	0 ... 10	0 ... 145	1,9	8436300.8302.xxxxx	8436300.8306.xxxxx
	G1	25	9,5	0 ... 10	0 ... 145	1,9	8436400.8302.xxxxx	8436400.8306.xxxxx
	G1 1/4	32	23	0 ... 10	0 ... 145	5,1	8436500.8402.xxxxx	8436500.8406.xxxxx
	G1 1/2	40	25	0 ... 10	0 ... 145	4,8	8436600.8402.xxxxx	8436600.8406.xxxxx
	G2	50	41	0 ... 10	0 ... 145	6,1	8436700.8402.xxxxx	8436700.8406.xxxxx

xxxxx Please insert voltage and frequency codes

*1) Cv-value (US) \approx kv value x 1,2

Standard solenoid systems

Voltage and Frequency Solenoid 8302/8306					
Code Voltage	Code Frequency	Voltage	Frequency	Power consumption Inrush	Power consumption Holding
024	00	24 V d.c.	-	14 W	14 W
024	49	24 V a.c. *2)	40 ... 60 Hz	16 VA	16 VA
110	49	110 V a.c. *2)	40 ... 60 Hz	16 VA	16 VA
120	49	120 V a.c. *2)	40 ... 60 Hz	16 VA	16 VA
230	49	230 V a.c. *2)	40 ... 60 Hz	16 VA	16 VA
Voltage and Frequency Solenoid 8402/8406					
024	00	24 V d.c.	-	29 W	29 W
024	49	24 V a.c. *2)	40 ... 60 Hz	33 VA	33 VA
110	49	110 V a.c. *2)	40 ... 60 Hz	33 VA	33 VA
120	49	120 V a.c. *2)	40 ... 60 Hz	33 VA	33 VA
230	49	230 V a.c. *2)	40 ... 60 Hz	33 VA	33 VA

*2) A.c. only with rectifier plug

Further versions on request!

Electrical details for all solenoid systems

Design	DIN VDE 0580
Voltage range	$\pm 10\%$
Duty cycle	100% ED
Protection class	EN 60529 IP65
Socket	Form A acc. to DIN EN 175301-803 (included)

According to DIN VDE 0580 at a solenoid temperature of +20°C (+68°F).
At operating state temperature the input power of a coil decreases by up to
ca. 30% due to physical reasons.

85340

2/2-way valves – Solenoid actuated, with forced lifting

Port size: Flange PN 40

Orifice: DN 15 ... 50

**Up to 16 bar backpressure tight
with leakage rate E according to DIN EN 12266-1**

Valve operates without differential pressure



Stainless Steel



Technical data

Medium:

Slightly aggressive fluids

Switching function:

Normally closed;
no switching function at back
pressure

Operation:

Solenoid actuated,
with forced lifting

Mounting position:

Solenoid vertical on top

Flow direction:

Determined

Port size:

Flange PN 40,
DN 15, DN 20, DN 25,
DN 32, DN 40, DN 50

Operating pressure:

P > A: 0 ... 25 bar (0 ... 362 psi)

A > P: 0 ... 16 bar (0 ... 232 psi),
backpressure tight

Fluid temperature:

0 ... +90°C (+32 ... +194°F)

Ambient temperature:

0 ... +50°C (+32 ... +122°F)

Material:

Body: Stainless steel (1.4408)

Seat seal: NBR

Internal parts: Stainless steel

For contaminated fluids insertion
of a strainer is recommended.

Standard models

Symbol	Orifice (mm)	Flow kv value *1) (m³/h)	Operating pressure *2) (bar)	Operating pressure *2) (psi)	Weight (kg)	Model Solenoid in V d.c.	Model Solenoid in V a.c.
	15	4,4	0 ... 25	0 ... 362	3,8	8534200.8401.xxxxx	8534200.8404.xxxxx
	20	7	0 ... 25	0 ... 362	4,2	8534300.8401.xxxxx	8534300.8404.xxxxx
	25	10,5	0 ... 25	0 ... 362	4,8	8534400.8401.xxxxx	8534400.8404.xxxxx
	32	25	0 ... 25	0 ... 362	9,6	8534500.9501.xxxxx	8534500.9504.xxxxx
	40	27	0 ... 25	0 ... 362	10	8534600.9501.xxxxx	8534600.9504.xxxxx
	50	43	0 ... 25	0 ... 362	11,5	8534700.9501.xxxxx	8534700.9504.xxxxx

xxxxx Please insert voltage and frequency codes

*1) Cv-value (US) \approx kv value x 1,2

*2) For gases and liquid fluids up to 25 mm²/s (cSt)

Up to 80 mm²/s (cSt) on request

85340

2/2-way valves – Solenoid actuated, with forced lifting

Standard solenoid systems

Voltage and Frequency Solenoid 8401/8404					
Code Voltage	Code Frequency	Voltage	Frequency	Power consumption	
				Inrush	Holding
024	00	24 V d.c.	-	40 W	40 W
024	49	24 V a.c. *3)	40 ... 60 Hz	45 VA	45 VA
110	49	110 V a.c. *3)	40 ... 60 Hz	45 VA	45 VA
120	49	120 V a.c. *3)	40 ... 60 Hz	45 VA	45 VA
220	49	220 V a.c. *3)	40 ... 60 Hz	45 VA	45 VA
230	49	230 V a.c. *3)	40 ... 60 Hz	45 VA	45 VA
Voltage and Frequency Solenoid 9501/9504					
024	00	24 V d.c.	-	80 W	80 W
024	49	24 V a.c. *3)	40 ... 60 Hz	89 VA	89 VA
110	49	110 V a.c. *3)	40 ... 60 Hz	89 VA	89 VA
120	49	120 V a.c. *3)	40 ... 60 Hz	89 VA	89 VA
220	49	220 V a.c. *3)	40 ... 60 Hz	89 VA	89 VA
230	49	230 V a.c. *3)	40 ... 60 Hz	89 VA	89 VA

*3) a.c. only with rectifier plug

Further versions on request!

Electrical details for all solenoid systems

Design	DIN VDE 0580
Voltage range	±10%
Duty cycle	100% ED
Protection class	EN 60529 IP65
Socket	Form A acc. to DIN EN 175301-803 (included)

According to DIN VDE 0580 at a solenoid temperature of +20°C.

At operating state temperature the input power of a coil decreases by up to ca. 30% due to physical reasons.

Additional solenoid systems for hazardous areas

ATEX category	ATEX protection class	IP protection class	Solenoid	Standard voltages
II 3G II 3D	Ex ec IIC T4 Gc Ex tc IIIC T130°C DC	IP65	8426 *4)	24 V d.c.
II 2G	Ex d IIC T4/T5 Ex tD A21 IP65 T130°C resp. T95°C	IP65	8920	24 V d.c., 110 V a.c., 230 V a.c.
II 2GD	Ex e mb II T3/T4 Ex tD A21 IP65 T140°C	IP65	9540	24 V d.c., 110 V a.c., 230 V a.c.
II 2G II 2D	Ex eb mb IIC T3 Gb Ex mb tb IIIB T140°C Db	IP66	6240	24 V d.c., 110 V a.c., 230 V a.c.

Attention!

The conditions imposed on the Ex approvals lead to reduction of the permissible standard temperature ranges in the cases of explosion protected solenoids.

*4) Only d.c. for a.c. solenoids with design inspection certificate
acc. to category 2, e.g. 8920/ 9540/ 6240

85780

2/2-way valves – Solenoid actuated, with forced lifting

Port size: Flange PN 40

Orifice: DN 15 ... 100

Suitable for use in single-channel safety-related systems in accordance with DIN EN 61508/61511 up to and including SIL 2 and up to and including SIL 3 in multi-channel systems

Damped operation

Valve operates without differential pressure



DN 15 ... 50

DN 65 ... 100

Stainless Steel



Technical data

Medium:

Neutral gases and liquid fluids (air, water, gases according to DVGW datasheet G 260 with seat seal FPM – oils and other fluids on request)

Switching function:

Normally closed

Operation:

Solenoid actuated, with forced lifting

Mounting position:

Optional, preferably solenoid vertical on top

Flow direction:

Determined

Port size:

Flange PN 40, DN 15, DN 20, DN 25, DN 32, DN 40, DN 50, DN 65, DN 80, DN 100

Operating pressure:

0 ... 25 bar (0 ... 362 psi)

Fluid temperature:

–10 ... +60°C (+14 ... +140°F)

Ambient temperature:

–10 ... +50°C (+14 ... +122°F)

Material:

Body: up to DN 50 stainless steel (1.4408)

from DN 65 stainless steel (1.4581)

Seat seal: NBR

Internal parts: Stainless steel, PTFE / carbon

For contaminated fluids insertion of a strainer is recommended.

Standard models

Symbol	Orifice (mm)	Flow kv value *1) (m³/h)	Operating pressure *2) (bar)	(psi)	Weight (kg)	Model Solenoid in V d.c.	Model Solenoid in V a.c.
	15	3,7	0 ... 25	0 ... 362	4,2	8578200.8401.xxxxx	8578200.8404.xxxxx
	20	5,6	0 ... 25	0 ... 362	4,6	8578300.8401.xxxxx	8578300.8404.xxxxx
	25	7,8	0 ... 25	0 ... 362	5,1	8578400.8401.xxxxx	8578400.8404.xxxxx
	32	18	0 ... 25	0 ... 362	9,6	8578500.8401.xxxxx	8578500.8404.xxxxx
	40	24,4	0 ... 25	0 ... 362	10	8578600.8401.xxxxx	8578600.8404.xxxxx
	50	31,8	0 ... 25	0 ... 362	11,5	8578700.8401.xxxxx	8578700.8404.xxxxx
	65	67	0 ... 25	0 ... 362	36,5	8578800.9501.xxxxx	8578800.9504.xxxxx
	80	94	0 ... 25	0 ... 362	46,5	8578900.9501.xxxxx	8578900.9504.xxxxx
	100	144	0 ... 25	0 ... 362	70	8579000.9501.xxxxx	8579000.9504.xxxxx

xxxxx Spannung und Frequenz angeben

*1) Cv-Wert (US) ≈ kv-Wert x 1,2

*2) For gases and liquid fluids up to 60 mm²/s (cSt)

85780

2/2-way valves – Solenoid actuated, with forced lifting

Standard solenoid systems

Voltage and Frequency Solenoid 8401/8404					
Code Voltage	Code Frequency	Voltage	Frequency	Power consumption	
				Inrush	Holding
024	00	24 V d.c.	-	40 W	40 W
024	49	24 V a.c. *3)	40 ... 60 Hz	45 VA	45 VA
110	49	110 V a.c. *3)	40 ... 60 Hz	45 VA	45 VA
120	49	120 V a.c. *3)	40 ... 60 Hz	45 VA	45 VA
230	49	230 V a.c. *3)	40 ... 60 Hz	45 VA	45 VA
Voltage and Frequency Solenoid 9501/9504					
024	00	24 V d.c.	-	80 W	80 W
024	49	24 V a.c. *3)	40 ... 60 Hz	89 VA	89 VA
110	49	110 V a.c. *3)	40 ... 60 Hz	89 VA	89 VA
120	49	120 V a.c. *3)	40 ... 60 Hz	89 VA	89 VA
230	49	230 V a.c. *3)	40 ... 60 Hz	89 VA	89 VA

*1) a.c. only with rectifier plug

Further versions on request!

Electrical details for all solenoid systems

Design	DIN VDE 0580
Voltage range	±10%
Duty cycle	100% ED
Protection class	EN 60529 IP65
Socket	Form A acc. to DIN EN 175301-803 (included)

According to DIN VDE 0580 at a solenoid temperature of +20°C.

At operating state temperature the input power of a coil decreases by up to ca. 30% due to physical reasons.

Additional solenoid systems for hazardous areas

ATEX category	ATEX protection class	IP protection class	Solenoid	Standard voltages
II 2G II 2D	Ex de IIC T4/T5 Ex tD A21 IP65 T130°C resp. T95°C	IP65	8900	24 V d.c., 110 V a.c., 230 V a.c.
II 2G II 2D	Ex d IIC T4/T5 Ex tD A21 IP65 T130°C resp. T95°C	IP65	8920	24 V d.c.
II 3G II 3D	Ex ec IIC T4 Gc Ex tc IIIC T130°C DC	IP65	8426 *4)	24 V d.c., 110 V a.c., 230 V a.c.
II 2G II 2D	Ex e mb II T3/T4 Ex tD A21 IP65 T140°C	IP65	9540	24 V d.c., 110 V a.c., 230 V a.c.
II 2G II 2D	Ex eb mb IIC T3 Gb Ex mb tb IIIB T140°C Db	IP66	6240	24 V d.c., 110 V a.c., 230 V a.c.

Attention!

The conditions imposed on the Ex approvals lead to reduction of the permissible standard temperature ranges in the cases of explosion protected solenoids.

*4) Only d.c. for a.c. solenoids with design inspection certificate acc. to category 2, e.g. 8900/ 8920/ 9540/ 6240

85840

2/2-way valves – Solenoid actuated, with forced lifting

Port size: G1/4 ... 2

Orifice: DN 8 ... 50

Suitable for use in single-channel safety-related systems in accordance with DIN EN 61508/61511 up to and including SIL 2 and up to and including SIL 3 in multi-channel systems

Damped operation

Valve operates without pressure differential

*NPT-connection available:
change 85840 to 85850*



Stainless Steel



Technical data

Medium:

Air, water, gases according to DVGW datasheet G 260 with seat seal FPM, oils and other fluids on request

Switching function:

Normally closed

Operation:

Solenoid actuated, with forced lifting

Mounting position:

Solenoid vertical on top

Flow direction:

Determined

Port size:

G1/4, G3/8, G1/2, G3/4, G1, G1 1/4, G1 1/2, G2

Operating pressure:

0 ... 25 bar (0 ... 362 psi)

Fluid temperature:

–10 ... +60°C (+14 ... +140°F)

Ambient temperature:

–10 ... +50°C (+14 ... +122°F)

Material:

Body: Stainless steel (1.4408)

Seat seal: NBR

Internal parts: Stainless steel, PTFE / carbon

For contaminated fluids insertion of a strainer is recommended.

Standard models

Symbol	Port size	Orifice (mm)	Flow kv value *1) (m³/h)	Operating pressure *2) (bar)	(psi)	Weight (kg)	Model Solenoid in V d.c.	Model Solenoid in V a.c.
	G1/4	8	2	0 ... 25	0 ... 362	2,7	8584000.8401.xxxxx	8584000.8404.xxxxx
	G3/8	10	3,2	0 ... 25	0 ... 362	2,7	8584100.8401.xxxxx	8584100.8404.xxxxx
	G1/2	12	3,6	0 ... 25	0 ... 362	2,8	8584200.8401.xxxxx	8584200.8404.xxxxx
	G3/4	20	6	0 ... 25	0 ... 362	3	8584300.8401.xxxxx	8584300.8404.xxxxx
	G1	25	8,9	0 ... 25	0 ... 362	3,4	8584400.8401.xxxxx	8584400.8404.xxxxx
	G1 1/4	32	22	0 ... 25	0 ... 362	5,6	8584500.8401.xxxxx	8584500.8404.xxxxx
	G1 1/2	40	22,3	0 ... 25	0 ... 362	5,4	8584600.8401.xxxxx	8584600.8404.xxxxx
	G2	50	35	0 ... 25	0 ... 362	6,8	8584700.8401.xxxxx	8584700.8404.xxxxx

xxxxx Please insert voltage and frequency codes

*1) Cv-value (US) ≈ kv value x 1,2

*2) For gases and liquid fluids up to 25 mm²/s (cSt)

85840

2/2-way valves – Solenoid actuated, with forced lifting

Standard solenoid systems

Voltage and Frequency Solenoid 8401/8404					
Code Voltage	Code Frequency	Voltage	Frequency	Power consumption	
				Inrush	Holding
024	00	24 V d.c.	-	40 W	40 W
024	49	24 V a.c. *3)	40 ... 60 Hz	45 VA	45 VA
110	49	110 V a.c. *3)	40 ... 60 Hz	45 VA	45 VA
120	49	120 V a.c. *3)	40 ... 60 Hz	45 VA	45 VA
230	49	230 V a.c. *3)	40 ... 60 Hz	45 VA	45 VA

*3) a.c. with rectifier plug

Further versions on request!

Electrical details for all solenoid systems

Design	DIN VDE 0580
Voltage range	±10%
Duty cycle	100% ED
Protection class	EN 60529 IP65
Socket	Form A acc. to DIN EN 175301-803 (included)

According to DIN VDE 0580 at a solenoid temperature of +20°C.

At operating state temperature the input power of a coil decreases by up to ca. 30% due to physical reasons.

Additional solenoid systems for hazardous areas

ATEX category	ATEX protection class	IP protection class	Solenoid	Standard voltages
II 2G II 2D	Ex de IIC T4/T5 Ex tD A21 IP65 T130°C resp. T95°C	IP65	8900	24 V d.c., 110 V a.c., 230 V a.c.
II 2G II 2D	Ex d IIC T4/T5 Ex tD A21 IP65 T130°C resp. T95°C	IP65	8920	24 V d.c., 110 V a.c., 230 V a.c.
II 3G II 3D	Ex ec IIC T4 Gc Ex tc IIIC T130°C DC	IP65	8426 *4)	24 V d.c.
II 2G II 2D	Ex eb mb IIC T3 Gb Ex mb tb IIIB T140°C Db	IP66	6240	24 V d.c., 110 V a.c., 230 V a.c.

Attention!

The conditions imposed on the Ex approvals lead to reduction of the permissible standard temperature ranges in the cases of explosion protected solenoids.

*4) only DC, for AC solenoids with design inspection certificate acc. to category 2, e.g. 8900/ 8920/ 6240

86480

2/2-way valves – Solenoid actuated, with forced lifting

Port size: Flange PN 16

Orifice: DN 65 ... 100

Valve operates without differential pressure (Zero delta P)

Valve piston with PTFE guide-ring

Suitable for vacuum

Adjustable: Damped operation



Technical data

Medium:

Neutral gases and fluids

Switching function:

Normally closed

Operation:

Solenoid actuated,
with forced lifting

Mounting position:

Solenoid vertical on top

Flow direction:

Determined

Port size:

Flange PN 16,
DN 65, DN 80, DN 100

Operating pressure:

0 ... 16 bar (0 ... 232 psi)

Fluid temperature:

–20 ... +90°C (–4 ... +194°F)

Ambient temperature:

–20 ... +50°C (–4 ... +122°F)

Material:

Body: Ductile graphite iron, brass


Seat seal: NBR

Cover: Brass

Internal parts: Stainless steel,
PTFE/coal

For contaminated fluids insertion
of a strainer is recommended.

Standard models

Symbol	Orifice (mm)	Flow kv value *1) (m³/h)	Operating pressure *2) *3) (bar)	Operating pressure *2) *3) (psi)	Weight (kg)	Model Solenoid in V d.c.	Model Solenoid in V a.c.
	65	72	0 ... 16	0 ... 232	30	8648800.9501.xxxxx	8648800.9504.xxxxx
	80	110	0 ... 16	0 ... 232	49	8648900.9501.xxxxx	8648900.9504.xxxxx
	100	125	0 ... 16	0 ... 232	60	8649000.9501.xxxxx	8649000.9504.xxxxx

xxxxx Please insert voltage and frequency codes

*1) Cv-value (US) ≈ kv value x 1,2

*2) For gases and liquid fluids up to 40 mm²/s (cSt)

Standard solenoid systems

Voltage and Frequency Solenoid 9501/9504					
Code Voltage	Code Frequency	Voltage	Frequency	Power consumption	
				Inrush	Holding
024	00	24 V d.c.	-	80 W	80 W
024	49	24 V a.c. *3)	40 ... 60 Hz	89 VA	89 VA
042	49	42 V a.c. *3)	40 ... 60 Hz	89 VA	89 VA
110	49	110 V a.c. *3)	40 ... 60 Hz	89 VA	89 VA
230	49	230 V a.c. *3)	40 ... 60 Hz	89 VA	89 VA

*3) AC only with rectifier plug

Further versions on request!

Electrical details for all solenoid systems

Design	DIN VDE 0580
Voltage range	±10%
Duty cycle	100% ED
Protection class	EN 60529 IP 65
Socket	Form A acc. to DIN EN 175301-803 (included)

According to DIN VDE 0580 at a solenoid temperature of +20°C.

At operating state temperature the input power of a coil decreases by up to
ca. 30% due to physical reasons.

Additional solenoid systems for hazardous areas

ATEX category	Protection class	Solenoid	Standard voltages
II2GD	II 2 G Ex e mb II T3...T4 II 2 D Ex tD A21 IP 65 T140°C	9540	24 V d.c., 110 V a.c., 230 V a.c.

Attention!

The conditions imposed on the Ex approvals lead to reduction of the permissible
standard temperature ranges in the cases of explosion protected solenoids.

86500

2/2-way valves – Solenoid actuated, with forced lifting

Port size: Flange PN 40


Orifice: DN 15 ... 100

Valve operates without differential pressure (Zero delta P)

Valve piston with PTFE guide-ring

Suitable for vacuum

Adjustable: Damped operation (DN 65 ... 100)

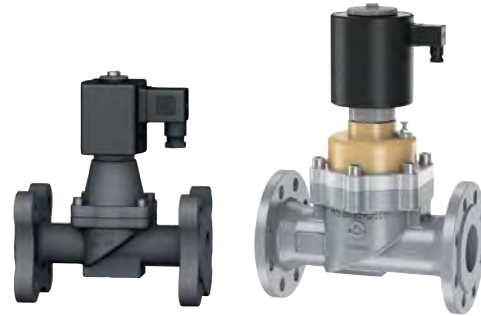

DN 15 ... 50

DN 65 ... 100



Technical data

Medium:

Neutral gases and liquids

Switching function:

Normally closed

Operation:

Solenoid actuated,
with forced lifting

Mounting position:

Optional, preferably solenoid
vertical on top

up to DN 65:

solenoid vertical on top

Flow direction:

Determined

Port size:

Flange PN 40,
DN 15, DN 20, DN 25,
DN 32, DN 40, DN 50,
DN 65, DN 80, DN 100

Operating pressure:

0 ... 25 bar (0 ... 362 psi)

Fluid temperature:

–20 ... +90°C (–4 ... +194°F)

Ambient temperature:

–20 ... +50°C (–4 ... +122°F)

Material:

DN 15 ... 50

Body: Cast steel, Brass

Seat seal: NBR

Internal parts: Stainless steel,

PTFE/Carbon, Brass

DN 65 ... 100

Body: Ductile graphite iron, Brass

Seat seal: NBR

Internal parts: Stainless steel,

PTFE/Carbon

For contaminated fluids insertion
of a strainer is recommended.

Standard models

Symbol	Orifice (mm)	Flow kv value *1) (m³/h)	Operating pressure *2) (bar)	(psi)	Weight (kg)	Model Solenoid in V d.c.	Model Solenoid in V a.c.
	15	4,4	0 ... 25	0 ... 362	3,8	8650200.8301.xxxxx	8650200.8304.xxxxx
	20	7	0 ... 25	0 ... 362	4,2	8650300.8301.xxxxx	8650300.8304.xxxxx
	25	10,5	0 ... 25	0 ... 362	4,8	8650400.8301.xxxxx	8650400.8304.xxxxx
	32	25	0 ... 25	0 ... 362	9,6	8650500.8401.xxxxx	8650500.8404.xxxxx
	40	27	0 ... 25	0 ... 362	10	8650600.8401.xxxxx	8650600.8404.xxxxx
	50	43	0 ... 25	0 ... 362	11,5	8650700.8401.xxxxx	8650700.8404.xxxxx
	65	72	0 ... 25	0 ... 362	30	8650800.9501.xxxxx	8650800.9504.xxxxx
	80	110	0 ... 25	0 ... 362	49	8650900.9501.xxxxx	8650900.9504.xxxxx
	100	125	0 ... 25	0 ... 362	60	8651000.9501.xxxxx	8651000.9504.xxxxx

xxxxx Please insert voltage and frequency codes

*1) Cv-value (US) \approx kv value \times 1,2

*2) For gases and liquid fluids up to 40 mm²/s (cSt)

Standard solenoid systems

Voltage and Frequency Solenoid 8301/8304					
Code Voltage	Code Frequency	Voltage	Frequency	Power consumption	
				Inrush	Holding
024	00	24 V d.c.	-	22 W	22 W
024	49	24 V a.c. 3*)	40 ... 60 Hz	25 VA	25 VA
110	49	110 V a.c. 3*)	40 ... 60 Hz	25 VA	25 VA
120	49	120 V a.c. 3*)	40 ... 60 Hz	25 VA	25 VA
230	49	230 V a.c. 3*)	40 ... 60 Hz	25 VA	25 VA
Voltage and Frequency Solenoid 8401/8404)					
024	00	24 V d.c.	-	40 W	40 W
024	49	24 V a.c. 3*)	40 ... 60 Hz	45 VA	45 VA
110	49	110 V a.c. 3*)	40 ... 60 Hz	45 VA	45 VA
120	49	120 V a.c. 3*)	40 ... 60 Hz	45 VA	45 VA
230	49	230 V a.c. 3*)	40 ... 60 Hz	45 VA	45 VA
Voltage and Frequency Solenoid 9501/9504					
024	00	24 V d.c.	-	80 W	80 W
024	49	24 V a.c. 3*)	40 ... 60 Hz	89 VA	89 VA
110	49	110 V a.c. 3*)	40 ... 60 Hz	89 VA	89 VA
120	49	120 V a.c. 3*)	40 ... 60 Hz	89 VA	89 VA
230	49	230 V a.c. 3*)	40 ... 60 Hz	89 VA	89 VA

3*) a.c. only with rectifier plug

Further versions on request!

Electrical details for all solenoid systems

Design	DIN VDE 0580
Voltage range	±10%
Duty cycle	100% ED
Protection class	EN 60529 IP 65
Socket	Form A acc. to DIN EN 175301-803 (included)

According to DIN VDE 0580 at a solenoid temperature of +20°C.

At operating state temperature the input power of a coil decreases by up to ca. 30% due to physical reasons.

Additional solenoid systems for hazardous areas

ATEX category	ATEX protection class	IP protection class	So-lenoid	Standard voltages
II 3G II 3D	Ex ec IIC T4 Gc Ex tc IIIC T130°C DC	IP65	8326 *4)	24 V d.c.
II 3G II 3D	Ex ec IIC T4 Gc Ex tc IIIC T130°C DC	IP65	8426 *4)	24 V d.c.
II2GD	Ex d IIC T4/T5 Ex tD A21 T130°C/95°C	IP65	8920	24 V d.c., 110 V a.c., 230 V a.c.
II 2G II 2D	Ex eb mb IIC T3 Gb Ex mb tb IIIB T135°C Db	IP66	6220	24 V DC, 110 V AC, 230 V AC
II 2G II 2D	Ex eb mb IIC T3 Gb Ex mb tb IIIB T140°C Db	IP66	6240	24 V d.c., 110 V a.c., 230 V a.c.
II2GD	II 2G Ex e mb II T3...T4 II 2D Ex tD A21 IP65 T140°C	IP65	9540	24 V d.c., 110 V a.c., 230 V a.c.

Attention!

The conditions imposed on the Ex approvals lead to reduction of the permissible standard temperature ranges in the cases of explosion protected solenoids.

*4) Only d.c., for a.c. solenoids with design inspection certificate acc. to category 2, e.g. 6240/ 8920/ 9540

86520

2/2-way valves – Solenoid actuated, with forced lifting

Port size: Flange PN 40


Orifice: DN 15 ... 50

For steam and hot water

Damped operation

Valve operates without differential pressure

Valve piston with PTFE guide-ring



Technical data

Medium:

Neutral steam and liquid fluids

Switching function:

Normally closed

Mounting position:

Solenoid vertical on top;

optional up to G1 / 1 NPT;

solenoid underneath

Flow direction:

Determined

Port size:

Flange PN 40

DN 15, DN 20, DN 25, DN 32,
DN 40, DN 50

Operating pressure:

0 ... 16 bar (0 ... 232 psi)

0 ... 25 bar (0 ... 362 psi)

Fluid temperature:

0 ... +200°C (+32 ... +392°F)

Ambient temperature:

0 ... +60°C (+32 ... +140°F)

Materials:

Body: Stainless steel (1.4408),

Brass

Seat seal: PTFE

Internal parts: Stainless steel,
PTFE-Carbon / FPM

For contaminated fluids insertion
of a strainer is recommended.

Standard models

Symbol	Orifice (mm)	Operating pressure *2) *3)		Flow kv value *1)	Weight (kg)	Model	
		(bar)	(psi)	(m³/h)		Solenoid in V d.c.	Solenoid in V a.c.
	15	0 ... 16	0 ... 232	4.4	3,8	8652200.8402.xxxxx	8652200.8406.xxxxx
	20	0 ... 16	0 ... 232	6.5	4,2	8652300.8402.xxxxx	8652300.8406.xxxxx
	25	0 ... 16	0 ... 232	10	4,8	8652400.8402.xxxxx	8652400.8406.xxxxx
	32	0 ... 16	0 ... 232	22	9,6	8652500.8402.xxxxx	8652500.8406.xxxxx
	40	0 ... 16	0 ... 232	23	10	8652600.8402.xxxxx	8652600.8406.xxxxx
	50	0 ... 16	0 ... 232	37	11,5	8652700.8402.xxxxx	8652700.8406.xxxxx

xxxxx Please insert voltage and frequency codes

*1) Cv-value (US) ≈ kv value x 1,2

*2) For gases and liquid fluids up to 40 mm²/s (cSt)

*3) Leakage E acc. to DIN EN 12266-1

Standard solenoid systems

Voltage and Frequency Solenoid 8402/8406					
Code Voltage	Code Frequency	Voltage	Frequency	Power consumption	
				Inrush	Holding
024	00	24 V d.c.	-	29 W	29 W
024	49	24 V a.c. *4)	40 ... 60 Hz	33 VA	33 VA
110	49	110 V a.c. *4)	40 ... 60 Hz	33 VA	33 VA
120	49	120 V a.c. *4)	40 ... 60 Hz	33 VA	33 VA
230	49	230 V a.c. *4)	40 ... 60 Hz	33 VA	33 VA

*4) a.c. only with rectifier plug

Further versions on request!

Electrical details for all solenoid systems

Design	DIN VDE 0580
Voltage range	±10%
Duty cycle	100% ED
Protection class	EN 60529 IP65
Socket	Form A acc. to DIN EN 175301-803 (included)

According to DIN VDE 0580 at a solenoid temperature of +20°C.

At operating state temperature the input power of a coil decreases by up to
ca. 30% due to physical reasons.

86540

2/2-way valves – Solenoid actuated, with forced lifting

Port size: Flange PN 40


Orifice: DN 15 ... 100

Valve operates without differential pressure (Zero delta P)

Valve piston with PTFE guide-ring

Suitable for vacuum

Adjustable: Damped operation (DN 65 ... 100)

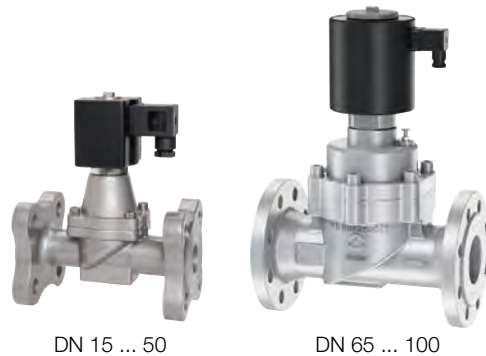

Stainless Steel



Technical data

Medium:

Slightly aggressive gases and liquid fluids

Switching function:

Normally closed

Operation:

Solenoid actuated, with forced lifting

Mounting position:

Optional, preferably solenoid vertical on top

up to DN 65:

solenoid vertical on top

Flow direction:

Determined

Port size:

Flange PN 40,
DN 15, DN 20, DN 25,
DN 32, DN 40, DN 50,
DN 65, DN 80, DN 100

Operating pressure:

0 ... 25 bar (0 ... 362 psi)

Fluid temperature:

–20 ... +90°C (–4 ... +194°F)

Ambient temperature:

–20 ... +50°C (–4 ... +122°F)

Material:

Body: Stainless steel (1.4408)

Seat seal: NBR

Internal parts: Stainless steel,
PTFE/carbon

For contaminated fluids insertion of a strainer is recommended.

Standard models

Symbol	Orifice (mm)	Flow kv value *1 (m³/h)	Operating pressure *2) *3) (bar)	(psi)	Weight (kg)	Model Solenoid in V d.c.	Model Solenoid in V a.c.
	15	4,4	0 ... 25	0 ... 362	3	8654200.8301.xxxxx	8654200.8304.xxxxx
	20	6,5	0 ... 25	0 ... 362	3,5	8654300.8301.xxxxx	8654300.8304.xxxxx
	25	10	0 ... 25	0 ... 362	4,1	8654400.8301.xxxxx	8654400.8304.xxxxx
	32	24	0 ... 25	0 ... 362	9,6	8654500.8401.xxxxx	8654500.8404.xxxxx
	40	25	0 ... 25	0 ... 362	10	8654600.8401.xxxxx	8654600.8404.xxxxx
	50	41	0 ... 25	0 ... 362	11,5	8654700.8401.xxxxx	8654700.8404.xxxxx
	65	72	0 ... 25	0 ... 362	30	8654800.9501.xxxxx	8654800.9504.xxxxx
	80	90	0 ... 25	0 ... 362	49	8654900.9501.xxxxx	8654900.9504.xxxxx
	100	125	0 ... 25	0 ... 362	60	8655000.9501.xxxxx	8655000.9504.xxxxx

xxxxx Please insert voltage and frequency codes

*1) Cv-value (US) ≈ kv value x 1,2

*2) For gases and liquid fluids up to 40 mm²/s (cSt)

86540

2/2-way valves – Solenoid actuated, with forced lifting

Standard solenoid systems

Voltage and Frequency Solenoid 8301/8304 *3)					
Code Voltage	Code Frequency	Voltage	Frequency	Power consumption	
				Inrush	Holding
024	00	24 V d.c.	-	22 W	22 W
024	49	24 V a.c. *3)	40 ... 60 Hz	25 VA	25 VA
110	49	110 V a.c. *3)	40 ... 60 Hz	25 VA	25 VA
120	49	120 V a.c. *3)	40 ... 60 Hz	25 VA	25 VA
230	49	230 V a.c. *3)	40 ... 60 Hz	25 VA	25 VA
Voltage and Frequency Solenoid 8401/8404 *3)					
024	00	24 V d.c.	-	40 W	40 W
024	49	24 V a.c. *3)	40 ... 60 Hz	45 VA	45 VA
110	49	110 V a.c. *3)	40 ... 60 Hz	45 VA	45 VA
120	49	120 V a.c. *3)	40 ... 60 Hz	45 VA	45 VA
230	49	230 V a.c. *3)	40 ... 60 Hz	45 VA	45 VA
Voltage and Frequency Solenoid 9501/9504 *3)					
024	00	24 V d.c.	-	80 W	80 W
024	49	24 V a.c. *3)	40 ... 60 Hz	89 VA	89 VA
110	49	110 V a.c. *3)	40 ... 60 Hz	89 VA	89 VA
120	49	120 V a.c. *3)	40 ... 60 Hz	89 VA	89 VA
230	49	230 V a.c. *3)	40 ... 60 Hz	89 VA	89 VA

*3) a.c. only with rectifier plug

Further versions on request!

Electrical details for all solenoid systems

Design	DIN VDE 0580
Voltage range	±10%
Duty cycle	100% ED
Protection class	EN 60529 IP65
Socket	Form A acc. to DIN EN 175301-803 (included)

According to DIN VDE 0580 at a solenoid temperature of +20°C.

At operating state temperature the input power of a coil decreases by up to ca. 30% due to physical reasons.

Additional solenoid systems for hazardous areas

ATEX category	ATEX protection class	IP protection class	So-lenoid	Standard voltages
II 3G II 3D	Ex ec IIC T4 Gc Ex tc IIIC T130°C DC	IP65	8326 *4)	24 V d.c.
II 3G II 3D	Ex ec IIC T4 Gc Ex tc IIIC T130°C DC	IP65	8426 *4)	24 V d.c.
II 2G II 2D	Ex d IIC T4/T5 Ex tD A21 T130°C/95°C	IP65	8920	24 V d.c., 110 V a.c., 230 V a.c.
II 2G II 2D	Ex eb mb IIC T3 Gb Ex mb tb IIIB T135°C Db	IP66	6220	24 V DC, 110 V AC, 230 V AC
II 2G II 2D	Ex eb mb IIC T3 Gb Ex mb tb IIIB T140°C Db	IP66	6240	24 V d.c., 110 V a.c., 230 V a.c.
II 2G II 2D	II 2G Ex e mb II T3...T4 II 2D Ex tD A21 IP65 T140°C	IP65	9540	24 V d.c., 110 V a.c., 230 V a.c.

Attention!

The conditions imposed on the Ex approvals lead to reduction of the permissible standard temperature ranges in the cases of explosion protected solenoids.

*4) Only d.c., for a.c. solenoids with design inspection certificate acc. to category 2, e.g. 6240

86580

2/2-way valves – Solenoid actuated, with forced lifting

Port size: Flange PN 40

Orifice: DN 15 ... 50

Valve with PTFE piston guide rings

**With inspection certificate DIN EN 10204 - 3.1
Requirements AD 2000 A4**

Damped operation

Valve operates without differential pressure



Stainless Steel



Technical data

Medium:

Slightly aggressive gases
and liquid fluids

Switching function:

Normally closed

Operation:

Solenoid actuated,
with forced lifting

Mounting position:

Optional, preferably solenoid
vertical on top

Flow direction:

Determined

Port size:

Flange PN 40,
DN 15, DN 20, DN 25,
DN 32, DN 40, DN 50

Operating pressure:

0 ... 25 bar (0 ... 362 psi)

Fluid temperature:

–20 ... +90°C (–4 ... +194°F)

Ambient temperature:

–20 ... +50°C (–4 ... +122°F)

Material:

Body: Stainless steel (1.4408)

Seat seal: NBR

Internal parts: Stainless steel

For contaminated fluids insertion
of a strainer is recommended.

Standard models

Symbol	Orifice (mm)	Flow kv value *1) (m³/h)	Operating pressure *2) (bar)	(psi)	Weight (kg)	Model Solenoid in V d.c.	Model Solenoid in V a.c.
	15	4,4	0 ... 25	0 ... 362	4,2	8658200.8401.xxxxx	8658200.8404.xxxxx
	20	7	0 ... 25	0 ... 362	4,6	8658300.8401.xxxxx	8658300.8404.xxxxx
	25	10,5	0 ... 25	0 ... 362	5,1	8658400.8401.xxxxx	8658400.8404.xxxxx
	32	25	0 ... 25	0 ... 362	9,6	8658500.8401.xxxxx	8658500.8404.xxxxx
	40	27	0 ... 25	0 ... 362	10	8658600.8401.xxxxx	8658600.8404.xxxxx
	50	43	0 ... 25	0 ... 362	11,5	8658700.8401.xxxxx	8658700.8404.xxxxx

xxxxx Please insert voltage and frequency codes

*1) Cv-value (US) ≈ kv value x 1,2

*2) For gases and liquid fluids up to 60 mm²/s (cSt)

Standard solenoid systems

Voltage and Frequency Solenoid 8401/8404					
Code Voltage	Code Frequency	Voltage	Frequency	Power consumption Inrush	Holding
024	00	24 V d.c.	-	40 W	40 W
024	49	24 V a.c. *3)	40 ... 60 Hz	45 VA	45 VA
110	49	110 V a.c. *3)	40 ... 60 Hz	45 VA	45 VA
120	49	120 V a.c. *3)	40 ... 60 Hz	45 VA	45 VA
230	49	230 V a.c. *3)	40 ... 60 Hz	45 VA	45 VA

*3) a.c. only with rectifier plug

*4) d.c. only, for a.c. solenoids with design inspection certificate acc.
to category 2, e. g. xxxxxx.8441

Further versions on request!

Electrical details for all solenoid systems

Operation	DIN VDE 0580
Voltage range	±10%
Duty cycle	100% ED
Protection class	EN 60529 IP65
Socket	Form A acc. to DIN EN 175301-803 (included)

According to DIN VDE 0580 at a solenoid temperature of +20°C.

At operating state temperature the input power of a coil decreases by up
to ca. 30% due to physical reasons.

Additional solenoid systems for hazardous areas

ATEX category	Protection class	Sole- noid	Standard voltages
II 2G II 2D	Ex eb mb IIC T3 Gb Ex mb tb IIIB T140°C Db IP66	6240	24 V d.c., 110 V a.c., 230 V a.c.
II 3G II 3D	Ex nA IIB T4 Gc Ex tc IIIB T130°C Dc IP65	8426 *4)	24 V d.c., 110 V a.c., 230 V a.c.
II 2G II 2D	Ex d IIC T4/T5 Ex tD A21 IP65 T130°C/T95°C	8920	24 V d.c., 110 V a.c., 230 V a.c.

Attention!

The conditions imposed on the Ex approvals lead to reduction of the permissible
standard temperature ranges in the cases of explosion protected solenoids.

86580

2/2-way valves – Solenoid actuated, with forced lifting

Standard solenoid systems

Voltage and Frequency Solenoid 8401/8404					
Code Voltage	Code Frequency	Voltage	Frequency	Power consumption	
				Inrush	Holding
024	00	24 V d.c.	-	40 W	40 W
024	49	24 V a.c. *3)	40 ... 60 Hz	45 VA	45 VA
110	49	110 V a.c. *3)	40 ... 60 Hz	45 VA	45 VA
120	49	120 V a.c. *3)	40 ... 60 Hz	45 VA	45 VA
230	49	230 V a.c. *3)	40 ... 60 Hz	45 VA	45 VA

*3) A.c. only with rectifier plug

Further versions on request!

Electrical details for all solenoid systems

Design	DIN VDE 0580
Voltage range	±10%
Duty cycle	100% ED
Protection class	EN 60529 IP65
Socket	Form A acc. to DIN EN 175301-803 (included)

According to DIN VDE 0580 at a solenoid temperature of +20°C.

At operating state temperature the input power of a coil decreases by up to ca. 30% due to physical reasons.

Additional solenoid systems for hazardous areas

ATEX category	ATEX protection class	IP protection class	Solenoid	Standard voltages
II 3G II 3D	Ex ec IIC T4 Gc Ex tc IIIC T130°C DC	IP65	8426 *4)	24 V d.c.
II 2G II 2D	Ex d IIC T4/T5 Ex td A21 IP65 T130°C resp. T95°C	IP65	8920	24 V d.c., 110 V a.c., 230 V a.c.
II 2G II 2D	Ex eb mb IIC T3 Gb Ex mb tb IIIB T140°C Db	IP66	6240	24 V d.c., 110 V a.c., 230 V a.c.

Attention!

The conditions imposed on the Ex approvals lead to reduction of the permissible standard temperature ranges in the cases of explosion protected solenoids.

*4) D.c. only, for a.c. solenoids with design inspection certificate acc. to category 2, e. g. 6240 or 8920

86700

2/2-way valves – Solenoid actuated, with forced lifting

Port size: G1/4 ... 2

Orifice: DN 8 ... 50

Suitable for vacuum

Valve operates without differential pressure

Valve with PTFE piston guide rings

Damped closing

*NPT-connection available:
change 86700 to 86710*



Technical data

Medium:

Air, water and oil

Switching function:

Normally closed

Operation:

Solenoid actuated,
with forced lifting

Mounting position:

Optional, preferably solenoid
vertical on top

Flow direction:

Determined

Port size:

G1/4, G3/8, G1/2, G3/4, G1,
G1 1/4, G1 1/2, G2

Operating pressure:

0 ... 25 bar (0 ... 362 psi)
(0 ... 40 bar (0 ... 580 psi))

Fluid temperature:

–20 ... +90°C (–4 ... +194°F)

Ambient temperature:

–20 ... +50°C (–4 ... +122°F)

Material:

Body: Brass (CW617N)

Seat seal: NBR

Internal parts: Stainless steel,
PTFE / carbon

For contaminated fluids insertion
of a strainer is recommended.

Standard models

Symbol	Port size	Orifice (mm)	Flow kv value *1) (m³/h)	Operating pressure *2) (bar)	(psi)	Weight (kg)	Model Solenoid in V d.c.	Model Solenoid in V a.c.
	G1/4	8	2,2	0 ... 25	0 ... 362	1,5	8670000.8301.xxxxx	8670000.8304.xxxxx
	G3/8	10	3,4	0 ... 25	0 ... 362	1,5	8670100.8301.xxxxx	8670100.8304.xxxxx
	G1/2	12	4,4	0 ... 25	0 ... 362	1,6	8670200.8301.xxxxx	8670200.8304.xxxxx
	G3/4	20	6,5	0 ... 25	0 ... 362	1,8	8670300.8301.xxxxx	8670300.8304.xxxxx
	G1	25	10	0 ... 25	0 ... 362	2,2	8670400.8301.xxxxx	8670400.8304.xxxxx
	G1 1/4	32	24	0 ... 25	0 ... 362	5,6	8670500.8401.xxxxx	8670500.8404.xxxxx
	G1 1/2	40	25	0 ... 25	0 ... 362	5,4	8670600.8401.xxxxx	8670600.8404.xxxxx
	G2	50	41	0 ... 25	0 ... 362	6,8	8670700.8401.xxxxx	8670700.8404.xxxxx

xxxxx Please insert voltage and frequency codes

*1) Cv-value (US) ≈ kv value x 1,2

*2) For gases and liquid fluids up to 40 mm²/s (cSt)

86700

2/2-way valves – Solenoid actuated, with forced lifting

Standard solenoid systems

Voltage and Frequency Solenoid 8301/8304					
Code Voltage	Code Frequency	Voltage	Frequency	Power consumption	
				Inrush	Holding
024	00	24 V d.c.	-	22 W	22 W
024	49	24 V a.c. *3)	40 ... 60 Hz	25 VA	25 VA
110	49	110 V a.c. *3)	40 ... 60 Hz	25 VA	25 VA
120	49	120 V a.c. *3)	40 ... 60 Hz	25 VA	25 VA
230	49	230 V a.c. *3)	40 ... 60 Hz	25 VA	25 VA
Voltage and Frequency Solenoid 8401/8404					
024	00	24 V d.c.	-	40 W	40 W
024	49	24 V a.c. *3)	40 ... 60 Hz	45 VA	45 VA
110	49	110 V a.c. *3)	40 ... 60 Hz	45 VA	45 VA
120	49	120 V a.c. *3)	40 ... 60 Hz	45 VA	45 VA
230	49	230 V a.c. *3)	40 ... 60 Hz	45 VA	45 VA

*3) a.c. only with rectifier plug

Further versions on request!

Electrical details for all solenoid systems

Design	DIN VDE 0580
Voltage range	±10%
Duty cycle	100% ED
Protection class	EN 60529 IP65
Socket	Form A acc. to DIN EN 175301-803 (included)

According to DIN VDE 0580 at a solenoid temperature of +20°C.

At operating state temperature the input power of a coil decreases by up to ca. 30% due to physical reasons.

Additional solenoid systems for hazardous areas

ATEX category	ATEX protection class	IP protection class	Solenoid	Standard voltages
II 3G II 3D	Ex ec IIC T4 Gc Ex tc IIIC T130°C DC	IP65	8326 *4)	24 V DC
II 3G II 3D	Ex ec IIC T4 Gc Ex tc IIIC T130°C DC	IP65	8426 *4)	24 V DC
II 2G II 2D	Ex eb mb IIC T3 Gb Ex mb tb IIIB T135°C Db	IP66	6220	24 V d.c., 110 V a.c., 230 V a.c.
II 2G II 2D	Ex eb mb IIC T3 Gb Ex mb tb IIIB T140°C Db	IP66	6240	24 V d.c., 110 V a.c., 230 V a.c.

Attention!

The conditions imposed on the Ex approvals lead to reduction of the permissible standard temperature ranges in the cases of explosion protected solenoids.

*4) Only d.c., for a.c. solenoids with design inspection certificate acc. to category 2, e.g. 6220 or 6240

86720

2/2-way valves – Solenoid actuated, with forced lifting

Port size: G1/4 ... 2

Orifice: DN 8 ... 50

For steam and hot water

Valve operates without differential pressure

Valve with PTFE piston guide rings

*NPT-connection available:
change 86720 to 86730*



Technical data

Medium:

Neutral steam and liquids

Switching function:

Normally closed

Operation:

Solenoid actuated,
with forced lifting

Mounting position:

Solenoid vertical on top;
optional up to G1
solenoid underneath

Flow direction:

Determined

Port size:

G1/4, G3/8, G1/2, G3/4, G1,
G1 1/4, G1 1/2, G2

Operating pressure:

0 ... 16 bar (0 ... 232 psi)
(0 ... 25 bar (0 ... 362 psi))

Fluid temperature:

0 ... +200°C (+32 ... +392°F)

Ambient temperature:

0 ... +60°C (+32 ... +140°F)

Material:

Body: Brass (CW617N)

Seat seal: PTFE

Internal parts: Stainless steel,
PTFE / carbon

For contaminated fluids insertion
of a strainer is recommended.

Standard models

Symbol	Port size	Orifice (mm)	Flow kv value *1) (m³/h)	Operating pressure *2) (bar)	(psi)	Weight (kg)	Model Solenoid in V d.c.	Model Solenoid in V a.c.
	G1/4	8	2,2	0 ... 16	0 ... 232	2,4	8672000.8402.xxxxx	8672000.8406.xxxxx
	G3/8	10	3,4	0 ... 16	0 ... 232	2,4	8672100.8402.xxxxx	8672100.8406.xxxxx
	G1/2	12	4,4	0 ... 16	0 ... 232	2,5	8672200.8402.xxxxx	8672200.8406.xxxxx
	G3/4	20	6,5	0 ... 16	0 ... 232	2,7	8672300.8402.xxxxx	8672300.8406.xxxxx
	G1	25	10	0 ... 16	0 ... 232	3,1	8672400.8402.xxxxx	8672400.8406.xxxxx
	G1 1/4	32	22	0 ... 16	0 ... 232	5,6	8672500.8402.xxxxx	8672500.8406.xxxxx
	G1 1/2	40	23	0 ... 16	0 ... 232	5,4	8672600.8402.xxxxx	8672600.8406.xxxxx
	G2	50	37	0 ... 16	0 ... 232	6,8	8672700.8402.xxxxx	8672700.8406.xxxxx

xxxxx Please insert voltage and frequency codes

*1) Cv-value (US) ≈ kv value x 1,2

*2) For gases and liquid fluids up to 40 mm²/s (cSt)

Standard solenoid systems

Voltage and Frequency Solenoid 8402/8406					
Code Voltage	Code Frequency	Voltage	Frequency	Power consumption Inrush	Holding
024	00	24 V d.c.	-	29 W	29 W
024	49	24 V a.c. *3)	40 ... 60 Hz	33 VA	33 VA
110	49	110 V a.c. *3)	40 ... 60 Hz	33 VA	33 VA
120	49	120 V a.c. *3)	40 ... 60 Hz	33 VA	33 VA
230	49	230 V a.c. *3)	40 ... 60 Hz	33 VA	33 VA

*3) A.c. only with rectifier plug

Further versions on request!

Electrical details for all solenoid systems

Operation	DIN VDE 0580
Voltage range	±10%
Duty cycle	100% ED
Protection class	EN 60529 IP65
Socket	Form A acc. to DIN EN 175301-803 (included)

According to DIN VDE 0580 at a solenoid temperature of +20°C (+68°F).
At operating state temperature the input power of a coil decreases by up to
ca. 30% due to physical reasons.

85740

2/2-way valves –Solenoid actuated, with forced lifting

Port size: G1/4 ... 2

Orifice: DN 8 ... 50

For systems with low or fluctuating pressure

Suitable for vacuum

Damped operation

Valve operates without pressure differential

*NPT-connection available:
change 85740 to 85750*



Stainless Steel



Technical data

Medium:

Slightly aggressive gases and liquids

Switching function:

Normally closed

Operation:

Solenoid actuated, with forced lifting

Mounting position:

Optional, preferably solenoid vertical on top

Flow direction:

Determined

Port size:

G1/4, G3/8, G1/2, G3/4, G1, G1 1/4, G1 1/2, G2

Operating pressure:

0 ... 25 bar (0 ... 362 psi)

Fluid temperature:

–20 ... +90°C (–4 ... +194°F)

Ambient temperature:

–20 ... +50°C (–4 ... +122°F)

Material:

Body: Stainless steel (1.4408)

Seat seal: NBR

Internal parts: Stainless steel, PTFE / carbon

For contaminated fluids insertion of a strainer is recommended.

Standard models

Symbol	Port size	Orifice (mm)	Flow kv value *1) (m³/h)	Operating pressure *2) (bar)	(psi)	Weight (kg)	Model Solenoid in d.c.	Model Solenoid in a.c.
	G1/4	8	2,2	0 ... 25	0 ... 362 psi	2,4	8574000.9401.xxxxx	8574000.9404.xxxxx
	G3/8	10	3,4	0 ... 25	0 ... 362 psi	2,4	8574100.9401.xxxxx	8574100.9404.xxxxx
	G1/2	12	4,4	0 ... 25	0 ... 362 psi	2,5	8574200.9401.xxxxx	8574200.9404.xxxxx
	G3/4	20	7	0 ... 25	0 ... 362 psi	2,7	8574300.9401.xxxxx	8574300.9404.xxxxx
	G1	25	10,5	0 ... 25	0 ... 362 psi	3,1	8574400.9401.xxxxx	8574400.9404.xxxxx
	G1 1/4	32	25	0 ... 25	0 ... 362 psi	5,6	8574500.8401.xxxxx	8574500.8404.xxxxx
	G1 1/2	40	27	0 ... 25	0 ... 362 psi	5,4	8574600.8401.xxxxx	8574600.8404.xxxxx
	G2	50	43	0 ... 25	0 ... 362 psi	6,8	8574700.8401.xxxxx	8574700.8404.xxxxx

xxxxx Please insert voltage and frequency codes

*1) Cv-value (US) \approx kv value x 1,2

*2) For gases and liquid fluids up to 25 mm²/s (cSt)

Standard solenoid systems

Voltage and Frequency Solenoid 8301/8304					
Code Voltage	Code Frequency	Voltage	Frequency	Power consumption	
				Inrush	Holding
024	00	24 V d.c.	-	22 W	22 W
024	49	24 V a.c. *3)	40 ... 60 Hz	25 VA	25 VA
110	49	110 V a.c. *3)	40 ... 60 Hz	25 VA	25 VA
120	49	120 V a.c. *3)	40 ... 60 Hz	25 VA	25 VA
230	49	230 V a.c. *3)	40 ... 60 Hz	25 VA	25 VA
Voltage and Frequency Solenoid 8401/8404					
024	00	24 V d.c.	-	40 W	40 W
024	49	24 V a.c. *3)	40 ... 60 Hz	45 VA	45 VA
110	49	110 V a.c. *3)	40 ... 60 Hz	45 VA	45 VA
120	49	120 V a.c. *3)	40 ... 60 Hz	45 VA	45 VA
230	49	230 V a.c. *3)	40 ... 60 Hz	45 VA	45 VA

*3) a.c. with rectifier plug

Further versions on request!

Electrical details for all solenoid systems

Design	DIN VDE 0580
Voltage range	±10%
Duty cycle	100% ED
Protection class	EN 60529 IP65
Socket	Form A acc. to DIN EN 175301-803 (included)

According to DIN VDE 0580 at a solenoid temperature of +20°C.

At operating state temperature the input power of a coil decreases by up to ca. 30% due to physical reasons.

Additional solenoid systems for hazardous areas

ATEX category	ATEX protection class	IP protection class	Solenoid	Standard voltages
II 3G II 3D	Ex ec IIC T4 Gc Ex tc IIIC T130°C DC	IP65	8326 *4)	24 V d.c.
II 3G II 3D	Ex ec IIC T4 Gc Ex tc IIIC T130°C DC	IP65	8426 *4)	24 V d.c.
II 2G II 2D	Ex eb mb IIC T3 Gb Ex mb tb IIIB T135°C Db	IP66	6220	24 V DC, 110 V AC, 230 V AC
II 2G II 2D	Ex eb mb IIC T3 Gb Ex mb tb IIIB T140°C Db	IP66	6240	24 V d.c., 110 V a.c., 230 V a.c.


Attention!

The conditions imposed on the Ex approvals lead to reduction of the permissible standard temperature ranges in the cases of explosion protected solenoids.

*4) d.c. only, for a.c. solenoids with design inspection certificate acc. to category 2, e. g. 6240 or 6240



Engineering
GREAT Solutions



Indirect acting solenoid valves

PRODUCTS

50	Fast Find Guide	
51	2/2-way valves DN 8 ... 50, diaphragm valve, brass, female thread	82400
52	2/2-way valves DN 8 ... 25, diaphragm valve up to +150°C (+302°F)	82470
53	2/2-way valves DN 8 ... 50, diaphragm valve, stainless steel, female thread	82730
55	2/2-way valves DN 15 ... 50, diaphragm valve, flange connection	83030
57	2/2-way valves DN 8, high pressure, 320 bar (4641 psi)	83770
59	2/2-way valves DN 15, high pressure, 250 bar (3626 psi)	83790
61	2/2-way valves DN 12 ... 20, polymer version	84070
62	2/2-way valves DN 8 ... 50, piston valve, max. 40 bar (580 psi), female thread	85360
63	2/2-way valves DN 8 ... 25, piston valve up to +200°C (+392°F), female thread	85380
64	2/2-way valves DN 8 ... 25, piston valve, max. 40 bar (580 psi), flange connection	85660

Fast Find Guide

2/2-way valves

82400

DN 8 ... 50
Indirectly solenoid actuated,
diaphragm valve, brass



Page 51

82470

DN 8 ... 25
Indirectly solenoid actuated,
diaphragm valve up to +150°C
(+302°F)



Page 52

82730

DN 8 ... 50
Indirectly solenoid actuated,
diaphragm valve, stainless steel



Page 53

83030

DN 15 ... 50
Indirectly solenoid actuated,
diaphragm valve, flange



Page 55

83770

DN 8
Indirectly solenoid actuated,
high pressure, 320 bar
(4641 psi)



Page 57

83790

DN 15
Indirectly solenoid actuated,
high pressure, 250 bar (3626
psi)



Page 59

84070

DN 12 ... 20
Indirectly solenoid actuated,
polymer version



Seite 61

85360

DN 8 ... 50
Indirectly solenoid actuated,
piston valve, max. 40 bar
(580 psi)



Page 62

85380

DN 8 ... 25
Indirectly solenoid actuated,
piston valve up to +200°C
(+392°F)



Page 63

85660

DN 15 ... 50
Indirectly solenoid actuated,
max. 40 bar (580 psi), flange



Page 64

82400

2/2-way valves – Indirect solenoid actuated

Port size: G1/4 ... 2

Orifice: DN 8 ... 50

Functional compact design

High flow rate

Solenoid interchangeable without tools (Click-on®)

Damped operation

*NPT connection available:
change 82400 to 82410*



Click-on®



Technical data

Medium:

Neutral gases and liquids

Switching function:

Normally closed

Operation:

Indirect solenoid actuated

Mounting position:

Optional, preferably solenoid vertical on top

Flow direction:

Determined

Port size:

G1/4, G3/8, G1/2, G3/4, G1, G1 1/4, G1 1/2, G2

Operating pressure:

See table

Fluid temperature:

–10 ... +90°C (+14 ... +194°F)

Ambient temperature:

–10 ... +50°C (+14 ... +122°F)

Material:

Body: Brass (CW617N)

Seat seal: NBR

Internal parts: Stainless steel, PVDF

For contaminated fluids insertion of a strainer is recommended.

Standard models

Symbol	Port size	Orifice (mm)	Valve length (mm)	Flow kv value *1 (m³/h)	Operating pressure *2 (bar)	Operating pressure *2 (psi)	Weight (kg)	Model Solenoid in V d.c./a.c.
	G1/4	8	60	1,9	0,1 ... 16	1,4 ... 232	0,47	8240000.9101.xxxxx
	G3/8	10	60	3	0,1 ... 16	1,4 ... 232	0,45	8240100.9101.xxxxx
	G1/2	12	67	3,8	0,1 ... 16	1,4 ... 232	0,5	8240200.9101.xxxxx
	G3/4	20	80	6,1	0,1 ... 16	1,4 ... 232	0,65	8240300.9101.xxxxx
	G1	25	95	9,5	0,1 ... 16	1,4 ... 232	0,95	8240400.9101.xxxxx
	G1 1/4	32	132	23	0,1 ... 10 (16) *3	1,4 ... 145 (232) *3	2,73	8240500.9101.xxxxx
	G1 1/2	40	132	25	0,1 ... 10 (16) *3	1,4 ... 145 (232) *3	2,53	8240600.9101.xxxxx
	G2	50	160	41	0,1 ... 10 (16) *3	1,4 ... 145 (232) *3	3,85	8240700.9101.xxxxx

xxxxx Please insert voltage and frequency codes

*1) Cv-value (US) ≈ kv value x 1,2

*2) For gases and liquid fluids up to 25 mm²/s (cSt)

*3) With solenoid 9151

Standard solenoid systems

Voltage and Frequency Solenoid 9101 *4)					
Code Voltage	Code Frequency	Voltage	Frequency	Power consumption Inrush	Holding
024	00	24 V d.c.	-	8 W	8 W
024	50	24 V a.c.	50 Hz	15 VA	12 VA
110	50	110 V a.c.	50 Hz	15 VA	12 VA
120	60	120 V a.c.	60 Hz	15 VA	12 VA
230	50	230 V a.c.	50 Hz	15 VA	12 VA
Voltage and Frequency Solenoid 9151 *4)					
024	00	24 V d.c.	-	18 W	18 W
024	50	24 V a.c.	50 Hz	45 VA	35 VA
110	50	110 V a.c.	50 Hz	45 VA	35 VA
120	60	120 V a.c.	60 Hz	45 VA	35 VA
230	50	230 V a.c.	50 Hz	45 VA	35 VA



*4) C-US coil only

Further versions on request!

Electrical details for all solenoid systems

Design	DIN VDE 0580
Voltage range	±10%
Duty cycle	100% ED
Protection class	EN 60529 IP65
Socket	Form A acc. to DIN EN 175301-803 (included)

According to DIN VDE 0580 at a solenoid temperature of +20°C. At operating state temperature the input power of a coil decreases by up to ca. 30% due to physical reasons.

Additional solenoid systems for hazardous areas

ATEX category	ATEX protection class	IP protection class	Solenoid	Standard voltages
II 2G II 2D	Ex eb mb IIC T4 Gb Ex mb tb IIIB T125°C Db	IP66	6106	24 V d.c., 110 V a.c., 230 V a.c.
II 2G II 2D	Ex eb mb IIC T4 Gb Ex mb tb IIIB T125°C Db	IP66	6126 *5)	24 V d.c., 110 V a.c., 230 V a.c.
II 3G II 3D	Ex ec IIC T4 Gc Ex tc IIIC T130°C Dc	IP65	9116	24 V d.c., 110 V a.c., 230 V a.c.
II 3G II 3D	Ex ec IIC T4 Gc Ex tc IIIC T130°C Dc	IP65	9176	24 V d.c., 110 V a.c., 230 V a.c.

Attention!

The conditions imposed on the Ex approvals lead to reduction of the permissible standard temperature ranges in the cases of explosion protected solenoids.

*5) from G1 1/4 / 1 1/4 NPT (16 bar)

82470

2/2-way valves – Indirect solenoid actuated

Port size: G1/4 ... 1

Orifice: DN 8 ... 25

Functional compact design

High flow rate

Solenoid interchangeable without tools (Click-on®)

Damped operation

*NPT connection available:
change 82470 to 82680*



Click-on®



Technical data

Medium:

Hot water, steam

Switching function:

Normally closed

Operation:

Indirect solenoid actuated

Mounting position:

Optional, preferably solenoid vertical on top

Flow direction:

Determined

Port size:

G1/4, G3/8, G1/2, G3/4, G1

Operating pressure:

0.1 ... 10 bar (1.4 ... 145 psi)

Differential pressure:

0.1 bar required (1.4 psi)

Fluid temperature:

0 ... +150°C (+32 ... +302°F)

Ambient temperature:

–10 ... +60°C (+14 ... +140°F)

Material:

Body: Brass (CW617N)

Seat seal: HNBR

Internal parts: Stainless steel, brass

For contaminated fluids insertion of a strainer is recommended.

Standard models

Symbol	Port size	Orifice (mm)	Valve length (mm)	Flow kv value *1) (m³/h)	Operating pressure *2) (bar)	(psi)	Weight (kg)	Model Solenoid in V d.c./a.c.
	G1/4	8	60	1,7	0,1 ... 10	1,45 ... 145	0,47	8247000.9101.xxxxx
	G3/8	10	60	2,7	0,1 ... 10	1,45 ... 145	0,45	8247100.9101.xxxxx
	G1/2	12	67	3,4	0,1 ... 10	1,45 ... 145	0,5	8247200.9101.xxxxx
	G3/4	20	80	5,5	0,1 ... 10	1,45 ... 145	0,65	8247300.9101.xxxxx
	G1	25	95	8,5	0,1 ... 10	1,45 ... 145	0,95	8247400.9101.xxxxx

xxxxx Please insert voltage and frequency codes

*1) Cv-value (US) ≈ kv value x 1,2

*2) For gases and liquid fluids up to 25 mm³/s (cSt)

Standard solenoid systems

Voltage and Frequency Solenoid 9101 *3)

Code Voltage	Code Frequency	Voltage	Frequency	Power consumption Inrush	Holding
024	00	24 V d.c.	-	8 W	8 W
024	50	24 V a.c.	50 Hz	15 VA	12 VA
110	50	110 V a.c.	50 Hz	15 VA	12 VA
120	60	120 V a.c.	60 Hz	15 VA	12 VA
230	50	230 V a.c.	50 Hz	15 VA	12 VA

*3) US coil only

Electrical details for all solenoid systems

Design	DIN VDE 0580
Voltage range	±10%
Duty cycle	100% ED
Protection class	EN 60529 IP65
Socket	Form A acc. to DIN EN 175301-803 (included)

According to DIN VDE 0580 at a solenoid temperature of +20°C (+68°F). At operating state temperature the input power of a coil decreases by up to ca. 30% due to physical reasons.

82730

2/2-way valves – Indirect solenoid actuated

Port size: G1/4 ... 2

Orifice: DN 8 ... 50

Functional compact design

High flow rate

Solenoid interchangeable without tools (Click-on®)

Damped operation

*NPT connection available:
change 82730 to 82740*



Click-on®

Stainless Steel



Technical data

Medium:

Slightly aggressive gases
and liquid fluids

Switching function:

Normally closed

Operation:

Indirect solenoid actuated

Mounting position:

Optional, preferably solenoid
vertical on top

Flow direction:

Determined

Port size:

G1/4, G3/8, G1/2, G3/4, G1,
G1 1/4, G1 1/2, G2

Operating pressure:

See table

Differential pressure:

0.1 bar required (1.45 psi)

Fluid temperature:

–10 ... +90°C (+14 ... +194°F)

Ambient temperature:

–10 ... +50°C (+14 ... +122°F)

Material:

Body: Stainless steel (1.4408)

Seat seal: NBR

Internal parts: Stainless steel,
PVDF

For contaminated fluids insertion
of a strainer is recommended.

Standard models

Symbol	Port size	Orifice (mm)	Valve length (mm)	Flow kv value *1) (m³/h)	Operating pressure *2) (bar) (psi)		Weight (kg)	Model Solenoid in V d.c./a.c.
	G1/4	8	60	1,9	0,1 ... 16	1,45 ... 232	0,47	8273000.9101.xxxxx
	G3/8	10	60	3	0,1 ... 16	1,45 ... 232	0,45	8273100.9101.xxxxx
	G1/2	12	67	3,8	0,1 ... 16	1,45 ... 232	0,5	8273200.9101.xxxxx
	G3/4	20	80	6,1	0,1 ... 16	1,45 ... 232	0,65	8273300.9101.xxxxx
	G1	25	95	9,5	0,1 ... 16	1,45 ... 232	0,95	8273400.9101.xxxxx
	G1 1/4	32	132	23	0,1 ... 10	1,45 ... 145	2,6	8273500.9101.xxxxx
	G1 1/4	32	132	23	0,1 ... 16	1,45 ... 232	2,6	8273500.9151.xxxxx
	G1 1/2	40	132	25	0,1 ... 10	1,45 ... 145	2,84	8273600.9101.xxxxx
	G1 1/2	40	132	25	0,1 ... 16	1,45 ... 232	2,84	8273600.9151.xxxxx
	G2	50	160	41	0,1 ... 10	1,45 ... 145	3,85	8273700.9101.xxxxx
	G2	50	160	41	0,1 ... 16	1,45 ... 232	3,85	8273700.9151.xxxxx

xxxxx Please insert voltage and frequency codes

*1) Cv-value (US) ≈ kv value x 1,2

*2) For gases and liquid fluids up to 25 mm²/s (cSt)

82730

2/2-way valves – Indirect solenoid actuated

Standard solenoid systems

Voltage and Frequency Solenoid 9101 *3) *4)					
Code Voltage	Code Frequency	Voltage	Frequency	Power consumption	
				Inrush	Holding
024	00	24 V d.c.	-	8 W	8 W
024	50	24 V a.c.	50 Hz	15 VA	12 VA
110	50	110 V a.c.	50 Hz	15 VA	12 VA
120	60	120 V a.c.	60 Hz	15 VA	12 VA
230	50	230 V a.c.	50 Hz	15 VA	12 VA
Voltage and Frequency Solenoid 9151 *3) *4)					
024	00	24 V d.c.	-	18 W	18 W
024	50	24 V a.c.	50 Hz	45 VA	35 VA
110	50	110 V a.c.	50 Hz	45 VA	35 VA
120	60	120 V a.c.	60 Hz	45 VA	35 VA
230	50	230 V a.c.	50 Hz	45 VA	35 VA

*3) _{US} Coil only

*4) Attention! Standard core tube with copper shading coil.
Look for fluid resistant further options

Further versions on request!

Electrical details for all solenoid systems

Design	DIN VDE 0580
Voltage range	±10%
Duty cycle	100% ED
Protection class	EN 60529 IP65
Socket	Form A acc. to DIN EN 175301-803 (included)

According to DIN VDE 0580 at coil temperature of +20°C.
At operating state temperature the input power of a coil decreases by up to ca. 30% due to physical reasons.

Additional solenoid systems for hazardous areas

ATEX category	ATEX protection class	IP protection class	So- lenoid	Standard voltages
II 2G II 2D	Ex eb mb IIC T4 Gb Ex mb tb IIIB T125°C Db	IP66	6106	24 V d.c., 110 V a.c., 230 V a.c.
II 2G II 2D	Ex eb mb IIC T4 Gb Ex mb tb IIIB T125°C Db	IP66	6126 *5)	24 V d.c., 110 V a.c., 230 V a.c.

Attention!
The conditions imposed on the Ex approvals lead to reduction of the permissible standard temperature ranges in the cases of explosion protected solenoids.
*5) from G1 1/4 / 1 1/4 NPT (16 bar)

83030

2/2-way valves – Indirect solenoid actuated

Port size: PN 16

Orifice: DN 15 ... 50

Functional compact design

High flow rate

Solenoid interchangeable without tools (*Click-on*®)

Damped operation

Click-on®



Technical data

Medium:

Neutral gases and liquids

Switching function:

Normally closed

Operation:

Indirect solenoid actuated

Mounting position:

Optional, preferably solenoid vertical on top

Flow direction:

Determined

Port size:

Flange PN 16,
DN 15, DN 20, DN 25,
DN 32, DN 40, DN 50

Operating pressure:

0,1 ... 10/16 bar
(1,45 ... 145/232 psi)

Fluid temperature:

–10 ... +90°C (+14 ... +194°F)

Ambient temperature:

–10 ... +50°C (+14 ... +194°F)

Material:

Body: Cast steel, brass

Seat seal: NBR

Internal parts: Stainless steel,
PVDF resp. brass from DN 32

For contaminated fluids insertion
of a strainer is recommended.

Standard models

Symbol	Orifice (mm)	Flow kv value *1) (m³/h)	Operating pressure *2) (bar)	(psi)	Weight (kg)	Model Solenoid in V d.c./a.c.
	15	3,8	0,1 ... 16	1,45 ... 232	2,6	8303200.9101.xxxxx
	20	6,1	0,1 ... 16	1,45 ... 232	2,8	8303300.9101.xxxxx
	25	9,5	0,1 ... 16	1,45 ... 232	3,2	8303400.9101.xxxxx
	32	23	0,1 ... 10	1,45 ... 145	5,8	8303500.9101.xxxxx
	32	23	0,1 ... 16	1,45 ... 232	5,9	8303500.9151.xxxxx
	40	25	0,1 ... 10	1,45 ... 145	6,1	8303600.9101.xxxxx
	40	25	0,1 ... 16	1,45 ... 232	6,2	8303600.9151.xxxxx
	50	41	0,1 ... 10	1,45 ... 145	8,4	8303700.9101.xxxxx
	50	41	0,1 ... 16	1,45 ... 232	8,5	8303700.9151.xxxxx

xxxxx Please insert voltage and frequency codes

*1) Cv-value (US) \approx kv value \times 1,2

*2) For gases and liquid fluids up to 25 mm²/s (cSt)

83030

2/2-way valves – Indirect solenoid actuated

Acc. to ATEX 2014/34/EU!

Standard solenoid systems

Voltage and Frequency Solenoid 9841					
Code Voltage	Code Frequency	Voltage	Frequency	Power consumption Inrush	Power consumption Holding
024	00	24 V d.c.	-	10,1 W	10,1 W
230	59	230 V a.c.	50 ... 60 Hz	9,2 VA	9,2 VA
Voltage and Frequency Solenoid 6126					
024	00	24 V d.c.	-	14 W	14 W
230	49	230 V a.c.	40 ... 60 Hz	16 VA	16 VA
Voltage and Frequency Solenoid 428x					
024	00	24 V d.c.	-	11,4 W	11,4 W
230	49	230 V a.c.	40 ... 60 Hz	15,2 VA	15,2 VA
Voltage and Frequency Solenoid 468x					
024	00	24 V d.c.	-	11,4 W	11,4 W
230	49	230 V a.c.	40 ... 60 Hz	15,2 VA	15,2 VA
Voltage and Frequency Solenoid 382x					
024	00	24 V d.c.	-	14 W	14 W
230	49	230 V a.c.	40 ... 60 Hz	16 VA	16 VA

Electrical details for all solenoid systems

Voltage range	±10%
Duty cycle	100% ED
Protection class	EN 60529 IP65

According to DIN VDE 0580 at a solenoid temperature of +20°C (+68°F). At operating state temperature the input power of a coil decreases by up to ca. 30% due to physical reasons.

Additional solenoid systems for hazardous areas

Solenoid	ATEX category	Ex-protection class
428x	II 2G	Ex eb mb IIC T4/T5 Gb
	II 2D	Ex tb IIIC T 130 °C D IP66
468x	II 2G	Ex d mb IIC T4/T5 Gb
	II 2D	Ex tb IIIC T130°C/T95°C Db
984x	II 2G	Ex mb IIC T4 Gb
	II 2D	Ex mb tb IIIC T130°C Db
6126	II 2G	Ex eb mb IIC T4 Gb
	II 2D	Ex mb tb IIIB T125°C Db IP66

Solenoid systems with FM approval (USA)

Solenoid	FM approval	
382x	1,3,4,4X,6,6P,7 und 9	FM approved (File Nr. 2Z2A6.AE)

Admissible Ex areas (USA)

Solenoid 382x	Class	Divison	Groups
Gases + fumes	I	1 and 2	A ... D
Dusts	II	1 and 2	E ... G
Fibres + fluffs	III	1 and 2	–

83770

2/2-way valves – Indirect solenoid actuated

Port size: G1/4 ... 1/2

Orifice: DN 8

High pressure solenoid valves

Acc. to PED 2014/68 EU

Solenoid interchangeable without tools (Click-on®)

Further customized solutions on request for example:

- with integrated check valve
- Block solutions
- Stainless steel housing

Click-on®



8590178.6126



8590178.428x



8590185.9841



Technical data

Medium:

For compressed natural gas (CNG)

Switching function:

Normally closed

Operation:

Indirect solenoid actuated

Mounting position:

Optional, preferably solenoid vertical on top

Flow direction:

Determined

Port size:

G1/4, G3/8, G1/2

Operating pressure:

10 ... 320 bar (145 ... 4641 psi)

Leakage rate:

Internal Leakage acc. to DIN EN 12266-1 Leakage "C"

External Leakage acc. to DIN EN 12266-1 Leakage "A"

Fluid temperature:

Solenoid 984x: -20 ... +60°C

(-4 ... +140°F)

Solenoid 612x: -20 ... +60°C

(-4 ... +140°F)

Solenoid 428x: -40 ... +50°C

(-40 ... +122°F)

Solenoid 468x: -40 ... +50°C

(-40 ... +122°F)

Solenoid 382x: -20 ... +60°C

(-4 ... +140°F)

Ambient temperature:

Solenoid 984x: -20 ... +50°C

(-4 ... +122°F)

Solenoid 612x: -20 ... +40°C

(-4 ... +104°F)

Solenoid 428x: -40 ... +50°C

(-40 ... +122°F) T4; T5 siehe S.2

Solenoid 468x: -40 ... +50°C

(-40 ... +122°F) T4; T5 siehe S.2

Solenoid 382x: -20 ... +60°C

(-4 ... +140°F)

Material:

Body: Brass

Seat seal: Polymer

Internal parts: Brass, stainless steel, polymer

Installation of a 40 µm filter in front of the valve is required!

Standard models

Port size	Orifice (mm)	Flow kv value *1) (m³/h)	Operating pressure *2) *3) (bar)	(psi)	Weight (kg)	Model Solenoid in V d.c./a.c.
G1/4	8	1,2	10 ... 320	145 ... 4641	2,2	8590371.984x.xxxxx
G1/4	8	1,2	10 ... 320	145 ... 4641	2,3	8590371.612x.xxxxx
G1/4	8	1,2	10 ... 320	145 ... 4641	-	8590371.428x.xxxxx
G1/4	8	1,2	10 ... 320	145 ... 4641	-	8590371.468x.xxxxx
G1/4	8	1,2	10 ... 320	145 ... 4641	-	8590371.382x.xxxxx
G3/8	8	1,2	10 ... 320	145 ... 4641	2,2	8590185.984x.xxxxx
G3/8	8	1,2	10 ... 320	145 ... 4641	2,3	8590178.6126.xxxxx
G3/8	8	1,2	10 ... 320	145 ... 4641	2,3	8590178.428x.xxxxx
G3/8	8	1,2	10 ... 320	145 ... 4641	2,5	8590178.468x.xxxxx
G3/8	8	1,2	10 ... 320	145 ... 4641	2,2	8590178.382x.xxxxx
G1/2	8	1,2	10 ... 320	145 ... 4641	2,2	8590337.984x.xxxxx
G1/2	8	1,2	10 ... 320	145 ... 4641	2,3	8590337.612x.xxxxx
G1/2	8	1,2	10 ... 320	145 ... 4641	2,5	8590337.428x.xxxxx
G1/2	8	1,2	10 ... 320	145 ... 4641	-	8590337.468x.xxxxx
G1/2	8	1,2	10 ... 320	145 ... 4641	-	8590337.382x.xxxxx

xxxxx Please insert voltage and frequency codes

*1) Cv-value (US) ≈ kv value x 1,2

*2) Static test pressure PT = 480 bar (6961 psi)

*3) Max. Operating pressure = 320 bar (4641 psi)

83770

2/2-way valves – Indirect solenoid actuated

Acc. to ATEX 2014/34/EU!

Standard solenoid systems

Voltage and Frequency Solenoid 9841					
Code Voltage	Code Frequency	Voltage	Frequency	Power consumption Inrush	Power consumption Holding
024	00	24 V d.c.	-	10,1 W	10,1 W
230	59	230 V a.c.	50 ... 60 Hz	9,2 VA	9,2 VA
Voltage and Frequency Solenoid 6126					
024	00	24 V d.c.	-	14 W	14 W
230	49	230 V a.c.	40 ... 60 Hz	16 VA	16 VA
Voltage and Frequency Solenoid 428x					
024	00	24 V d.c.	-	11,4 W	11,4 W
230	49	230 V a.c.	40 ... 60 Hz	15,2 VA	15,2 VA
Voltage and Frequency Solenoid 468x					
024	00	24 V d.c.	-	11,4 W	11,4 W
230	49	230 V a.c.	40 ... 60 Hz	15,2 VA	15,2 VA
Voltage and Frequency Solenoid 382x					
024	00	24 V d.c.	-	14 W	14 W
230	49	230 V a.c.	40 ... 60 Hz	16 VA	16 VA

Electrical details for all solenoid systems

Voltage range	±10%
Duty cycle	100% ED
Protection class	EN 60529 IP65

According to DIN VDE 0580 at a solenoid temperature of +20°C (+68°F). At operating state temperature the input power of a coil decreases by up to ca. 30% due to physical reasons.

Additional solenoid systems for hazardous areas

Solenoid	ATEX category	Ex-protection class
428x	II 2G	Ex eb mb IIC T4/T5 Gb
	II 2D	Ex tb IIIC T 130 °C D IP66
468x	II 2G	Ex d mb IIC T4/T5 Gb
	II 2D	Ex tb IIIC T130°C/T95°C Db
984x	II 2G	Ex mb IIC T4 Gb
	II 2D	Ex mb tb IIIC T130°C Db
6126	II 2G	Ex eb mb IIC T4 Gb
	II 2D	Ex mb tb IIIB T125°C Db IP66

Solenoid systems with FM approval (USA)

Solenoid	FM approval	
382x	1,3,4,4X,6,6P,7 und 9	FM approved (File Nr. 2Z2A6.AE)

Admissible Ex areas (USA)

Solenoid 382x	Class	Divison	Groups
Gases + fumes	I	1 and 2	A ... D
Dusts	II	1 and 2	E ... G
Fibres + fluffs	III	1 and 2	–

83790

2/2-way valves – Indirect solenoid actuated

Port size: G3/4 ...1

Orifice: DN 15

High pressure solenoid valves

Acc. to PED 2014/68 EU

Further customized solutions available upon request:

- 350 bar version
- Pressure sensor connections
- with integrated check valve
- Pressure sensor connections
- Stainless steel version



8590649.9841



8590556.9841



8590365.9841



Technical data

Medium:

For compressed natural gas (CNG)

Switching function:

Normally closed

Operation:

Indirect solenoid actuated

Mounting position:

Optional, preferably solenoid vertical on top

Flow direction:

Determined

Port size:

G1/4, G3/4, G1

Operating pressure:

10 ... 250 bar (14,5 ... 3620 psi)

Leakage:

Internal Leakage acc. to DIN EN 12266-1 Leakage "E"
External Leakage acc. to DIN EN 12266-1 Leakage "A"

Fluid temperature:

Solenoid 984x: -20° ... +60°C (-4° ... +140°F)

Solenoid 6126: -20° ... +60°C (-4° ... +140°F)

Solenoid 428x: -40° ... +50°C (-40° ... +122°F)

Solenoid 468x: -40° ... +50°C (-40° ... +122°F)

Solenoid 382x: -20° ... +60°C (-4° ... +140°F)

Ambient temperature:

Solenoid 984x: -20° ... +50°C (-4° ... +122°F)

Solenoid 6126: -20° ... +40°C (-4° ... +104°F)

Solenoid 428x: -40° ... +50°C (-40° ... +122°F) T4; T5 see page 2

Solenoid 468x: -40° ... +50°C (-40° ... +122°F) T4; T5 see page 2

Solenoid 382x: -20° ... +60°C (-4° ... +140°F)

Material:

Body: Brass

Seat seal: Polymer

Internal parts: Brass, Stainless steel, Polymer

Installation of a 40 µm filter in front of the valve is required!

Standard models

Execution	Port size	Orifice (mm)	Flow kv value *1) (m³/h)	Operating pressure *2) (bar)	Weight (kg)	Model Solenoid in V d.c./a.c.
Single valve	G3/4	13	3,0	10 ... 250	4,8	8590649.984x.xxxxx
Single valve	G3/4	15	4,5	10 ... 250	5,0 5,1 4,7	8590649.382x.xxxxx 8590649.428x.xxxxx 8590649.468x.xxxxx 8590649.6126.xxxxx
2-station manifold with integrated non return pressure valves for the 2-bank control	1 x G1 Inlet 2 x G3/4 Outlet 2 x G1/4 for Pressure transmitter *3)	13		10 ... 250	145 ... 3626	12,5 8590556.984x.xxxxx
2-station manifold with integrated non return pressure valves for the 2-bank control	1 x G1 Inlet 2 x G3/4 Outlet 2 x G1/4 for Pressure transmitter *3)	15		10 ... 250	145 ... 3626	8590556.382x.xxxxx 8590556.428x.xxxxx 8590556.468x.xxxxx 8590556.6126.xxxxx
3-station manifold with integrated no return pressure valves for the 3-bank control	1 x G1 Inlet 3 x G3/4 Outlet 3 x G1/4 for Pressure transmitter *3)	13		10 ... 250	145 ... 3626	17,3 8590365.984x.xxxxx
2-station manifold with integrated non return pressure valves for the 2-bank control	1 x G1 Inlet 2 x G3/4 Outlet 2 x G1/4 for Pressure transmitter *3)	15		10 ... 250	145 ... 3626	8590365.382x.xxxxx 8590365.428x.xxxxx 8590365.468x.xxxxx 8590365.6126.xxxxx

xxxxx Please insert voltage and frequency codes

*1) Cv-value (US) ≈ kv value x 1,2

*2) Static test pressure PT = 375 bar

*3) Not included

More multi station variants (with or without integrated non return pressure valves, integrated filter, ...) on request.

Orifices and solenoid types may be combined in one block if necessary.

According to PED 2014/68/EU and ATEX 2014/34/EU!

83790

2/2-way valves – Indirect solenoid actuated

Actuation solenoids – Technical data and connection type

Solenoid	Code Voltage	Code Frequency	Voltage	Frequency	Power consumption		Connection
					Inrush	Holding	
3826	024	00	24 V d.c.	-	13,6 VA	13,6 VA	1/2" Conduit 3 connection strands, length 460 mm cable gland 1/2-14 NPT
3827	230	49	230 V a.c.	40 ... 60 Hz	15,4 VA	15,4 VA	1/2" Conduit 3 connection strands, length 460 mm cable gland 1/2-14 NPT
4280	024	00	24 V d.c.	-	11,4 W	11,4 W	cable gland M20 x 1,5 Note: A cable gland made from plastic must be chosen during order.
4281	230	49	230 V a.c.	40 ... 60 Hz	15,2 VA	15,2 VA	cable gland M20 x 1,5 Note: A cable gland made from plastic must be chosen during order.
4680	024	00	24 V d.c.	-	11,4 W	11,4 W	connection housing for cables 7,5-11,9 mm cable gland 1/2-14 NPT
4681	230	49	230 V a.c.	40 ... 60 Hz	15,2 VA	15,2 VA	connection housing for cables 7,5-11,9 mm cable gland 1/2-14 NPT
4682	024	00	24 V d.c.	-	11,4 W	11,4 W	connection housing for cables 10-14 mm cable gland M20 x 1,5
4683	230	49	230 V a.c.	40 ... 60 Hz	15,2 VA	15,2 VA	connection housing for cables 10-14 mm cable gland M20 x 1,5
6126	024	00	24 V d.c.	-	14 W	14 W	connection housing for cables 7-9 mm cable gland M16 x 1,5
6126	230	49	230 V a.c.	40 ... 60 Hz	16 VA	16 VA	connection housing for cables 7-9 mm cable gland M16 x 1,5
9841	024	00	24 V d.c.	-	10,1 W	10,1 W	with 3 m connection cable
9844	024	00	24 V d.c.	-	10,1 W	10,1 W	with 5 m connection cable
9845	024	00	24 V d.c.	-	10,1 W	10,1 W	with 10 m connection cable
9845	230	59	230 V a.c.	50 ... 60 Hz	9,2 VA	9,2 VA	with 10 m connection cable

Electrical details for all solenoid systems

Voltage range	±10%
Duty cycle	100% ED
Protection class	EN 60529 IP65 (exception 428x: IP66)

According to DIN VDE 0580 at a solenoid temperature of +20°C.
At operating state temperature the input power of a coil decreases by up to ca. 30% due to physical reasons..

ATEX-Identification for solenoid systems

Solenoid	ATEX category	Ex-protection class
428x	II 2G II 2D	Ex eb mb IIC T4/T5 Gb Ex tb IIIC T 130 °C D IP66
468x	II 2G II 2D	Ex d mb IIC T4/T5 Gb Ex tb IIIC T130°C/T95°C Db
984x	II 2G II 2D	Ex mb IIC T4 Gb Ex mb tb IIIC T130°C Db
6126	II 2G II 2D	Ex eb mb IIC T4 Gb Ex mb tb IIIB T125°C Db IP66

Solenoid systems with FM approval (USA)

Solenoid	FM approval
382x	1,3,4,4X,6,6P,7 und 9 FM approved (File Nr. 2Z2A6.AE)

Admissible Ex areas (USA)

Solenoid 382x	Class	Divison	Groups
Gases + fumes	I	1 and 2	A ... D
Dusts	II	1 and 2	E ... G
Fibres + fluffs	III	1 and 2	–

84070

2/2-way valves – Indirect solenoid actuated

Port size: G1/2 ... 3/4

Orifice: DN 12 ... 20

Functional compact design

High flow rate

International approvals

Solenoid interchangeable without tools (Click-on®)

Damped operation



Click-on®



Technical data

Medium:

Neutral gases and liquids

Switching function:

Normally closed

Operation:

Indirect solenoid actuated

Mounting position:

Optional, preferably solenoid vertical on top

Flow direction:

Determined

Port size:

G1/2, G3/4

Operating pressure:

0.3 ... 10.5 bar (4.35 ... 152 psi)

Fluid temperature:

+5 ... +50°C (+41 ... +122°F)

Ambient temperature:

0 ... +50°C (+32 ... +122°F)

Material:


Body: Polymer (PA12-GF50)

Seat seal: EPDM

Internal parts: Stainless steel, PVDF

For contaminated fluids insertion of a strainer is recommended.

Standard models

Symbol	Port size	Orifice (mm)	Flow kv value *1) (m³/h)	Operating pressure *2) (bar) (psi)		Weight (kg)	Model Solenoid in V d.c./a.c.
	G1/2	12	3	0,3 ... 10,5	4,35 ... 152	0,28	8407214.9101.xxxxx
	G3/4	20	5	0,3 ... 10,5	4,35 ... 152	0,3	8407314.9101.xxxxx

xxxxx Please insert voltage and frequency codes

*1) Cv-value (US) ≈ kv value x 1,2

*2) For gases and liquid fluids up to 25 mm³/s (cSt)

Standard solenoid systems

Voltage and Frequency Solenoid 9101 *3)					
Code Voltage	Code Frequency	Voltage	Frequency	Power consumption Inrush	Power consumption Holding
024	00	24 V d.c.	-	8 W	8 W
024	50	24 V a.c.	50 Hz	15 VA	12 VA
110	50	110 V a.c.	50 Hz	15 VA	12 VA
120	60	120 V a.c.	60 Hz	15 VA	12 VA
230	50	230 V a.c.	50 Hz	15 VA	12 VA

*3) US coil only

Further versions on request!

Specific NSF listed voltages for this valve can be found on: www.nsf.org.

Electrical details for all solenoid systems

Design	DIN VDE 0580
Voltage range	±10%
Duty cycle	100% ED
Protection class	EN 60529 IP65
Socket	Form A acc. to DIN EN 175301-803 (included)

According to DIN VDE 0580 at a solenoid temperature of +20°C (+68°F). At operating state temperature the input power of a coil decreases by up to ca. 30% due to physical reasons.

85360

2/2-way valves – Indirect solenoid actuated

Port size: G1/4 ... 2**Orifice: DN 8 ... 50****High flow rate****Long lifetime****Compact build piston valve****Solenoid interchangeable without tools (Click-on®)****Piston guided in PTFE rings***NPT connection available:
change 85360 to 85370***Click-on®****Technical data****Medium:**

Neutral gases and liquids

Switching function:

Normally closed

Operation:

Indirect solenoid actuated

Mounting position:Optional, preferably solenoid
vertical on top**Flow direction:**

Determined

Port size:G1/4, G3/8, G1/2, G3/4, G1,
G1 1/4, G1 1/2, G2**Operating pressure:**

0,5 ... 40 bar (7,25 ... 580 psi)

Fluid temperature:

-20 ... +90°C (-4 ... +194°F)

Ambient temperature:

-20 ... +50°C (-4 ... +122°F)

Material:

Body: Brass (CW617N)

Seat seal: NBR

Internal parts: Stainless steel,
brass, PTFE / carbonFor contaminated fluids insertion
of a strainer is recommended.**Standard models**

Symbol	Port size	Orifice (mm)	Flow kv value *1) (m³/h)	Operating pressure *2) (bar)	(psi)	Weight (kg)	Model Solenoid in V d.c./a.c.
	G1/4	8	2,2	0,5 ... 40	7,25 ... 580	0,83	8536000.9151.xxxxx
	G3/8	10	3,4	0,5 ... 40	7,25 ... 580	0,82	8536100.9151.xxxxx
	G1/2	12	4,4	0,5 ... 40	7,25 ... 580	0,85	8536200.9151.xxxxx
	G3/4	20	7	0,5 ... 40	7,25 ... 580	1,25	8536300.9151.xxxxx
	G1	25	10,5	0,5 ... 40	7,25 ... 580	1,7	8536400.9151.xxxxx
	G1 1/4	32	25	0,5 ... 40	7,25 ... 580	4,1	8536500.9151.xxxxx
	G1 1/2	40	27	0,5 ... 40	7,25 ... 580	3,85	8536600.9151.xxxxx
	G2	50	43	0,5 ... 40	7,25 ... 580	5,6	8536700.9151.xxxxx

xxxxx Please insert voltage and frequency codes

*1) Cv-value (US) ≈ kv value x 1,2

*2) For gases and liquid fluids up to 25 mm³/s (cSt)

Standard solenoid systems

Voltage and Frequency Solenoid 9151 *1)					
Code Voltage	Code Frequency	Voltage	Frequency	Inrush	Holding
024	00	24 V d.c.	-	18 W	18 W
024	50	24 V a.c.	50 Hz	45 VA	35 VA
110	50	110 V a.c.	50 Hz	45 VA	35 VA
120	60	120 V a.c.	60 Hz	45 VA	35 VA
230	50	230 V a.c.	50 Hz	45 VA	35 VA

*1) US coil only

Further versions on request!

Electrical details for all solenoid systems

Design	DIN VDE 0580
Voltage range	±10%
Duty cycle	100% ED
Protection class	EN 60529 IP65
Socket	Form A acc. to DIN EN 175301-803 (included)

According to DIN VDE 0580 at a solenoid temperature of +20°C.

At operating state temperature the input power of a coil decreases by up to
ca. 30% due to physical reasons.**Additional solenoid systems for hazardous areas**

ATEX category	ATEX protection class	IP protection class	So- lenoid	Standard voltages
II 3G II 3D	Ex ec IIC T4 Gc Ex tc IIIC T130°C DC	IP65	9176	24 V d.c., 110 V a.c., 230 V a.c.
II 2G II 2D	Ex d mb IIC T4/T5 Gb Ex tb IIIC T130°C/T95°C Db up to DN 25: Operating pressure 0,5 ... 16 bar from DN 32: Operating pressure 0,5 ... 10 bar	IP65	468x	24 V d.c., 110 V a.c., 230 V a.c.
II 2G II 2D	Ex eb mb IIC T4 Gb Ex mb tb IIIB T125°C Db	IP66	6126	24 V d.c., 110 V a.c., 230 V a.c.

Attention!The conditions imposed on the Ex approvals lead to reduction of the permissible
standard temperature ranges in the cases of explosion protected solenoids.

85380

2/2-way valves – Indirect solenoid actuated

Port size: G1/4 ... 1

Orifice: DN 8 ... 25

High flow rate

Long lifetime

Compact build piston valve

Solenoid interchangeable without tools (Click-on®)

Piston guided in PTFE rings

*NPT connection available:
change 85380 to 85390*



Click-on®



Technical data

Medium:

Neutral steam and liquids

Switching function:

Normally closed

Operation:

Indirect solenoid actuated

Mounting position:

Optional, solenoid preferably vertical on top

Flow direction:

Determined

Port size:

G1/4, G3/8, G1/2, G3/4, G1

Operating pressure:

1 ... 25 bar (14,5 ... 363 psi)

Fluid temperature:

0 ... +200°C (+32 ... +392°F) *1)

Ambient temperature:

0 ... +50°C (+32 ... +122°F) *1)
with solenoid mounted vertical underneath max. +60°C (+140°F) *2)

Material:

Body: Brass (CW617N)

Seat seal: PTFE

Internal parts: Stainless steel, FPM, PTFE

For contaminated fluids insertion of a strainer is recommended.

Standard models

Symbol	Port size	Orifice (mm)	Flow kv value *3) (m³/h)	Operating pressure *4) (bar)	Operating pressure *4) (psi)	Weight (kg)	Model Solenoid in V d.c./a.c.
	G1/4	8	2,2	1 ... 25	14,5 ... 363	0,83	8538000.9152.xxxxx
	G3/8	10	3,4	1 ... 25	14,5 ... 363	0,82	8538100.9152.xxxxx
	G1/2	12	4,4	1 ... 25	14,5 ... 363	0,85	8538200.9152.xxxxx
	G3/4	20	7	1 ... 25	14,5 ... 363	1,25	8538300.9152.xxxxx
	G1	25	10,5	1 ... 25	14,5 ... 363	1,7	8538400.9152.xxxxx

xxxxx Please insert voltage and frequency codes

*1) Temperature < 0°C (+14°F) on request

*2) Temperature max. +55°C (+131°F) within the scope of _{US}

*3) Cv-value (US) ≈ kv value x 1,2

*4) For gases and liquid fluids up to 40 mm²/s (cSt)

Leakage rate E acc. to DIN EN 12266-1

Standard solenoid systems

Voltage and Frequency Solenoid 9152 *5)					
Code Voltage	Code Frequency	Voltage	Frequency	Power consumption	
				Inrush	Holding
024	00	24 V d.c.	-	10 W	10 W
024	50	24 V a.c.	50 Hz	45 VA	35 VA
110	50	110 V a.c.	50 Hz	45 VA	35 VA
120	60	120 V a.c.	60 Hz	45 VA	35 VA
230	50	230 V a.c.	50 Hz	45 VA	35 VA

*5) _{US} coil only up to +55°C ambient temperature
Further versions on request!

Electrical details for all solenoid systems

Design	DIN VDE 0580
Voltage range	±10%
Duty cycle	100% ED
Protection class	EN 60529 IP65
Socket	Form A acc. to DIN EN 175301-803 (included)

According to DIN VDE 0580 at a solenoid temperature of +20°C (+68°F).
At operating state temperature the input power of a coil decreases by up to ca. 30% due to physical reasons.

85660

2/2-way valves – Indirect solenoid actuated

Port size: Flange PN 40

Orifice: DN 15 ... 50

High flow rate

Long lifetime

Compact build piston valve

Solenoid interchangeable without tools (Click-on®)

Piston guided in PTFE rings



Click-on®



Technical data

Medium:

Neutral gases and liquids

Switching function:

Normally closed

Operation:

Indirect solenoid actuated

Mounting position:

Optional, preferably solenoid vertical on top

Flow direction:

Determined

Port size:

Flange PN 40,
DN 15, DN 20, DN 25,
DN 32, DN 40, DN 50

Operating pressure:

0.5 ... 40 bar (7.25 ... 580 psi)

Fluid temperature:

–20 ... +90°C (–4 ... +194°F)

Ambient temperature:

–20 ... +50°C (–4 ... +122°F)

Material:

Body: Cast steel (1.0619), brass (CW617N)

Seat seal: NBR

Internal parts: Stainless steel, brass, PTFE

For contaminated fluids insertion of a strainer is recommended.

Standard models

Symbol	Orifice (mm)	Flow kv value *1) (m³/h)	Operating pressure *2) (bar)	(psi)	Weight (kg)	Model Solenoid in d.c./a.c.
	15	4,4	0,5 ... 40	7,25 ... 580	3,2	8566200.9151.xxxxx
	20	7	0,5 ... 40	7,25 ... 580	3,6	8566300.9151.xxxxx
	25	10,5	0,5 ... 40	7,25 ... 580	4,2	8566400.9151.xxxxx
	32	25	0,5 ... 40	7,25 ... 580	7,2	8566500.9151.xxxxx
	40	27	0,5 ... 40	7,25 ... 580	7,6	8566600.9151.xxxxx
	50	43	0,5 ... 40	7,25 ... 580	8,8	8566700.9151.xxxxx

xxxxx Please insert voltage and frequency codes

*1) Cv-value (US) ≈ kv value x 1,2

*2) For gases and liquid fluids up to 60 mm²/s (cSt)

Standard solenoid systems

Voltage and Frequency Solenoid 9151 *1)

Code Voltage	Code Frequency	Voltage	Frequency	Power consumption	
				Inrush	Holding
024	00	24 V d.c.	-	17 W	17 W
024	50	24 V a.c.	50 Hz	45 VA	35 VA
110	50	110 V a.c.	50 Hz	45 VA	35 VA
120	60	120 V a.c.	60 Hz	45 VA	35 VA
230	50	230 V a.c.	50 Hz	45 VA	35 VA

*1)  _{US} coil only

Further versions on request!

Electrical details for all solenoid systems

Design	DIN VDE 0580
Voltage range	±10%
Duty cycle	100% ED
Protection class	EN 60529 IP65
Socket	Form A acc. to DIN EN 175301-803 (included)

According to DIN VDE 0580 at a solenoid temperature of +20°C. At operating state temperature the input power of a coil decreases by up to ca. 30% due to physical reasons.

Additional solenoid systems for hazardous areas

ATEX category	ATEX protection class	IP protection class	Solenoid	Standard voltages
II 3G II 3D	Ex ec IIC T4 Gc Ex tc IIIC T130°C DC	IP65	9176	24 V d.c., 110 V a.c., 230 V a.c.
II 2G II 2D	Ex d mb IIC T4/T5 Gb Ex tb IIIC T130°C/T95°C Db up to DN 25: Operating pressure 0,5 ... 16 bar (7,25 ... 232 psi) from DN 32: Operating pressure 0,5 ... 10 bar (7,25 ... 145 psi)	IP66	468x	24 V d.c., 110 V a.c., 230 V a.c.
II 2G II 2D	Ex eb mb IIC T4 Gb Ex mb tb IIIB T125°C Db	IP66	6126	24 V d.c., 110 V a.c., 230 V a.c.

Attention!


The conditions imposed on the Ex approvals lead to reduction of the permissible standard temperature ranges in the cases of explosion protected solenoids.



Connect

We work as
one business

Engineering
GREAT Solutions



Pressure operated valves by external fluid

PRODUCTS

68	Fast Find Guide	
69	2/2-way valves DN 8 ... 50, brass, insensitive to dirt	82160
70	2/2-way valves DN 8 ... 50, brass, insensitive to dirt	82170
71	2/2-way valves DN 15 ... 50, angle seat valve, actuator ø 70 mm, brass	82180
71	2/2-way valves DN 15 ... 50, angle seat valve, actuator ø 125 mm, brass	82280
72	2/2-way valves DN 15 ... 100, seat valve, actuator ø 70 mm, 120 mm, ductile cast iron	82210
73	2/2-way valves DN 8 ... 50, angle seat valve, actuator ø 70 mm, stainless steel	82380
73	2/2-way valves DN 8 ... 50, angle seat valve, actuator ø 125 mm, stainless steel	82480
74	2/2-way valves DN 15 ... 50, angle seat valve with DVGW-approval	82580
75	2/2-way valves DN 8 ... 12, brass, compact	82710
76	3/2-way valves DN 15 ... 50, seat valve, gun metal, PTFE	83250
77	2/2-way valves DN 15 ... 50, diaphragm valve	83350
78	2/2-way valves DN 15 ... 150, diaphragm valve, flange, insensitive to dirt	83380
78	2/2-way valves DN 15 ... 150, diaphragm valve, flange, insensitive to dirt	83390
79	2/2-way valves DN 2 ... 10, brass, compact	84180
80	2/2-way valves DN 2 ... 10, stainless steel, compact	84190
81	2/2-way valves DN 15 ... 50, angle seat valve, brass, polymer actuator	84500
83	2/2-way valves DN 15 ... 50, angle seat valve, stainless steel, polymer actuator	84520
85	2/2-way valves DN 15 ... 25, angle seat valve, brass, actuator ø 50 mm	84720
86	2/2-way valves DN 15 ... 25, angle seat valve, stainless steel, actuator ø 50 mm	84740
87	3/2-way valves DN 1,6 ... 3, control valve	84660
87	3/2-way valves DN 1,6 ... 3, control valve	84680

Fast Find Guide

2/2- & 3/2-way valves

82160
 DN 8 ... 50
 Pressure actuated by external fluid, brass, insensitive to dirt




Page 69

82170
 DN 8 ... 50
 Pressure actuated by external fluid, brass, insensitive to dirt




Page 70

82180
 DN 15 ... 50
 Pressure actuated by external fluid, angle seat valve, actuator ø 70 mm, brass




Page 71

82280
 DN 15 ... 50
 Pressure actuated by external fluid, angle seat valve, actuator ø 125 mm, brass




Page 71

82210
 DN 15 ... 100
 Pressure actuated by external, seat valve, actuator ø 70 mm, 120 mm, ductile cast iron



Page 72

82380
 DN 15 ... 50
 Pressure actuated by external fluid, angle seat valve, actuator ø 70 mm, stainless steel



Page 73

82480
 DN 8 ... 50
 Pressure actuated by external fluid, angle seat valve, actuator ø 125 mm, stainless steel



Page 73

82580
 DN 15 ... 50
 Pressure actuated by external fluid, angle seat valve with DVGW-approval



Page 74

82710
 DN 8 ... 12
 Pressure actuated by external fluid, brass, compact



Page 75

83250
 3/2-way valves
 DN 15 ... 50
 Pressure actuated by external fluid, seat valve, gun metal, PTFE



Page 76

83350
 DN 15 ... 50
 Pressure actuated by external fluid, diaphragm valve, insensitive to dirt



Page 77

83380/83390
 DN 15 ... 150
 Pressure actuated by external fluid, diaphragm valve, flange, insensitive to dirt



Page 78

84180
 DN 2 ... 10
 Pressure actuated by external fluid, brass, compact



Page 79

84190
 DN 2 ... 10
 Pressure actuated by external fluid, stainless steel, compact



Page 80

84500
 DN 15 ... 50
 Pressure actuated by external fluid, angle seat valve, brass, polymer actuator



Page 81

84520
 DN 15 ... 50
 Pressure actuated by external fluid, angle seat valve, stainless steel, polymer actuator



Page 83

84720
 DN 15 ... 25
 Pressure actuated by external fluid, angle seat valve, brass, actuator ø 50 mm



Page 85

84740
 DN 15 ... 25
 Pressure actuated by external fluid, angle seat valve, stainless steel, actuator ø 50 mm



Page 86

84660/84680
 3/2-way valves
 DN 1,6 ... 3
 Pressure actuated by external fluid, control valve



Page 87

82160

2/2-way valves – Pressure operated by external fluid

Port size: G1/4 ... 2

Orifice: DN 8 ... 50

For fluids with high particle contamination

Optimised dimensions and weight

Fluid isolated from valve actuator

Vacuum version as an option



Technical data

Medium:

Neutral fluids
with high particle contamination

Pilot fluid:

Air max. +60°C (+140°F)

Switching function:

Normally closed
with pilot pressure

Operation:

Pressure actuated
by external fluid

Modele:

Pressure actuated seat valve with
diaphragm actuator

Mounting position:

Optional

Flow direction:

Determined

Port size:

G1/4, G3/8, G1/2, G3/4, G1,
G1 1/4, G1 1/2, G2

Pilot connection:

G1/4

Operating pressure:

0,2 ... 16 bar (2,9 ... 232 psi)

Differential pressure:

0,2 bar required (2,9 psi)

Pilot pressure:

G1/4 ... 1/2

max. 6 bar (87 psi)

higher than operating pressure

G3/4 ... 2

max. 1 bar (14 psi)

higher than operating pressure

Fluid temperature:

–10 ... +90°C (+14 ... +194°F)

Ambient temperature:

–10 ... +60°C (+14 ... +140°F)

Viscosity:

Max. 80 mm²/s

Material:

Body: Brass (CW617N)

Cover: Brass (2.0402)

Seat seals: NBR

Internal parts: Brass,

stainless steel

Main sealing element:

Fabric reinforced NBR

diaphragm with valve plate

Valve seat: Brass

Standard models

Symbol	Port size	Orifice (mm)	Pilot connection	Flow kv value *1) (m³/h)	Operating pressure *2) (bar)	(psi)	Weight (kg)	Model
	G1/4	8	G1/4	1,7	0,2 ... 16	2,9 ... 232	0,5	8216000.0000.00000
	G3/8	10	G1/4	3,4	0,2 ... 16	2,9 ... 232	0,45	8216100.0000.00000
	G1/2	12	G1/4	4	0,2 ... 16	2,9 ... 232	0,4	8216200.0000.00000
	G3/4	20	G1/4	11	0,2 ... 16	2,9 ... 232	1,15	8216300.0000.00000
	G1	25	G1/4	13	0,2 ... 16	2,9 ... 232	1	8216400.0000.00000
	G1 1/4	32	G1/4	28	0,2 ... 16	2,9 ... 232	2,35	8216500.0000.00000
	G1 1/2	40	G1/4	31	0,2 ... 16	2,9 ... 232	2,1	8216600.0000.00000
	G2	50	G1/4	46	0,2 ... 16	2,9 ... 232	3,35	8216700.0000.00000

*1) Cv-value (US) ≈ kv value x 1,2

*2) For gases and liquid fluids up to 80 mm²/s (cSt)

82170

2/2-way valves – Pressure operated by external fluid

Port size: G1/4 ... 2

Orifice: DN 8 ... 50

For fluids with high particle contamination

Optimised dimensions and weight

Fluid isolated from valve actuator

*NPT-connection available:
change 82170 to 82270*



Technical data

Medium:

Neutral gases and liquid fuels

Pilot fluid:

Air max. +60°C (+140°F)

Switching function:

Normally closed
with pilot pressure

Operation:

Pressure actuated
by external fluid

Mounting position:

Optional

Flow direction:

Determined

Port size:

G1/4, G3/8, G1/2, G3/4, G1,
G1 1/4, G1 1/2, G2

Pilot connection:

G1/4

Operating pressure:

0,2 ... 16 bar (2,9 ... 232 psi)

Differential pressure:

0,2 bar (2,9 psi) required

Pilot pressure:

G1/4 ... 1/2
1 ... 16 bar (14 ... 232 psi)
max. 6 bar (87 psi)
higher than operating pressure;
G3/4 ... 2
1 ... 16 bar (14 ... 232 psi)
max. 1 bar (14 psi)
higher than operating pressure

Fluid temperature:

–10 ... +60°C (+14 ... +140°F)

Ambient temperature:

–10 ... +50°C (+14 ... +122°F)

Material:

Body: Brass
Seat seals: NBR
Internal parts: Brass,
stainless steel
Main sealing element:
Fabric reinforced NBR diaphragm
with valve plate

Standard models

Symbol	Port size	Orifice	Flow kv value *1)	Operating pressure *2)	Weight Standard	Weight Pulse Solenoid	Model Standard	Model Pulse Solenoid
		(mm)	(m³/h)	(bar)	(psi)	(kg)		
	G1/4	8	1,7	0,2 ... 16	2,9 ... 232	1,32	8217000.9301.xxxxx	8217000.8821.xxxxx
	G3/8	10	3,4	0,2 ... 16	2,9 ... 232	1,27	8217100.9301.xxxxx	8217100.8821.xxxxx
	G1/2	12	4	0,2 ... 16	2,9 ... 232	1,22	8217200.9301.xxxxx	8217200.8821.xxxxx
	G3/4	20	11	0,2 ... 16	2,9 ... 232	1,97	8217300.9301.xxxxx	8217300.8821.xxxxx
	G1	25	13	0,2 ... 16	2,9 ... 232	1,82	8217400.9301.xxxxx	8217400.8821.xxxxx
	G1 1/4	32	28	0,2 ... 16	2,9 ... 232	3,17	8217500.9301.xxxxx	8217500.8821.xxxxx
	G1 1/2	40	31	0,2 ... 16	2,9 ... 232	2,92	8217600.9301.xxxxx	8217600.8821.xxxxx
	G2	50	46	0,2 ... 16	2,9 ... 232	4,17	8217700.9301.xxxxx	8217700.8821.xxxxx

xxxxx Please insert voltage and frequency codes

*1) Cv-value (US) ≈ kv value x 1,2

*2) For gases and liquid fluids up to 80 mm²/s (cSt)

Standard solenoid systems

Voltage and Frequency Solenoid 9301 *3)					
Code Voltage	Code Frequency	Voltage	Frequency	Power consumption Inrush	Holding
024	00	24 V d.c.	-	18 W	18 W
024	50	24 V a.c.	50 Hz	106 VA	35 VA
110	50	110 V a.c.	50 Hz	106 VA	35 VA
120	60	120 V a.c.	60 Hz	106 VA	35 VA
230	50	230 V a.c.	50 Hz	106 VA	35 VA

*3) US coil only

Further versions on request!

Electrical details for all solenoid systems

Design	DIN VDE 0580
Voltage range	±10%
Duty cycle	100% ED
Protection class	EN 60529 IP65
Socket	Form A acc. to DIN EN 175301-803 (included)

According to DIN VDE 0580 at a solenoid temperature of +20°C (+68°F).
At operating state temperature the input power of a coil decreases by up to ca. 30% due to physical reasons.

82180/82280

2/2-way valves – Pressure operated by external fluid

Port size: G1/2 ... 2

Orifice: DN 15 ... 50

High flow rate

Suitable for vacuum up to max. 90%

Suitable for contaminated process fluid

Damped closing

(Valve closes against flow direction)

NPT-connection available:

change 82180 to 82190

change 82280 to 82290



Technical data

Medium:

Neutral gases and liquids

Pilot fluid:

Neutral gases max. +80°C
(+176°F)

Switching function:

Normally closed

Operation:

Pressure actuated
by external fluid

Mounting position:

Optional

Flow direction:

Determined

Port size:

G1/2, G3/4, G1,
G1 1/4, G1 1/2, G2

Pilot connection:

G1/4

Operating pressure:

See table

Pilot pressure:

3,5 ... 8 bar (50,7 ... 116 psi)

Fluid temperature:

–10 ... +180°C (+14 ... +356°F)

Ambient temperature:

–10 ... +60°C (+14 ... +140°F)

Material:

Process fluid characteristics:

Body: Brass (CW617N)

Seat seal: PTFE

Internal parts: Brass,

stainless steel

Spindle sealing: PTFE / FPM,
self-adjustable

Pilot fluid characteristics:

Body: Stainless steel, aluminium

Bottom: WEMA-Kor, coated

Seat seals: NBR

Internal parts: Coated steel

Standard models

Symbol	Port size	Orifice (mm)	Actuator ø (mm)	Flow kv value *1) (m³/h)	Operating pressure *2) (bar)	Operating pressure *2) (psi)	Weight (kg) *3)	Model *3)
	G1/2	15	70	4,8	0 ... 16	0 ... 232	1,4	8218200.0000.00000
	G3/4	20	70	10	0 ... 10	0 ... 145	1,5	8218300.0000.00000
	G1	25	70	14	0 ... 10	0 ... 145	1,8	8218400.0000.00000
	G1 1/4	32	70	23	0 ... 7	0 ... 101	2,4	8218500.0000.00000
	G1 1/2	40	70	30	0 ... 4,5	0 ... 65	2,7	8218600.0000.00000
	G2	50	70	37	0 ... 3	0 ... 43	3,9	8218700.0000.00000
	G1 1/4	32	125	27	0 ... 16	0 ... 232	5,3	8228500.0000.00000
	G1 1/2	40	125	37	0 ... 10	0 ... 145	5,5	8228600.0000.00000
	G2	50	125	53	0 ... 10	0 ... 145	7,7	8228700.0000.00000

*1) Cv-value (US) ≈ kv value x 1,2

*2) For gases and liquid fluids up to 600 mm²/s (cSt)

*3) Without pilot valve

Notes

for 3/2-way pilot valve 84660/84680

Material	Body Aluminium
Pilot fluid temperature	max. +60°C
Pilot pressure	1 ... 10 bar
Standard voltages	24 V d.c., 24 V a.c., 230 V a.c.

Electrical Data

for 3/2-way pilot valve 84660/84680

Design acc. to	DIN VDE 0580
Voltage range	±10%
Duty cycle	100% ED
Protection class	EN 60529 IP65 with mounted socket
Socket	Form A acc. to DIN EN 175301-803 (included)
Technical data	See publication N/en 5.8.640

Further versions on request!

82210

2/2-way valves – Pressure operated by external fluid

Port size: Flange PN 16

Orifice: DN 15 ... 100

High flow rate

Damped closing
(Valve closes against flow direction)

Suitable for contaminated process fluids



CE EAC

Technical data

Medium:

For neutral gaseous and liquid fluids

Switching function:

Normally closed

Operation:

Pressure actuated by external fluid

Mounting position:

Optional, preferably actuator vertical on top

Flow direction:

Determined

Port size:

DN 15, DN 20, DN 25, DN 32, DN 40, DN 50, DN 65, DN 80, DN 100

Pilot connection:

G1/4

Operating pressure:

See table

Pilot pressure:

See table

Fluid temperature:

–10° ... +180°C (+14° ... +356°F)

Ambient temperature:

–10° ... +60°C (+14° ... +140°F)

Material:

Body: Ductile cast iron (EN-GJS-400-18-LT)

Seat seal: PTFE

Internal parts: 1.4571, 1.4568, 1.4305, brass

Standard models

Symbol	Orifice (mm)	Flow kv value *1) (m³/h)	Pilot pressure (bar)	Operating pressure *2) (bar)	(psi)	Weight (kg)	Model
	15	4,6	5,5 ... 10	0 ... 16	0 ... 232	3,2	8221200.0000.00000
	20	8	5,5 ... 10	0 ... 16	0 ... 232	4,1	8221300.0000.00000
	25	13	5,5 ... 10	0 ... 10	0 ... 145	4,8	8221400.0000.00000
	32	22	4 ... 8	0 ... 16	0 ... 232	10,7	8221500.0000.00000
	40	35	4 ... 8	0 ... 12	0 ... 174	11,1	8221600.0000.00000
	50	50	5,5 ... 8	0 ... 10	0 ... 145	14,6	8221700.0000.00000
	65	90	5,5 ... 8	0 ... 7	0 ... 101	20	8221800.0000.00000
	80	127	5,5 ... 8	0 ... 5	0 ... 72	24,4	8221900.0000.00000
	100	200	5,5 ... 8	0 ... 2,5	0 ... 36	31	8222000.0000.00000

*1) Cv-value (US) \approx kv value x 1,2

*2) For gases and liquid fluids up to 600 mm²/s (cSt)

Notes

for 3/2-way pilot valve 84660/84680

Material	Body Aluminium
Pilot fluid temperature	max. +60°C
Pilot pressure	1 ... 10 bar
Standard voltages	24 V d.c., 24 V a.c., 230 V a.c.

Electrical Data

for 3/2-way pilot valve 84660/84680

Design acc. to	DIN VDE 0580
Voltage range	$\pm 10\%$
Duty cycle	100% ED
Protection class	EN 60529 IP65 with mounted socket
Socket	Form A acc. to DIN EN 175301-803 (included)
Technical data	See publication N/en 5.8.640

Further versions on request!

82380/82480

2/2-way valves – Pressure operated by external fluid

Port size: G1/2 ... 2

Orifice: DN 15 ... 50

For robust industry applications

Suitable for contaminated process fluids

Suitable for vacuum up to max. 90%

High flow rate

Damped closing

(Valve closes against flow direction)

NPT-connection available:

change 82380 to 82390

change 82480 to 82490



Stainless Steel



Technical data

Medium:

Aggressive gases and liquids

Pilot fluid:

Neutral gases max. +80°C
(+176°F)

Switching function:

Normally closed

Operation:

Pressure actuated
by external fluid

Mounting position:

Optional

Flow direction:

Determined

Port size:

G1/2, G3/4, G1,
G1 1/4, G1 1/2, G2

Pilot connection:

G1/4

Operating pressure:

See table

Pilot pressure:

3,5 ... 8 bar (51 ... 116 psi)

Fluid temperature:

–10 ... +180°C (+14 ... +356°F)

Ambient temperature:

–10 ... +60°C (+14 ... +140°F)

Material:

Process fluid characteristics:

Body: Stainless steel (1.4408)

Seat seal: PTFE

Internal parts: Stainless steel

Spindle sealing: PTFE / FPM,
self-adjustable

Pilot fluid characteristics:

Body: Stainless steel, aluminium

Bottom: WEMA-Kor, coated

Seat seals: NBR

Internal parts: Steel, coated

Standard models

Symbol	Port size	Orifice (mm)	Actuator ø (mm)	Flow kv value *1) (m³/h)	Operating pressure *2) (bar)	Operating pressure *2) (psi)	Weight (kg) *3)	Model *3)
	G1/2	15	70	4,8	0 ... 16	0 ... 232	1,3	8238200.0000.00000
	G3/4	20	70	10	0 ... 10	0 ... 145	1,4	8238300.0000.00000
	G1	25	70	14	0 ... 10	0 ... 145	1,7	8238400.0000.00000
	G1 1/4	32	70	23	0 ... 7	0 ... 101	2,4	8238500.0000.00000
	G1 1/2	40	70	30	0 ... 4,5	0 ... 65	2,6	8238600.0000.00000
	G2	50	70	37	0 ... 3	0 ... 43	3,8	8238700.0000.00000
	G1 1/4	32	125	27	0 ... 16	0 ... 232	5,1	8248500.0000.00000
	G1 1/2	40	125	37	0 ... 10	0 ... 145	5,5	8248600.0000.00000
	G2	50	125	53	0 ... 10	0 ... 145	7	8248700.0000.00000

*1) Cv-value (US) ≈ kv value x 1,2

*2) For gases and liquid fluids up to 600 mm²/s (cSt)

*3) Without pilot valve

Notes

for 3/2-way pilot valve 84660/84680

Material	Body Aluminium
Pilot fluid temperature	max. +60°C
Pilot pressure	1 ... 10 bar
Standard voltages	24 V d.c., 24 V a.c., 230 V a.c.

Electrical Data

for 3/2-way pilot valve 84660/84680

Design acc. to	DIN VDE 0580
Voltage range	±10%
Duty cycle	100% ED
Protection class	EN 60529 IP65 with mounted socket
Socket	Form A acc. to DIN EN 175301-803 (included)
Technical data	See publication N/en 5.8.640

Further versions on request!

82580

2/2-way valves with DVGW-approval – Pressure operated by external fluid

Port size: G1/2 ... 2

Orifice: DN 15 ... 50

EU type examination certificate Product ID-No.: CE-0085AT0091

Valve class A, valve group 2

High function reliability

Short response time < 1 s

For robust industry applications

Qualification approval acc. to EN 161/EN 16678



Technical data

Medium:

Neutral burnable gases and other neutral gases

Pilot fluid:

Neutral gases max. +80°C (+176°F)

Switching function:

Normally closed

Operation:

Pressure actuated by external fluid

Mounting position:

Optional

Flow direction:

Determined

Port size:

G1/2, G3/4, G1, G1 1/4, G1 1/2, G2

Pilot connection:

G1/4

Operating pressure:

0 ... 10 bar (0 ... 145 psi)

Pilot pressure:

5 ... 8 bar (72 ... 116 psi)

Fluid temperature:

–10 ... +60°C (+14 ... +140°F)

Ambient temperature:

–10 ... +60°C (+14 ... +140°F)

Material:

Process fluid characteristics:

Body: Brass (CW617N)

Seat seal: FPM

Body seal: FPM

Internal parts: Brass, stainless steel

Spindle sealing: PTFE / FPM, self-adjustable

Material:

Pilot fluid characteristics:

Body: Stainless steel (1.4408)


Bottom: Alu WEMA-Kor, coated

Seat seals: NBR

Internal parts: Steel, coated

For contaminated fluids insertion of a strainer is recommended.

Standard models

Symbol	Port size	Orifice (mm)	Flow kv value *1) (m³/h)	Operating pressure *2) (bar)	(psi)	Weight (kg) *3)	Model *3)
	G1/2	15	4,8	0 ... 10	0 ... 145	1,4	8258200.0000.xxxxx
	G3/4	20	10	0 ... 10	0 ... 145	1,5	8258300.0000.xxxxx
	G1	25	14	0 ... 10	0 ... 145	1,8	8258400.0000.xxxxx
	G1 1/4	32	23	0 ... 10	0 ... 145	2,4	8258500.0000.xxxxx
	G1 1/2	40	30	0 ... 10	0 ... 145	2,7	8258600.0000.xxxxx
	G2	50	37	0 ... 7	0 ... 145	3,9	8258700.0000.xxxxx

xxxxx Please insert voltage and frequency codes

*1) Cv-value (US) ≈ kv value x 1,2

*2) For gases and liquid fluids up to 400 mm²/s (cSt)

*3) 0000 = without pilot valve

0247 = with pilot valve for V d.c.

0247 = with pilot valve for V a.c.

Notes

for 3/2-way pilot valve

Material	Body Brass
Pilot fluid temperature	–10 ... +80°C (+14 ... 176°F)
Pilot pressure	5 ... 8 bar (72,5 ... 116 psi)
Standard voltages	24 V d.c., 24 V a.c., 230 V a.c.

Electrical Data

for 3/2-way pilot valve

Design acc. to	DIN VDE 0580
Voltage range	±10%
Duty cycle	100% ED
Protection class	EN 60529 IP65 with mounted socket
Socket	Form A acc. to DIN EN 175301-803 (included)
Technical data	Please contact a member of our sales team, to check the model number. (Fon +49 5731/791-0)

Further versions on request!

82710

2/2-way valves – Pressure operated by external fluid

Port size: G1/4 ... 1/2

Orifice: DN 8 ... 12

Suitable for contaminated process fluids

Optical position indicator is standard

Spindle seal with diaphragm

*NPT-connection available:
change 82710 to 82750*



Technical data

Medium:

Neutral gases and liquids

Pilot fluid:

Air, water, hydraulic oil
max. +90°C (+194°F)

Switching function:

Normally closed

Operation:

Pressure actuated
by external fluid

Mounting position:

Optional

Flow direction:

Optional

Port size:

G1/4, G3/8, G1/2

Pilot connection:

G1/8

Operating pressure:

–0,9 ... 6 bar (–13 ... 87 bar)

Pilot pressure:

3 ... 8 bar (44 ... 116 bar)

Fluid temperature:

–10 ... +90°C (+14 ... +194°F)

Ambient temperature:

–10 ... +50°C (+14 ... +122°F)

Material:

Process fluid characteristics:

Body: Brass


Seat seal: Fabric reinforced NBR
diaphragm

Pilot fluid characteristics:

Body: Brass, PPO (cover)

Seat seal: Fabric reinforced NBR
diaphragm


Standard models

Symbol	Port size	Orifice (mm)	Flow kv value *1) (m³/h)	Operating pressure *2) (bar)	Operating pressure *2) (psi)	Pilot pressure *3)	Weight (kg)	Model
	G1/4	8	1,9	–0,9 ... 6	–13 ... 87	3 ... 8	0,75	8271000.0000.00000
	G3/8	10	2,4	–0,9 ... 6	–13 ... 87	3 ... 8	0,72	8271100.0000.00000
	G1/2	12	2,9	–0,9 ... 6	–13 ... 87	3 ... 8	0,7	8271200.0000.00000

*1) Cv-value (US) ≈ kv value x 1,2

*2) For gases and liquid fluids up to 80 mm²/s (cSt)

*3) For vacuum inset min. pilot pressure 4 bar

Note: Stainless steel design for number 51, 51, 52 

Note:

A 3/2 way solenoid pilot valve can be fitted at the pilot connection Z. These pilot valves are only for air, look at documentation N/en 5.8.640.

Required parts	Model
3/2-way solenoid valve DN 1,6	8466053.910x.xxxxx

83250

3/2-way valves – Pressure operated by external fluid

Port size: G1/2 ... 2

Orifice: DN 15 ... 50

Can be used as Y-pattern/selector valve (pressure connected to A)

Suitable for steam

High flow rate



Technical data

Medium:

Neutral gases and liquids

Pilot fluid:

Neutral gases max. +60°C (+140°F)

Switching function:

Normally closed from P to A, opened from P to A by pilot pressure

Operation:

Pressure actuated by external fluid

Mounting position:

Optional

Flow direction:

Determined

Port size:

G1/2, G3/4, G1, G1 1/4, G1 1/2, G2

Pilot connection:

G1/4

Operating pressure:

0 ... 10/16 bar (0 ... 145/232 psi)

Pilot pressure:

5.5 ... 7 bar (80 ... 102 psi)

Fluid temperature:

–10 ... +180°C (+14 ... +356°F)

Ambient temperature:

–10 ... +80°C (+14 ... +176°F)

Material:

Process fluid characteristics:

Body: Gun metal

Seat seal: PTFE

Internal parts: Stainless steel, brass

Spindle sealing: PTFE / EPDM

Pilot fluid characteristics:

Body: Aluminium

Seat seals: NBR

Internal parts: Brass, stainless steel

Standard models

Symbol	Port size	Orifice (mm)	Flow kv value *1) (m³/h)		Operating pressure *2) (bar)		Weight (kg)	Model
	G1/2	15	5,8	3	0 ... 16	0 ... 232	1,6	8325200.0000.00000
	G3/4	20	11,5	7	0 ... 16	0 ... 232	1,8	8325300.0000.00000
	G1	25	18	12,5	0 ... 10	0 ... 145	2,1	8325400.0000.00000
	G1 1/4	32	25	15	0 ... 16	0 ... 232	6,6	8325500.0000.00000
	G1 1/2	40	39	27	0 ... 14	0 ... 203	6,8	8325600.0000.00000
	G2	50	64	43	0 ... 10	0 ... 145	7,9	8325700.0000.00000

*1) Cv-value (US) ≈ kv value x 1,2

*2) For gases and liquid fluids up to 400 mm²/s (cSt)

3/2-way pilot valve

An electrical solenoid valve can be attached at the pilot connection Z.

Required parts	Model
3/2-way solenoid valve	8466000.9101.xxxxx (d.c.)
	8466000.9101.xxxxx (a.c.)

Further versions on request!

83350

2/2-way valves – Pressure operated by external fluid

Port size: G1/2 ... 2

Orifice: DN 15 ... 50

Any flow direction and mounting position

Special seal materials are required for use with oil and oleiferous media



Technical data

Medium:

Neutral gases and liquid fluids

Pilot fluid:

Air max. +40°C (+104°F)

Switching function:

Normally closed;
closed by spring force,
opened by pilot pressure

Operation:

Pressure actuated
by external fluid

Mounting position:

Optional

Flow direction:

Optional

Port size:

G1/2, G3/4, G1,
G1 1/4, G1 1/2, G2

Pilot connection:

G1/4

Operating pressure:

0 ... 10 bar (0 ... 145 psi)

Pilot pressure:

5.5 ... 7 bar (80 ... 101 psi)

Fluid temperature:

–10 ... +80°C (+14 ... +176°F)

Ambient temperature:

–10 ... +55°C (+14 ... +131°F)

Material:

Process fluid characteristics:

Body: Grey cast iron

Seat seal: EPDM

Pilot fluid characteristics:

Body: Polymer material

Seat seals: NBR

Internal parts: Steel, coated

Standard models

Symbol	Port size	Orifice (mm)	Flow kv value *1) (m³/h)	Operating pressure *2) (bar)	Weight *3) (kg)	Model *3)
	G1/2	15	7	0 ... 10	1,9	8335200.0000.00000
	G3/4	20	15	0 ... 10	2	8335300.0000.00000
	G1	25	20	0 ... 10	2,3	8335400.0000.00000
	G1 1/4	32	37	0 ... 10	4,5	8335500.0000.00000
	G1 1/2	40	41	0 ... 10	4,9	8335600.0000.00000
	G2	50	82	0 ... 10	8,6	8335700.0000.00000

*1) Cv-value (US) ≈ kv value x 1,2

*2) For gases and liquid fluids up to 400 mm²/s (cSt)

*3) Without pilot valve

Notes

for 3/2-way pilot valve 84660/84680

Material	Body aluminium
Pilot fluid temperature	max. +60°C (+140°F)
Pilot pressure	1 ... 10 bar
Standard voltages	24 V d.c., 24 V a.c., 230 V a.c.

Electrical data

for 3/2-way pilot valve 84660/84680

Design	DIN VDE 0580
Voltage range	±10%
Duty cycle	100% ED
Protection class	EN 60529 IP65 with mounted socket
Socket	Form A acc. to DIN EN 175301-803 (included)
Technical data	See publication N/en 5.8.640

Further versions on request!

83380/83390

2/2-way valves – Pressure operated by external fluid

Port size: Flange PN 10

Orifice: DN 15 ... 150

Any flow direction and mounting position

**Special seal materials are required
for use with oil and oleiferous media**



CE EAC

Technical data

Medium:

Neutral gases and liquid fluids

Pilot fluid:

Air max. +40°C (+104°F)

Switching function:

Normally closed;
closed by spring force,
opened by pilot pressure

Operation:

Pressure actuated
by external fluid

Mounting position:

Optional

Flow direction:

Determined

Port size:

DN 15, DN 20, DN 25, DN 32,
DN 40, DN 50, DN 65, DN 80,
DN 100, DN 125, DN 150

Pilot connection:

G1/4

Operating pressure:

See table

Pilot pressure:

5,5 ... 7 bar (80 ... 101 psi)

Fluid temperature:

–10 ... +80°C (+14 ... +176°F)

Ambient temperature:

–10 ... +55°C (+14 ... +131°F)

Material:

Process fluid characteristics:

Body: Grey cast iron

Seat seal: EPDM

Pilot fluid characteristics:

Body: Polymer material

Seat seals: NBR

Internal parts: Steel, coated

Standard models

Symbol	Orifice (mm)	Flow kv value *1) (m³/h)	Operating pressure *2) (bar)	(psi)	Weight *3) (kg)	Model *3)
	15	7	0 ... 10	0 ... 145	3,1	8338200.0000.00000
	20	14	0 ... 10	0 ... 145	3,7	8338300.0000.00000
	25	20	0 ... 10	0 ... 145	4,2	8338400.0000.00000
	32	37	0 ... 10	0 ... 145	7,7	8338500.0000.00000
	40	40	0 ... 10	0 ... 145	8,2	8338600.0000.00000
	50	82	0 ... 10	0 ... 145	13,7	8338700.0000.00000
	65	102	0 ... 6	0 ... 87	26	8338800.0000.00000
	80	165	0 ... 8	0 ... 116	30	8338900.0000.00000
	100	241	0 ... 6	0 ... 87	48	8339000.0000.00000
	125	378	0 ... 8	0 ... 116	91	8339100.0000.00000
	150	496	0 ... 6	0 ... 87	104	8339200.0000.00000

*1) Cv-value (US) \approx kv value x 1,2

*2) For gases and liquid fluids up to 400 mm²/s (cSt)

*3) Without pilot valve

Notes

for 3/2-way pilot valve 84660/84680

Material	Body Aluminium
Pilot fluid temperature	max. +60°C (+140°F)
Pilot pressure	1 ... 10 bar (14,5 ... 145 psi)
Standard voltages	24 V d.c., 24 V a.c., 230 V a.c.

Electrical Data

for 3/2-way pilot valve 84660/84680

Design acc. to	DIN VDE 0580
Voltage range	$\pm 10\%$
Duty cycle	100% ED
Protection class	EN 60529 IP 65 with mounted socket
Socket	Form A acc. to DIN EN 175301-803 (included)
Technical data	See publication en 5.8.640

An electrical solenoid valve can be attach at the pilot connection Z.

Required Parts	Model
DN 15 ... 50	
1 pcs. 3/2-way solenoid valve	8466000.9101.xxxxx Please insert voltage and frequency codes
Required Parts	Model
DN 65 ... 100	
1 pcs. 3/2-way solenoid valve for gases fluids	8020750.0246.xxxxx Please insert voltage and frequency codes
1 pcs. 3/2-way solenoid valve for liquid fluids	2401103.0801.xxxxx Please insert voltage and frequency codes

Further versions on request!

84180

2/2-way valves – Pressure operated by external fluid

Port size: G1/8 ... 1/2

Orifice: DN 2 ... 10

Actuator may be rotated 360°

Suitable for vacuum up to max. 90%

Suitable for contaminated process fluid

Compact miniature actuator ø 30 mm

Reversed flow direction optional

*NPT-connection available:
change 84180 to 84380*



Technical data

Medium:

Neutral aggressive gases and liquids up to 600 mm²/s

Pilot fluid:

Neutral gases max. +60°C (+140°F)

Switching function:

Normally closed

Operation:

Pressure actuated
by external fluid

Mounting position:

Optional

Flow direction:

Determined

Port size:

G1/8, G1/4, G3/8, G1/2

Pilot connection:

M5

Operating pressure:

0 ... 25 bar (0 ... 362 psi)

Pilot pressure:

4 ... 10 bar (58 ... 145 psi)

Fluid temperature:

–10 ... +90°C (–14 ... +194°F)

Ambient temperature:

–10 ... +60°C (–14 ... +140°F)

Material:

Process fluid characteristics:

Body: Brass (CW617N)

Seat seals: NBR

Seat seal: PTFE

Internal parts: Stainless steel, Brass

Seal packing: PTFE / NBR self-adjustable

Material:

Pilot fluid characteristics:

Body: Brass

Seat seals: NBR

Seat seal: PTFE

Internal parts: Stainless steel / brass

Standard models

Symbol	Port size	Orifice (mm)	Pilot pressure (bar)	Pilot pressure (psi)	Flow kv value *1 (m ³ /h)	Operating pressure *2 (bar)	Operating pressure *2 (psi)	Weight (kg)	Model
	G1/8	2	4 ... 10	58 ... 145	0,12	0 ... 25	0 ... 362	0,35	8418800.0000.00000
	G1/4	4	4 ... 10	58 ... 145	0,35	0 ... 25	0 ... 362	0,33	8418020.0000.00000
	G3/8	6	4 ... 10	58 ... 145	0,6	0 ... 20	0 ... 290	0,32	8418140.0000.00000
	G1/2	10	4 ... 10	58 ... 145	1,8	0 ... 8	0 ... 116	0,47	8418260.0000.00000

*1) Cv-value (US) ≈ kv value x 1,2

*2) For gases and liquid fluids up to 600 mm²/s (cSt)

Clip angle M5 standard

84190

2/2-way valves – Pressure operated by external fluid

Port size: G1/8 ... 1/2

Orifice: DN 2 ... 10

Actuator may be rotated 360°

Suitable for vacuum up to max. 90%

Suitable for contaminated process fluid

Compact miniature actuator ø 30 mm

Reversed flow direction optional

*NPT-connection available:
change 84190 to 84390*



Stainless Steel

Technical data

Medium:

Neutral aggressive gases and liquids up to 600 mm²/s

Pilot fluid:

Neutral gases max. +60°C (+140°F)

Switching function:

Normally closed

Operation:

Pressure actuated by external fluid

Mounting position:

Optional

Flow direction:

Determined

Port size:

G1/8, G1/4, G3/8, G1/2

Pilot connection:

M5

Operating pressure:

0 ... 25 bar (0 ... 362 psi)

Pilot pressure:

4 ... 10 bar (58 ... 145 psi)

Fluid temperature:

–10 ... +90°C (+14 ... +194°F)

Ambient temperature:

–10 ... +60°C (+14 ... +140°F)

Material:

Process fluid characteristics:

Body: Stainless steel (1.4408)

Seat seals: NBR

Seat seal: PTFE

Internal parts: Stainless steel

Seal packing: PTFE / NBR

self-adjustable

Material:

Pilot fluid characteristics:

Body: Stainless steel (1.4404)

Seat seals: NBR

Internal parts: Stainless steel /

brass

Standard models

Symbol	Port size	Orifice (mm)	Pilot pressure (bar)	Pilot pressure (psi)	Flow kv value *1 (m ³ /h)	Operating pressure *2 (bar)	Operating pressure *2 (psi)	Weight (kg)	Model
	G1/8	2	4 ... 10	58 ... 145	0,12	0 ... 25	0 ... 362	0,34	8419800.0000.00000
	G1/4	4	4 ... 10	58 ... 145	0,35	0 ... 25	0 ... 362	0,32	8419020.0000.00000
	G3/8	6	4 ... 10	58 ... 145	0,6	0 ... 20	0 ... 290	0,31	8419140.0000.00000
	G1/2	10	4 ... 10	58 ... 145	1,8	0 ... 8	0 ... 116	0,45	8419260.0000.00000

*1) Cv-value (US) ≈ kv value x 1,2

*2) For gases and liquid fluids up to 600 mm²/s (cSt)

Clip angle M5 standard

84500

2/2-way valves – Pressure operated by external fluid

Port size: G1/2 ... 2

Orifice: DN 15 ... 50

Easy rebuilding into »normally open« or »double-acting« without tools

Optical position indicator is standard

Suitable for vacuum up to max. 90%

Suitable for contaminated flow fluid

Damped closing (Valve closes against flow direction)

Reversed flow direction optional

*NPT-connection available:
change 84500 to 84510*



Technical data

Medium:

Neutral gases and liquids

Pilot fluid:

Neutral gases max. +60°C
(+14°F)

Switching function:

Normally closed

Operation:

Pressure actuated
by external fluid

Mounting position:

Optional

Flow direction:

Determined

Port size:

G1/2, G3/4, G1,
G1 1/4, G1 1/2, G2

Pilot connection:

G1/4

Operating pressure:

See table

Pilot pressure:

3,5 ... 10 bar (51 ... 145 psi)

Fluid temperature:

–10 ... +180°C (+14 ... +356°F)

Ambient temperature:

–10 ... +60°C (+14 ... +140°F)

Material:

Process fluid characteristics:

Body: Brass (CW617N)

Seat seal: PTFE

Internal parts: Brass, stainless steel

Spindle sealing: PTFE / FPM, self-adjustable

Material:

Pilot fluid characteristics:

Body: Polyamid 66

with glass fibre 30%

Seat seals: NBR

Internal parts: Brass, stainless steel

Standard models

Symbol	Port size	Orifice (mm)	Flow kv value *1) (m³/h)	Operating pressure *2) (bar)	Operating pressure *2) (psi)	Weight (kg) *3)	Model *3)
	G1/2	15	4,8	0 ... 16 (25)	0 ... 232 (362)	1,4	8450200.0000.00000
	G3/4	20	10	0 ... 10 (16)	0 ... 145 (232)	1,5	8450300.0000.00000
	G1	25	14	0 ... 10	0 ... 145	1,8	8450400.0000.00000
	G1 1/4	32	23	0 ... 7	0 ... 101	2,4	8450500.0000.00000
	G1 1/2	40	30	0 ... 4.5	0 ... 65	2,7	8450600.0000.00000
	G2	50	37	0 ... 3	0 ... 43	3,9	8450700.0000.00000

*1) Cv-value (US) ≈ kv value x 1,2

*2) For gases and liquid fluids up to 600 mm²/s (cSt)

*3) Without pilot valve

⚠-Note:

For hazardous areas, e. g. Zone 1/2 or 21/22, the kit 1264287 is required.

It contains an additional sign, a silencer as dust shield and a conformity explanation.

The maximum fluid temperature is reduced to +85°C (+185°F).

84500

2/2-way valves – Pressure operated by external fluid

Notes for 3/2-way pilot valve 84660/84680

Material	Body Aluminium
Pilot fluid temperature	max. +60°C
Pilot pressure	1 ... 10 bar
Standard voltages	24 V d.c., 24 V a.c., 230 V a.c.

Electrical Data for 3/2-way pilot valve 84660/84680

Design acc. to	DIN VDE 0580
Voltage range	±10%
Duty cycle	100% ED
Protection class	EN 60529 IP65 with mounted socket
Socket	Form A acc. to DIN EN 175301-803 (included)
Technical data	See publication N/en 5.8.640

Further versions on request!

Notes for 3/2-way pilot vale 97100 hole pattern NAMUR

Material	Body Aluminium elox
Pilot fluid temperature	–10 ... +50°C (+14 ... +122°F)
Pilot pressure	2 ... 8 bar
Standard voltages	24 V d.c., 24 V a.c., 230 V a.c.

Electrical Data for 3/2-way pilot valve 97100 hole pattern NAMUR

Design acc. to	DIN VDE 0580
Voltage range	±10%
Duty cycle	100% ED
Protection class	EN 60529 IP65 with mounted socket
Socket	Form A acc. to DIN EN 175301-803 (included)
Technical data	See publication N/en 5.4.372

Mounting accessories (NAMUR)

Interface plate NAMUR hole pattern for retrofit
(Part-Number 1256566) consist of:
1x NAMUR-interface plate
2x Adapter screw
2x O-ring

84520

2/2-way valves – Pressure operated by external fluid

Port size: G1/2 ... 2

Orifice: DN 15 ... 50

Easy rebuilding into »normally open« or »double-acting« without tools

Optical position indicator is standard

Damped closing (Valve closes against flow direction)

Suitable for contaminated flow fluid

Suitable for vacuum up to max. 90%

*NPT-connection available:
change 84520 to 84530*



Stainless Steel



Technical data

Medium:

Aggressive gases and liquids

Pilot fluid:

Neutral gases max. +60°C
(+140°F)

Switching function:

Normally closed

Operation:

Pressure actuated
by external fluid

Mounting position:

Optional

Flow direction:

Determined

Port size:

G1/2, G3/4, G1,
G1 1/4, G1 1/2, G2

Pilot connection:

G1/4

Operating pressure:

See table

Pilot pressure:

3,5 ... 10 bar (51 ... 145 psi)

Fluid temperature:

–10 ... +180°C (+14 ... +356°F)

Ambient temperature:

–10 ... +60°C (+14 ... +140°F)

Material:

Process fluid characteristics:
Body: Stainless steel (1.4581)

Seat seal: PTFE

Internal parts: Stainless steel

Spindle sealing: PTFE / FPM,
self-adjustable

Material:

Pilot fluid characteristics:

Body: Polyamid 66

with glass fibre 30%

Seat seals: NBR

Internal parts: Brass, stainless
steel, 1.8159, 1.1200

Standard models

Symbol	Port size	Orifice (mm)	Flow kv value *1) (m³/h)	Operating pressure *2) (bar)	Operating pressure *2) (psi)	Weight (kg) *3)	Model *3)
	G1/2	15	4,8	0 ... 16 (25)	0 ... 232 (362)	1,4	8452200.0000.00000
	G3/4	20	10	0 ... 10 (16)	0 ... 145 (232)	1,5	8452300.0000.00000
	G1	25	14	0 ... 10	0 ... 145	1,8	8452400.0000.00000
	G1 1/4	32	23	0 ... 7	0 ... 101	2,4	8452500.0000.00000
	G1 1/2	40	30	0 ... 4,5	0 ... 65	2,7	8452600.0000.00000
	G2	50	37	0 ... 3	0 ... 43	3,9	8452700.0000.00000

*1) Cv-value (US) ≈ kv value x 1,2

*2) For gases and liquid fluids up to 600 mm²/s (cSt)

*3) Without pilot valve

84520

2/2-way valves – Pressure operated by external fluid

Notes

for 3/2-way pilot valve 84660/84680

Material	Body Aluminium
Pilot fluid temperature	max. +60°C
Pilot pressure	1 ... 10 bar
Standard voltages	24 V d.c., 24 V a.c., 230 V a.c.

Electrical Data

for 3/2-way pilot valve 84660/84680

Design acc. to	DIN VDE 0580
Voltage range	±10%
Duty cycle	100% ED
Protection class	EN 60529 IP65 with mounted socket
Socket	Form A acc. to DIN EN 175301-803 (included)
Technical data	See publication N/en 5.8.640

Further versions on request!

Notes

for 3/2-way pilot vale 97100 hole pattern NAMUR

Material	Body Aluminium elox
Pilot fluid temperature	–10 ... +50°C (+14 ... +122°F)
Pilot pressure	2 ... 8 bar
Standard voltages	24 V d.c., 24 V a.c., 230 V a.c.

Electrical Data

for 3/2-way pilot valve 97100 hole pattern NAMUR

Design acc. to	DIN VDE 0580
Voltage range	±10%
Duty cycle	100% ED
Protection class	EN 60529 IP65 with mounted socket
Socket	Form A acc. to DIN EN 175301-803 (included)
Technical data	See publication N/en 5.4.372

Mounting accessories (NAMUR)

Interface plate NAMUR hole pattern for retrofit

(Part-Number 1256566) consist of:

1x NAMUR-interface plate

2x Adapter screw, 2x O-ring

84720

2/2-way valves – Pressure operated by external fluid

Port size: G1/2 ... 1

Orifice: DN 15 ... 25

Suitable for vacuum up to max. 90%

Suitable for contaminated flow fluid

Optical position indicator is standard

Damped closing

(Valve closes against flow direction)

Reversed flow direction optional

*NPT-connection available:
change 84720 to 84730*



Technical data

Medium:

Neutral gases and liquids

Pilot fluid:

Neutral gases max. +60°C
(*140°F)

Switching function:

Normally closed

Operation:

Pressure actuated
by external fluid

Mounting position:

Optional

Flow direction:

Determined

Port size:

G1/2, G3/4, G1

Pilot connection:

G1/4

Operating pressure:

See table

Pilot pressure:

3.5 ... 10 bar (50 ... 145 psi)

Fluid temperature:

–10 ... +180°C (+14 ... +356°F)

Ambient temperature:

–10 ... +60°C (+32 ... +140°F)

Material:

Process fluid characteristics:

Body: Brass (CW617N)

Seat seal: PTFE

Internal parts: Brass, stainless steel

Spindle sealing: PTFE / FPM, self-adjustable

Pilot fluid characteristics:

Body: Polyamid 66

with glass fibre 30%

Seat seals: NBR

Internal parts: Brass, stainless steel

Standard models

Symbol	Port size	Orifice (mm)	Flow kv value *1) (m³/h)	Operating pressure *2) (bar)	Operating pressure *2) (psi)	Weight (kg) *3)	Model *3)
	G1/2	15	4,8	0 ... 16	0 ... 232	1,3	8472200.0000.00000
	G3/4	20	10	0 ... 8	0 ... 116	1,4	8472300.0000.00000
	G1	25	14	0 ... 5	0 ... 72	1,7	8472400.0000.00000

*1) Cv-value (US) ≈ kv value x 1,2

*2) For gases and liquid fluids up to 600 mm²/s (cSt)

*3) Without pilot valve

Notes

for 3/2-way pilot valve 84660/84680

Material	Body aluminium
Pilot fluid temperature	max. +60°C (+140°F)
Pilot pressure	1 ... 10 bar (14.5 ... 145 psi)
Standard voltages	24 V d.c., 24 V a.c., 230 V a.c.

Notes

for 3/2-way pilot valve 97100 hole pattern NAMUR

Material	Body aluminium elox
Pilot fluid temperature	–10 ... +50°C (+14 ... +122°F)
Pilot pressure	2 ... 8 bar (29 ... 116 psi)
Standard voltages	24 V d.c., 24 V a.c., 230 V a.c.

Electrical data

for 3/2-way pilot valve 84660/84680

Design	acc. to DIN VDE 0580
Voltage range	±10%
Duty cycle	100% ED
Protection class	EN 60529 IP65 with mounted socket
Socket	Form A acc. to DIN EN 175301-803 (included)
Technical data	See publication N/en 5.8.640

Further versions on request!

Electrical data

for 3/2-way pilot valve 97100 hole pattern NAMUR

Design	acc. to DIN VDE 0580
Voltage range	±10%
Duty cycle	100% ED
Protection class	EN 60529 IP65 with mounted socket
Socket	Form A acc. to DIN EN 175301-803 (included)
Technical data	See publication N/en 5.4.372

Mounting accessories (NAMUR)

Interface plate NAMUR hole pattern for retrofit (Part-Number 1256566) consist of:

1x NAMUR-interface plate

2x Adapter screw, 2x O-ring

84740

2/2-way valves – Pressure operated by external fluid

Port size: G1/2 ... 1**Orifice:** DN 15 ... 25**Suitable for vacuum up to max. 90%****Suitable for contaminated flow fluid****Optical position indicator is standard****Damped closing****(Valve closes against flow direction)****Reversed flow direction optional***NPT-connection available:
change 84740 to 84750***Stainless Steel****Technical data****Medium:**

Aggressive gases and liquids

Pilot fluid:Neutral gases max. +60°C
(+140°F)**Switching function:**

Normally closed

Operation:Pressure actuated
by external fluid**Mounting position:**

Optional

Flow direction:

Determined

Port size:

G1/2, G3/4, G1

Pilot connection:

G1/4

Operating pressure:

See table

Pilot pressure:

3,5 ... 10 bar (50 ... 145 psi)

Fluid temperature:

-10 ... +180°C (+14 ... +356°F)

Ambient temperature:

-10 ... +60°C (+32 ... +140°F)

Material:Process fluid characteristics:

Body: Stainless steel

Seat seal: PTFE

Internal parts: Stainless steel

Spindle sealing: PTFE / FPM,
self-adjustable**Material:**Pilot fluid characteristics:

Body: Polyamid 66

with glass fibre 30%

Seat seals: NBR

Internal parts: Brass, stainless
steel**Standard models**

Symbol	Port size	Orifice (mm)	Flow kv value *1) (m³/h)	Operating pressure *2) (bar)	Operating pressure *2) (psi)	Weight (kg) *3)	Model *3)
	G1/2	15	4,8	0 ... 16	0 ... 232	1,3	8474200.0000.00000
	G3/4	20	10	0 ... 8	0 ... 116	1,4	8474300.0000.00000
	G1	25	14	0 ... 5	0 ... 72	1,7	8474400.0000.00000

*1) Cv-value (US) ≈ kv value x 1,2

*2) For gases and liquid fluids up to 600 mm²/s (cSt)

*3) Without pilot valve

Notes**for 3/2-way pilot valve 84660/84680**

Material	Body aluminium
Pilot fluid temperature	max. +60°C (+140°F)
Pilot pressure	1 ... 10 bar (14.5 ... 145 psi)
Standard voltages	24 V d.c., 24 V a.c., 230 V a.c.

Notes**for 3/2-way pilot valve 97100 hole pattern NAMUR**

Material	Body aluminium elox
Pilot fluid temperature	-10 ... +50°C (+14 ... +122°F)
Pilot pressure	2 ... 8 bar (29 ... 116 psi)
Standard voltages	24 V d.c., 24 V a.c., 230 V a.c.

Electrical data**for 3/2-way pilot valve 84660/84680**

Design	acc. to DIN VDE 0580
Voltage range	±10%
Duty cycle	100% ED
Protection class	EN 60529 IP65 with mounted socket
Socket	Form A acc. to DIN EN 175301-803 (included)
Technical data	See publication N/en 5.8.640

Further versions on request!

Electrical data**for 3/2-way pilot valve 97100 hole pattern NAMUR**

Design	acc. to DIN VDE 0580
Voltage range	±10%
Duty cycle	100% ED
Protection class	EN 60529 IP65 with mounted socket
Socket	Form A acc. to DIN EN 175301-803 (included)
Technical data	See publication N/en 5.4.372

Mounting accessories (NAMUR)Interface plate NAMUR hole pattern for retrofit (Part-Number 1256566)
consist of:

1x NAMUR-interface plate

2x Adapter screw, 2x O-ring

84660/84680

3/2-way valves – Indirectly solenoid operated

Orifice: DN 1.6 and 3

Noiseless exhaust

Low power consumption

Complete with connector and gasket

Solenoid interchangeable without tools (Click-on®)

Control valve for angle seat valves

NPT-connection available:

change 84660 to 84670

change 84680 to 84690



Click-on®



Technical data

Medium:

Filtered, lubricated
resp. non-lubricated air
or neutral liquid fluids

Switching function:

Normally closed

Operation:

Indirectly solenoid actuated

Mounting position:

Optional, preferably solenoid
vertical on top

Flow direction:

Determined

Port size:

DN 1.6, DN 3

Operating pressure:

1 ... 10 bar (14 ... 145 psi)

Fluid temperature:

–10 ... +60°C (+14 ... +140°F)

Ambient temperature:

–10 ... +60°C (+14 ... +140°F)

Material:

Body: Aluminium

Seat seal: TPU

Internal parts: Stainless steel,

PPS

Standard models

Symbol	Orifice (mm)	Port size		Flow *2) (l/min)	Operating pressure (bar)	Switching time (ms) *3)		Weight (kg)	Model Solenoid in V d.c.	Model Solenoid in V a.c.
		Inter- nal P	Exter- nal R			On	Off			
	1.6	G1/4	*1)	G1/4	1,2	1 ... 10	8,5	30,4	0,47	8466000.9101.xxxxx
	3	G1/4	*1)	G1/4	3,3	1 ... 10	15	81,9	0,45	8468000.9151.xxxxx

xxxxx Please insert voltage and frequency codes

*1) Noiseless exhaust

*2) Cv-value (US) ≈ kv value x 1,2

*3) At 6 bar acc. to DIN VDI 3290 with solenoid in d.c.

Standard solenoid systems

Voltage and Frequency Solenoid 9101 *1)					
Code	Code	Voltage	Frequency	Power consumption	
Voltage	Frequency			Inrush	Holding
024	00	24 V d.c.	-	8 W	8 W
024	50	24 V a.c.	50 Hz	15 VA	12 VA
110	50	110 V a.c.	50 Hz	15 VA	12 VA
120	60	120 V a.c.	60 Hz	15 VA	12 VA
230	50	230 V a.c.	50 Hz	15 VA	12 VA
Voltage and Frequency Solenoid 9151 *1)					
024	00	24 V d.c.	-	18 W	18 W
024	50	24 V a.c.	50 Hz	45 VA	35 VA
110	50	110 V a.c.	50 Hz	45 VA	35 VA
120	60	120 V a.c.	60 Hz	45 VA	35 VA
230	50	230 V a.c.	50 Hz	45 VA	35 VA



*4) c_{us} coil only; ambient temperature max. +50°C

Further versions on request!

Electrical details for all solenoid systems

Design	DIN VDE 0580
Voltage range	±10%
Duty cycle	100% ED
Protection class	EN 60529 IP65
Socket	Form A acc. to DIN EN 175301-803 (included)

According to DIN VDE 0580 at a solenoid temperature of +20°C (+68°F).
At operating state temperature the input power of a coil decreases by up to
ca. 30% due to physical reasons.

Additional solenoid systems for hazardous areas


ATEX category	ATEX protection class	IP protection class	Solenoid	Standard voltages
II 2G II 2D	Ex eb mb IIC T4 Gb Ex mb tb IIIB T125°C Db	IP66	6106	24 V d.c., 110 V a.c., 230 V a.c.
II 2G II 2D	Ex eb mb IIC T3 Gb Ex mb tb IIIB T140°C Db	IP66	6120	24 V d.c., 110 V a.c., 230 V a.c.
II 3G II 3D	Ex ec IIC T4 Gc Ex tc IIIC T130°C Dc	IP65	9116	24 V d.c., 110 V a.c., 230 V a.c.
II 3G II 3D	Ex ec IIC T4 Gc Ex tc IIIC T130°C Dc	IP65	9176	24 V d.c., 110 V a.c., 230 V a.c.

Attention!

The conditions imposed on the Ex approvals lead to reduction of the permissible
standard temperature ranges in the cases of explosion protected solenoids.



Engineering
GREAT Solutions



Pulse valves and controls for dust collector systems

PRODUCTS

89	Fast Find Guide	
91	2/2-way valves G1/4, pneumatic controllers	82870
92	2/2-way valves DN 20 ... 80, remote pilot operated, aluminium	82900
93	2/2-way valves DN 20 ... 80, solenoid pilot operated, aluminium	82960
95	2/2-way valves DN 20 ... 40, remote pilot operated, stainless steel	83300
96	2/2-way valves DN 20 ... 40, solenoid pilot operated, stainless steel	83320
98	2/2-way valves DN 25 ... 40, remote pilot operated, compression f.	83640
99	2/2-way valves DN 25 ... 40, solenoid pilot operated, compression f.	83670
100	2/2-way valves DN 25 ... 65, solenoid pilot operated, with blow tube	83920
101	2/2-way valves DN 20 ... 65, remote pilot operated, with blow tube	83930

Fast Find Guide

2/2-way valves

82870
G1/4
remote pilot operated,
pneumatic controllers



Page 91

82900
DN 20 ... 80
remote pilot operated,
aluminium



Page 92

82960
DN 20 ... 80
solenoid pilot operated,
aluminium



Page 93

83300
DN 40 ... 80
remote pilot operated
(single stage), stainless steel



Page 95

83320
DN 40 ... 80
solenoid pilot operated (single
stage), stainless steel



Page 96

83640
DN 20 ... 80
remote pilot operated,
compression fitting



Page 98

83670
DN 20 ... 80
solenoid pilot operated,
compression fitting



Page 99

83920
DN 20 ... 80
solenoid pilot operated,
with blow tube



Page 100

83930
DN 40 ... 80
remote pilot operated
(single stage), with blow tube



Page 101

82870

Pneumatic controllers – Pneumatically operated

Port size: Internal thread

P = G1/8, Z = G1/4

Compact design

Ideal for use in hazardous zones

**Fully pneumatic controller,
suitable for robust operation**

Switching time and interval adjustable



Technical data

Fluid (control section):

Filtered air – compressed air supply via conditioning unit with a 5 ... 10 µm filter, without oiler (for unpurified compressed air we recommend an additional 50 ... 75 µm primary filter)

Reproducibility:

±5%

Mounting position:

Optional

Interval:

Adjustable 2 ... 200 s, set on about 10 s in factory

Pulse time:

Adjustable 30 ... 1.000 ms, approx ca. 200 ms

Temperature range:

0 ... +70°C (+32 ... +158°F).

–25 ... +70°C (–13 ... +158°F)

for dry air

Ambient temperature:

–20 ... +40°C (–4 ... +104°F)

Protection class:

II 2GD c IIB T85°C

I M2c

Material:

Body: Grey cast iron

Standard models

Wiper arm (valve venting) operated by spring return in the cylinder

Symbol	Number of control ports *1)	Control section pressure port P	Operating pressure control section		Operating section control port Z	Operating pressure operating section		Weight (kg)	Model
			(bar)	(psi)		(bar)	(psi)		
	10	G1/8	2 ... 8	29 ... 116	G1/4	0,5 ... 8	7,25 ... 116	7,8	8287054.0000.00000
	12	G1/8	2 ... 8	29 ... 116	G1/4	0,5 ... 8	7,25 ... 116	7,8	8287154.0000.00000
	14	G1/8	2 ... 8	29 ... 116	G1/4	0,5 ... 8	7,25 ... 116	7,8	8287254.0000.00000
	16	G1/8	2 ... 8	29 ... 116	G1/4	0,5 ... 8	7,25 ... 116	10,9	8287354.0000.00000
	20	G1/8	2 ... 8	29 ... 116	G1/4	0,5 ... 8	7,25 ... 116	10,9	8287554.0000.00000

*1) Control ports not required have to be sealed with a plug.



ATEX category Protection class

II 2GD
⊕ II 2 GD c IIB T85°C
⊕ I M2c

82900

2/2-way valves – Remote pilot operated

- Port size: G3/4 ... 3
- Orifice: DN 20 ... 80
- Clear, compact design
- One-piece diaphragm
- High flow rate
- Easy to maintain

*NPT-connection available:
change 82900 to 82910*



Technical data

Medium: Air	Mounting position: Optional	Pilot connection: G1/8	Material: Body: Aluminium Seat seal: TPE
Switching function: Normally closed	Port size: G3/4, G1, G1 1/2, G2, G2 1/2, G3	Dusty gas temperature: –20 ... +85°C (–4 ... +185°F)	
Operation: Remote pilot operated	Operating pressure: 0,4 ... 7/8 bar (5,8 ... 101/116 psi)	Coil gas temperature: –40 ... +85°C (–40 ... +185°F)	
Flow direction: Determined		Ambient temperature: –20 ... +85°C (–4 ... +185°F)	

Standard models

Symbol	Port size	Orifice (mm)	Valve length (mm)	Flow kv value *1) (m³/h)	Operating pressure (bar)	Weight (kg)	Model
	G3/4	20	95	18	0,4 ... 8	0,32	8290300.0000.00000
	G1	25	95	22	0,4 ... 8	0,29	8290400.0000.00000
	G1 1/2	40	135	59	0,4 ... 8	0,97	8290600.0000.00000
	G2	50	170	80	0,4 ... 8	1,79	8290700.0000.00000
	G2 1/2	65	170	93	0,4 ... 8	2,07	8290800.0000.00000
	G3	80	239,5	144	0,4 ... 7	3,7	8290900.0000.00000

*1) Cv-value (US) ≈ kv value x 1,2

82960

2/2-way valves – Solenoid pilot operated

Port size: G3/4 ... 3

Orifice: DN 20 ... 80

Clear, compact design

One-piece diaphragm

High flow rate

All internal components captive

Solenoid interchangeable without tools (*Twist-on*[®])

Integrated silencer

*NPT connection available:
change 82960 to 82970*



*Also available
for solenoid version low
temperature up to -40°C
(-40°F)!*



Twist-on[®]



Technical data

Medium:

Air

Switching function:

Normally closed

Operation:

Solenoid pilot operated

Flow direction:

Determined

Mounting position:

Optional, preferably solenoid
vertical on top

Port size:

G3/4, G1, G1 1/2,
G2, G2 1/2, G3

Operating pressure:

0,4 ... 7/8 bar (5,8 ... 101/116 psi)

Dusty gas temperature:

-20 ... +85°C (-4 ... +185°F)

Coil gas temperature:

-40 ... +85°C (-40 ... +185°F)

Ambient temperature:

-20 ... +85°C (-4 ... +185°F)

Material:

Body: Aluminium

Seat seal: TPE

Internal parts: TPU

Standard models

Symbol	Port size	Orifice (mm)	Valve length (mm)	Flow kv value *1) (m³/h)	Operating pressure (bar)	Operating pressure (psi)	Weight (kg)	Model Solenoid in V d.c./a.c.
	G3/4	20	95	18	0,4 ... 8	5,8 ... 116	0,5	8296300.8171.xxxxx
	G1	25	95	22	0,4 ... 8	5,8 ... 116	0,47	8296400.8171.xxxxx
	G1 1/2	40	135	59	0,4 ... 8	5,8 ... 116	1,18	8296600.8171.xxxxx
	G2	50	169	80	0,4 ... 8	5,8 ... 116	2,02	8296700.8171.xxxxx
	G2 1/2	65	169	93	0,4 ... 8	5,8 ... 116	2,3	8296800.8171.xxxxx
	G3	80	239,5	172	0,4 ... 7	5,8 ... 101	2,93	8296900.8171.xxxxx

xxxxx Please insert voltage and frequency codes

*1) Cv-value (US) ≈ kv value x 1,2

82960

2/2-way valves – Solenoid pilot operated

Standard solenoid systems

Voltage and Frequency Solenoid 8171 *2)					
Code Voltage	Code Frequency	Voltage	Frequency	Power consumption Inrush	Holding
024	00	24 V d.c.	-	12 W	12 W
024	50	24 V a.c.	50 Hz	23 VA	16 VA
110	50	110 V a.c.	50 Hz	23 VA	16 VA
120	60	120 V a.c.	60 Hz	23 VA	16 VA
230	50	230 V a.c.	50 Hz	23 VA	16 VA

*2)  US coil only

Additional solenoid systems

Option	Solenoid	Standard voltages
Solenoid version for low temperature –40°C (–40°F)	9151	24 V d.c., 110 V a.c., 230 V a.c.
Pulse Solenoid	8821	24 V d.c., 110 V a.c., 230 V a.c.
Solenoid version for low temperature –40°C (–40°F)	8001	24 V d.c., 110 V a.c., 230 V a.c.

Electrical details for all solenoid systems

Design	DIN VDE 0580
Voltage range	±10%
Duty cycle	100% ED
Protection class	EN 60529 IP65
Socket	Form A acc. to DIN EN 175301-803 (included)

According to DIN VDE 0580 at a solenoid temperature of +20°C (+68°F).
At operating state temperature the input power of a coil decreases by up to ca. 30% due to physical reasons.

Additional solenoid systems for hazardous areas

ATEX category	ATEX protection class	IP protection class	So- lenoid	Standard voltages
II 2G II 2D	Ex d mb IIC T4/T5 Gb Ex tb IIIC T130°C/T95°C Db up to DN 25: Operating pressure 0,5 ... 16 bar (7,25 ... 232 psi) from DN 32: Operating pressure 0,5 ... 10 bar (7,25 ... 145 psi)	IP66	468x	24 V d.c., 110 V a.c., 230 V a.c.
II 3G II 3D	Ex ec IIC T4 Gc Ex tc IIIC T130°C DC	IP65	8176	24 V d.c., 110 V a.c., 230 V a.c.
II 2G II 2D	Ex eb mb IIC T4 Gb Ex mb tb IIIB T135°C Db	IP66	6176	24 V d.c., 110 V a.c., 230 V a.c.

Attention!

The conditions imposed on the Ex approvals lead to reduction of the permissible standard temperature ranges in the cases of explosion protected solenoids.

83300

2/2-way valves – Remote pilot operated

Port size: G3/4 ... 1 1/2

Orifice: DN 20 ... 40

Clear, compact design

One-piece diaphragm

High flow rate

*NPT-connection available:
change 83300 to 83310*



Stainless Steel

Technical data

Medium:

Air

Switching function:

Normally closed

Operation:

Remote pilot operated

Flow direction:

Determined

Mounting position:

Optional

Port size:

G3/4. G1. G1 1/2

Operating pressure:

0,4 ... 8 bar (5,8 ... 116 psi)

Pilot connection:

G1/8

Dusty gas temperature:

–40 ... +85°C (–40 ... +185°F)

Coil gas temperature:

–20 ... +85°C (–4 ... +185°F)

Ambient temperature:

–40 ... +85°C (–4 ... +185°F)

Material:

Body: Stainless steel (1.4408)

Seat seal: TPE

Standard models

Symbol	Port size	Orifice (mm)	Valve length (mm)	Flow kv value *1) (m³/h)	Operating pressure (bar)	Operating pressure (psi)	Weight (kg)	Model
	G3/4	20	95	18	0,4 ... 8	5,8 .. 116	0,7	8330300.0000.00000
	G1	25	95	22	0,4 ... 8	5,8 .. 116	0,8	8330400.0000.00000
	G1 1/2	40	135	59	0,4 ... 8	5,8 .. 116	2,9	8330600.0000.00000

*1) Cv-value (US) ≈ kv value x 1,2

83320

2/2-way valves – Solenoid pilot operated

- Port size: G3/4 ... 1 1/2
- Orifice: DN 20 ... 40
- Clear, compact design
- One-piece diaphragm
- High flow rate
- All internal components captive
- Solenoid interchangeable without tools (*Twist-on®*)
- Integrated silencer



Twist-on®
Stainless Steel



Technical data

Medium: Air	Mounting position: Optional, preferably solenoid vertical on top	Dusty gas temperature: –20 ... +85°C (–4 ... +185°F)	Material: Body: Stainless steel 1.4408
Switching function: Normally closed		Coil gas temperature: –40 ... +85°C (–40 ... +185°F)	Seat seal: TPE
Operation: Solenoid pilot operated	Port size: G3/4, G1, G1 1/2	Ambient temperature: –20 ... +85°C (–4 ... +185°F)	Internal parts: TPU
Flow direction: Determined	Operating pressure: 0,4 ... 8 bar (5,8 ... 116 psi)		

Standard models

Symbol	Port size	Orifice (mm)	Valve length (mm)	Flow kv value *1) (m³/h)	Operating pressure (bar)	Operating pressure (psi)	Weight (kg)	Model Solenoid in V d.c./a.c.
	G3/4	20	95	18	0,4 ... 8	5,8 ... 116	0,92	8332300.8171.xxxxx
	G1	25	95	22	0,4 ... 8	5,8 ... 116	1,01	8332400.8171.xxxxx
	G1 1/2	40	135	59	0,4 ... 8	5,8 ... 116	3,11	8332600.8171.xxxxx

xxxxx Please insert voltage and frequency codes
*1) Cv-value (US) ≈ kv value x 1,2

Standard solenoid systems

Voltage and Frequency Solenoid 8171 *2)					
Code Voltage	Code Frequency	Voltage	Frequency	Power consumption Inrush	Holding
024	00	24 V d.c.	-	12 W	12 W
024	50	24 V a.c.	50 Hz	23 VA	16 VA
110	50	110 V a.c.	50 Hz	23 VA	16 VA
120	60	120 V a.c.	60 Hz	23 VA	16 VA
230	50	230 V a.c.	50 Hz	23 VA	16 VA

*2)  coil only

Additional solenoid systems

Option	Solenoid	Standard voltages
Solenoid version for low temperature –40°C (–40°F)	9151	24 V d.c., 110 V a.c., 230 V a.c.

Electrical details for all solenoid systems

Design	DIN VDE 0580
Voltage range	±10%
Duty cycle	100% ED
Protection class	EN 60529 IP65
Socket	Form A acc. to DIN EN 175301-803 (included)

According to DIN VDE 0580 at a solenoid temperature of +20°C (+68°F). At operating state temperature the input power of a coil decreases by up to ca. 30% due to physical reasons.

Additional solenoid systems for hazardous areas

ATEX category	ATEX protection class	IP protection class	So-lenoid	Standard voltages
II 2G II 2D	Ex d mb IIC T4/T5 Gb Ex tb IIIC T130°C/T95°C Db up to DN 25: Operating pressure 0,5 ... 16 bar (7,25 ... 232 psi) from DN 32: Operating pressure 0,5 ... 10 bar (7,25 ... 145 psi)	IP66	468x	24 V d.c., 110 V a.c., 230 V a.c.
II 3G II 3D	Ex ec IIC T4 Gc Ex tc IIIC T130°C DC	IP65	8176	24 V d.c., 110 V a.c., 230 V a.c.
II 2G II 2D	Ex eb mb IIC T4 Gb Ex mb tb IIIB T135°C Db	IP66	6176	24 V d.c., 110 V a.c., 230 V a.c.

Attention!

The conditions imposed on the Ex approvals lead to reduction of the permissible standard temperature ranges in the cases of explosion protected solenoids.

83640

2/2-way valves – Remote pilot operated

- Port size: Compression Fitting
- Orifice: DN 25 ... 40
- Simple mounting
- Clear, compact design
- One-piece diaphragm
- High flow rate



Technical data

Medium: Air	Mounting position: Optional	Operating pressure: 0,4 ... 8 bar (5,8 ... 116 psi)	Material: Body: Aluminium Seat seal: TPE
Switching function: Normally closed	Port size: DN 25, DN 40	Dusty gas temperature: –20 ... +85°C (–4 ... +185°C)	
Operation: Remote pilot operated	Pilot connection: G1/8	Coil gas temperature: –40 ... +85°C (–40 ... +185°C)	Note: Control via separate pilot valve or pilot controller.
Flow direction: Determined		Ambient temperature: –20 ... +85°C (–4 ... +185°C)	

Standard models

Symbol	Orifice (mm)	Flow kv value *1) (m³/h)	Operating pressure (bar)	(psi)	Weight (kg)	Model
	25	22	0,4 ... 8	5,8 ... 116	0,7	8364400.0000.00000
	40	59	0,4 ... 8	5,8 ... 116	1,85	8364600.0000.00000

*1) Cv-value (US) ≈ kv value x 1,2

83670

2/2-way valves – Solenoid pilot operated

Port size: Compression Fitting

Orifice: DN 25 ... 40

High flow rate

Clear, compact design

One-piece diaphragm

Simple mounting

Solenoid interchangeable without tools (*Twist-on*[®])

Twist-on[®]



Technical data

Medium:

Air

Switching function:

Normally closed

Operation:

Solenoid pilot operated

Flow direction:

Determined

Mounting position:

Optional,
preferably solenoid vertical on top

Port size:

DN 25, DN 40

Operating pressure:

0,4 ... 8 bar (5,8 ... 116 psi)

Dusty gas temperature:

–20 ... +85°C (–4 ... +185°F)

Coil gas temperature:

–40 ... +85°C (–40 ... +185°F)

Ambient temperature:

–20 ... +85°C (–4 ... +185°F)

Material:

Body: Aluminium

Seat seal: TPE

Internal parts: TPU

Standard models

Symbol	Orifice (mm)	Flow kv value *1) (m³/h)	Operating pressure (bar)	(psi)	Weight (kg)	Model Solenoid in V d.c./a.c.
	25	22	0,4 ... 8	5,8 ... 116	0,9	8367400.8171.xxxxx
	40	59	0,4 ... 8	5,8 ... 116	2,1	8367600.8171.xxxxx

xxxxx Please insert voltage and frequency codes

*1) Cv-value (US) ≈ kv value x 1,2

Standard solenoid systems

Voltage and Frequency Solenoid 8171 *2)					
Code Voltage	Code Frequency	Voltage	Frequency	Power consumption	
				Inrush	Holding
024	00	24 V d.c.	-	12 W	12 W
024	50	24 V a.c.	50 Hz	23 VA	16 VA
110	50	110 V a.c.	50 Hz	23 VA	16 VA
120	60	120 V a.c.	60 Hz	23 VA	16 VA
230	50	230 V a.c.	50 Hz	23 VA	16 VA

*2) US coil only

Electrical details for all solenoid systems

Design	DIN VDE 0580
Voltage range	±10%
Duty cycle	100% ED
Protection class	EN 60529 IP65
Socket	Form A acc. to DIN EN 175301-803 (included)

According to DIN VDE 0580 at a solenoid temperature of +20°C.

At operating state temperature the input power of a coil decreases by up to ca. 30% due to physical reasons.

Additional solenoid systems for hazardous areas

ATEX category	ATEX protection class	IP protection class	Solenoid	Standard voltages
II 2G II 2D	Ex eb mb IIC T6...T4 Gb Ex tb IIIC T130°C Db	IP66	42xx	24 V d.c., 110 V a.c., 230 V a.c.
II 2G II 2G II 2D	Ex d mb IIC T6/T5/T4 Gb Ex e mb IIC T6/T5/T4 Gb Ex tb IIIC T130°C/T95°C/T80°C Db	IP66	46xx	24 V d.c., 110 V a.c., 230 V a.c.
II 3G II 3D	Ex ec IIC T4 Gc Ex tc IIIC T130°C DC	IP65	8176	24 V d.c., 110 V a.c., 230 V a.c.
II 2G II 2D	Ex eb mb IIC T4 Gb Ex mb tb IIIB T135°C Db	IP66	6176	24 V d.c., 110 V a.c., 230 V a.c.

Attention!

The conditions imposed on the Ex approvals lead to reduction of the permissible standard temperature ranges in the cases of explosion protected solenoids.

83920

2/2-way valves – Solenoid pilot operated

Port size: For tank mounting with blow-tube

Orifice: DN 25 ... 65

Clear, compact design

One-piece diaphragm

High flow rate

All internal components captive

Solenoid interchangeable without tools (*Twist-on*)

Integrated silencer

Twist-on



Technical data

Medium:

Neutral gases

Type:

Diaphragm valve requiring differential pressure

Switching function:

Normally closed

Operation:

Solenoid pilot operated valve for cleaning dust filters

Flow direction:

Determined

Mounting position:

Optional, preferably solenoid vertical on top

Port size:

DN 25, DN 40, DN 50, DN 65

Operating pressure:

0,4 ... 8 bar (5,8 ... 116 psi)

Differential pressure:

0,4 bar (5,8 psi) required

Dusty gas temperature:

–20 ... +85°C (–4 ... +185°F)

Coil gas temperature:

–40 ... +85°C (–40 ... +185°F)

Ambient temperature:

–20 ... +85°C (–4 ... +185°F)

Material:

Body: Aluminium

Seat seal: TPE

Internal parts: TPU

Blow-tube: Aluminium

Adapter: Aluminium

Standard models

Symbol	Orifice (mm)	Flow kv value *1) (m³/h)	Operating pressure (bar)	(psi)	Weight (kg)	Model Solenoid in V d.c./a.c.
	25	28	0,4 ... 8	5,8 ... 116	0,47	8392400.8171.xxxxx
	40	74	0,4 ... 8	5,8 ... 116	1,1	8392600.8171.xxxxx
	50	104	0,4 ... 8	5,8 ... 116	1,6	8392700.8171.xxxxx
	65	121	0,4 ... 8	5,8 ... 116	2	8392800.8171.xxxxx

xxxxx Please insert voltage and frequency codes

*1) Cv-value (US) ≈ kv value x 1,2

Standard solenoid systems

Voltage and Frequency Solenoid 8171 *1)					
Code Voltage	Code Frequency	Voltage	Frequency	Power consumption Inrush	Holding
024	00	24 V d.c.	-	12 W	12 W
024	50	24 V a.c.	50 Hz	23 VA	16 VA
110	50	110 V a.c.	50 Hz	23 VA	16 VA
120	60	120 V a.c.	60 Hz	23 VA	16 VA
230	50	230 V a.c.	50 Hz	23 VA	16 VA

*1) US coil only

Additional solenoid systems for hazardous areas

ATEX category	ATEX protection class	IP protection class	Solenoid	Standard voltages
II 2G II 2D	Ex eb mb IIC T6...T4 Gb Ex tb IIIC T130°C Db	IP66	42xx	24 V d.c., 110 V a.c., 230 V a.c.
II 2G II 2G II 2D	Ex d mb IIC T6/T5/T4 Gb Ex e mb IIC T6/T5/T4 Gb Ex tb IIIC T130°C/T95°C/T80°C Db	IP66	46xx	24 V d.c., 110 V a.c., 230 V a.c.
II 3G II 3D	Ex ec IIC T4 Gc Ex tc IIIC T130°C DC	IP65	8176	24 V d.c., 110 V a.c., 230 V a.c.
II 2G II 2D	Ex eb mb IIC T4 Gb Ex mb tb IIIB T135°C Db	IP66	6176	24 V d.c., 110 V a.c., 230 V a.c.

Attention!

The conditions imposed on the Ex approvals lead to reduction of the permissible standard temperature ranges in the cases of explosion protected solenoids.

Electrical details for all solenoid systems

Design	DIN VDE 0580
Voltage range	±10%
Duty cycle	100% ED
Protection class	EN 60529 IP65
Socket	Form A acc. to DIN EN 175301-803 (included)

According to DIN VDE 0580 at a solenoid temperature of +20°C (+68°F).

At operating state temperature the input power of a coil decreases by up to ca. 30% due to physical reasons.

83930

2/2-way valves – Remote pilot operated

Port size: For tank mounting with blow tube

Orifice: DN 25 ... 65

One-piece diaphragm

Clear, compact design

High flow rate



Technical data

Medium:

Neutral gases

Switching function:

Normally closed

Operation:

Remote pilot operated valve for cleaning dust filters

Flow direction:

Determined

Mounting position:

Optional

Port size:

DN 25, DN 40, DN 50, DN 65

Pilot connection:

G1/8

Operating pressure:

0,4 ... 8 bar (5,8 ... 116 psi)

Differential pressure:

0,4 bar required

Dusty gas temperature:

–20 ... +85°C (–4 ... +185°C)

Coil gas temperature:

–40 ... +85°C (–40 ... +185°C)

Ambient temperature:

–20 ... +85°C (–4 ... +185°C)

Material:

Body: Aluminium

Seat seal: TPE







Blow tube: Aluminium

Adapter: Aluminium

Standard models

Symbol	Orifice (mm)	Flow kv value *1) (m³/h)	Operating pressure (bar)	(psi)	Weight (kg)	Model
	25	28	0,4 ... 8	5,8 ... 116	0,26	8393400.0000.00000
	40	74	0,4 ... 8	5,8 ... 116	0,9	8393600.0000.00000
	50	104	0,4 ... 8	5,8 ... 116	1,6	8393700.0000.00000
	65	121	0,4 ... 8	5,8 ... 116	2	8393800.0000.00000


*1) Cv-value (US) ≈ kv value x 1,2

Outside dim. of tank/profile (mm)	Model		plus	Connection kit			
	DN 25 	DN 40 		Hose connector 	Female thread 	Male thread 	Push-in sleeve 
70	8393400. 0000. 00000	—	+	1263648	1263641	1263634	1263628
100				1263649	1263642	1263635	1263629
120				1263652	1263643	1263636	1263630
140				1263653	1263644	1263637	1263609
160				1263655	1263645	1263638	1263631
180				1263656	1263646	1263639	1263632
200				1263657	1263647	1263640	1263633
70	—	8393600. 0000. 00000	+	1263682	1263674	1263666	1263658
100				1263683	1263675	1263667	1263659
120				1263684	1263676	1263668	1263660
140				1263685	1263677	1263669	1263661
160				1263686	1263678	1263670	1263662
180				1263687	1263679	1263671	1263663
200				1263688	1263680	1263672	1263664

Kit not required for use without connection pipe. Please then just give Order-No. for DN 25 or 40 connection
DN 50 and DN 65 – tube and connection on request



Engineering
GREAT Solutions



Proportional valves

PRODUCTS

104 Fast Find Guide

105 2/2-way valves DN 15 ... 20

82880

Fast Find Guide

2/2-way valves

82880

DN 15 ... 20
 Motor operated



Page 05-03

82880

2/2-way valves – Motor operated

Port size: G1/2 ... 1

Low power consumption

Wear-resistant ceramic rotary disc seal

Valve remains in set position when deenergized

Suitable for contaminated fluids



Technical data

Medium:

Neutral gases and liquids

Operation:

Electric motor operated

Mounting position:

Preferably with drive vertical on top $\pm 60^\circ$

Flow direction:

Determined

Port size:

DN 15, DN 20

Operating pressure:

See table

Fluid temperature:

$-10 \dots +90^\circ\text{C}$ ($+14 \dots +194^\circ\text{F}$)

Ambient temperature:

$-10 \dots +40^\circ\text{C}$ ($+14 \dots +104^\circ\text{F}$)


Material:

Body: Brass (CW617N)

Seat seal: NBR

Internal parts: Oxyd-ceramic

Standard models

Symbol	Port size	Nominal Diameter (mm)	Operating pressure		Flow kv value *2) (m ³ /h)	Weight (kg)	Drawing *1) No.	Typ *3)
			(bar)	(psi)				
	G1/2	15	$-0,9 \dots 10$	$-13 \dots 145$	1,1	0,9	8/11	8288200.96xx.xxxxx
	G3/4	20	$-0,9 \dots 6$	$-13 \dots 87$	4,4	1,6	9/12	8288300.96xx.xxxxx
	G1	20	$-0,9 \dots 6$	$-13 \dots 87$	4,4	1,6	9/12	8288400.96xx.xxxxx


*1) Technical data and ordering information see following pages

*2) Cv-value (US) \approx kv value x 1,2

*3) See motor drives for motor Cat no and power supply

*4) Throttle setting with overlap - Not gastight

Stepping motor 9668/9678

Symbol	Port size	Nominal Diameter (mm)	Operating pressure *5)		Flow kv value *2) (m ³ /h)	Weight (kg)	Drawing *1) No.	Typ *3) Motor in V d.c.
			(bar)	(psi)				
	G1/2	15	$-0,9 \dots 16$	$-13 \dots 232$	1,1	0,9	8/10/11	8288200.9668.02400
	G3/4	20	$-0,9 \dots 16$	$-13 \dots 232$	4,4	1,6	9/10/12	8288300.9678.02400
	G1	20	$-0,9 \dots 16$	$-13 \dots 232$	4,4	1,6	9/10/12	8288400.9678.02400

* 5) If operating pressure > 10 bar longer duration possible, avoid long downtimes.

Motor

Motor type	Standard voltage Tolerance $\pm 10\%$ (V)	Frequency (Hz)	Power consumption (VA/W)	Protection class	Torque (Ncm)	Operating time through *6) 90° \leftarrow (s)	Wiring diagram No.	Typ *3) Model-Motor-No.
D.c. motor	24	-	1.5	IP54	120	10 ... 14	1	9615.02400
Synchronous motor	24	50	3	IP54	120	10	3	9636.02450
Stepping motor	24	*7)	5	IP54	120	10	4	9638.02400
Stepping motor	24	-	3,3 max. 9.	IP54	220 *8)	10 ... 11	2	9678.02400
Stepping motor	24	0	3,3 max. 9,1	IP54	120 *9)	5	2	9668.02400

*6) Operating time depends on operating pressure

*7) Nominal stepping frequency 200 Hz

*8) Short duration max. 500 Ncm

*9) Short duration max. 300 Ncm

82880

2/2-way valves – Motor operated

Further technical data for DC motors

Model 9615, 9624

Motor with feedback potentiometer for servo-amplifier

Feedback potentiometer	
Resistor	1 kΩ
Resistor tolerance	± 20 %
Max wiper current	1 mA
Power rating	0,1 W

Only part of the potentiometer's range is used.

Further technical data for DC motors

Model 9638

Operation of the drive is possible via a stepper motor control electronics only.

Motor	bipolar
Power/phase	0.4 A constant current
Stride frequency	200 Hz
Resistance per phase	9 Ω
Inductance per phase	12 mH
Steps for opening angle of 90°	2028

Further technical data for the stepper motor drive with integrated position regulator

Model 9668, 9678

Drive with positioner electronics and analogue interface

Power supply residual ripple	Max. 1.2 Vss
Set point input	0 ... 10 V S1, S2: OFF-OFF Input resistance: approx. 200 kΩhm 0 ... 20 mA S1, S2: ON-OFF Input resistance: approx. 500 Ωhm 4 ... 20 mA S1, S2: ON-ON Input resistance: approx. 500 Ωhm
Position feedback output	0 ... 20 mA S2: OFF Maximum load resistance 500 Ωhm 4 ... 20 mA S2: ON Maximum load resistance 500 Ωhm
Ripple of the input signal	Max. 40 m Vss with voltage signal Max. 0,08 m Ass with current signal
Material	Enclosure: polybutylene terephthalate (PBT) Enclosure cover: polycarbonate Output shaft: 1.4104 Output shaft seal: NBR Cover seal: CR
Required by the customer Plug connection	Cable socket, M12, A-coding 5-pin

If the load torque exceeds a peak value of 300 Ncm for 9668 or 500 Ncm for 9678 even for a short period, the electronics will switch off the drive and thus protect it from overloading. This error status is signalled by the illumination of a red ALARM LED on the circuit board. A brief interruption to the supply voltage confirms the error.

Notes on choice of motor

Buschjost offers various valve designs and a choice of DC, synchronous and stepper motors catering for the wide range of applications of the motorised valve and the customer's needs.

The mechanical contacts of DC motors make them unsuitable for control functions involving a large number of small adjustments. The AC synchronous motors last longer thanks to their absence of contacts. A stepper motor has to be used where frequent and/or fine adjustment is required. The following table shows the characteristics of the components used.

Motor design		Motor life (running life) (Count 90° cycle)	Recommended pulse duration	Recommended interval with-out current during reversal in direction of rotation
		up to	(ms)	(ms)
d.c. motor	9615	90.000	> 100	600
Synchronous motor	9636	180.000	> 100	40
Stepping motor	9638	180.000	Stepping frequency 200 Hz	-
Stepping motor	9668	250.000	-	-
Stepping motor	9678	90.000	-	-

Further drive models and electronic controllers available on request

Flow regulation kit available on request

82880

2/2-way valves – Motor operated

Wiring diagrams

d.c. motor	9615
Wiring	
+ to 1 – to 2	Direction of operation CLOSE
+ to 2 – to 1	Direction of operation OPEN


Cutoff at limits provided by microswitches

Resistance between 3 and 4:

minimum value – valve closed


maximum value – valve opened

1



Stepping motor	9668, 9678
Pin 1	Power supply 24 Volt
Pin 2	Power supply 0 Volt
Pin 3	Reference potential for the nominal value input and the position feedback output
Pin 4	Nominal value input 0 – 10 V / 0 (4) – 20 mA
Pin 5	Position feedback output 0 (4) – 20 mA


2

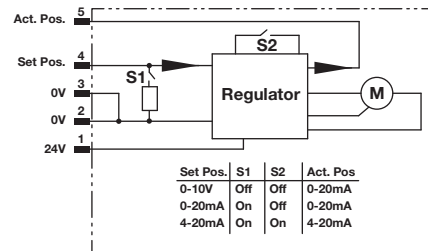

Synchronous motor	9636
Wiring	
2 to 1 and 3 2 unused	Direction of operation CLOSE
2 to 2 and 3 1 unused	Direction of operation OPEN


Cutoff at limits provided by microswitches


3



Stepping motor	9638
Wiring	
1	Motor frame (possibly for screening)
2	Reference potential for contacts
3	Limit feedback signal (OPEN) contact opened at limit
4	Limit feedback signal (CLOSED) contact opened at limit
5 and 6	Connections for phase 1
7 and 8	Connections for phase 2

4





High pressure control

PRODUCTS

110	Fast Find Guide	
111	Dome loaded pressure regulator DN 25	C31
112	Spring loaded pressure reducer DN 20 ... 25	RS5

Fast Find Guide

Pressure regulator

C31

DN 25
Dome loaded pressure
regulator



Page 111

RS5

DN 20 ... 25
Spring loaded pressure
reducer




Page 112

C31

Dome loaded pressure regulator

Port size: G1

Orifice: DN 25

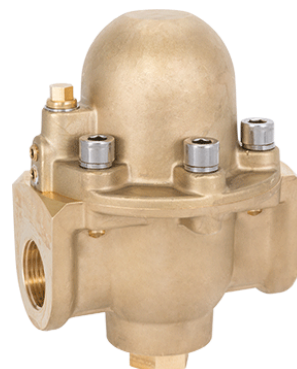

Technical data

The C31 is a balanced valve dome loaded pressure regulator and provides a flow of process fluid at controlled pressure. It is a heavy duty construction, ideally suited for arduous conditions and environments. The outlet pressure is set by adjusting the pressure in the dome. A flexible diaphragm separates the gas in the dome from the process fluid. The valve in the regulator is balanced type. It is a fail safe to closed position. The dome must be charged with air or an inert gas such as nitrogen. The dome can be charged from an external source - this is known as „Mono Loading“. The outlet pressure is substantially unaffected by flow rate or changes in the inlet pressure.

Applications:

This pressure regulator for medium pressure range can be used on a wide outlet pressure range without changing components. For very low pressures a special low pressure version is available offering high accuracy also for this range.

Features:

Balanced valve
Valve size: 12,7 mm
Kv-value: 2,9 (m³/h)
Gauge ports at inlet and outlet

Medium:

For all gases and liquids suitable with brass, especially for O₂ and CO₂

Inlet Pressures:

Max. 100 bar (1450 psi)
Low pressure version max. 25 bar (max. 362 psi)

Leakage:

Standard:
>10-3 mbar/l/sec.
On request up to 10-6 mbar/l/sec. is available with special test

Weight:

4,8 kg

Ambient/Media temperature:

-30 ... +130°C (-34 ... +54°F)

Note:

If used with CO₂ or O₂ only suitable lubricants may be used (e.g. Oxigeno Ex).

Materials:

Body: Brass
Valve pad: NBR / FPM / EPDM
Diaphragm: NBR / FPM / EPDM
O-ring: NBR / FPM / EPDM

Options:

Additional thread in dome center, Version with screwed-in flanges PN 40 or PN 63/PN 100

RS5

Spring loaded pressure reducer

Port size:

3/4" ISO G/NPT

1" NPT, DN 20 ... 25 flanged

Option for non-relieving or relieving



Technical data

The RS5 series spring loaded pressure regulator with diaphragm assembly offer good accuracy and repeatability and safe shut-off at zero flow due to soft seated valve.

Applications:

- Gas mixing
- Gas distribution
- Chemical processing
- Manufacturing processes
- Purging & charging systems
- Air compressors

Medium:

For gaseous and liquid fluids

Maximum inlet pressure:

Max. 100 bar (1450 psi)

Leakage:

Bubble tight (standard, typically 10^{-3} atm.cm³/sec⁻¹)
Helium leak tested to 10^{-6} atm.cm³/sec⁻¹ (on request)

Weight:

4,5 kg

Ambient/

Media temperature:

NBR:

-10 ... +80°C (+14 ... +202°F)

FPM:

-20 ... +150°C (-4 ... +302°F)

EPDM:

-30 ... +130°C (-22 ... +239°F)

Material:

Body: Stainless steel

Valve pad: PCTFE

Diaphragm: NBR

O-ring: NBR

Options:

- Differential pressure version
- Differential pressure version with external sensing
- Gauge ports

We help move
man's **most
marvellous
machines**



Open. Push. Swing. Twist. Lift. Close. We're ideas makers. Creators of motion. Applying our imagination to help you keep your machines moving, in everything from industrial automation to rail. Working with you, we help render your vision real. All the time keeping our eyes on swift service and smart support.

Actuators. Valves. Air Preparation. Fittings.

Just imagine what else we could do for you...
www.imi-precision.com

Engineering
GREAT Solutions

 **IMI NORGRN**

 **IMI BUSCHJOST**

 **IMI FAS**

 **IMI HERION**

 **IMI MAXSEAL**



Note



For further information, scan this QR code or visit
www.imi-precision.com

1

DIRECT ACTING
SOLENOID VALVES



2

INDIRECT ACTING
SOLENOID VALVES



3

PRESSURE OPERATED VALVES
BY EXTERNAL FLUID



4

PULSE VALVES AND CONTROLS
FOR DUST COLLECTOR SYSTEMS



5

PROPORTIONAL VALVES



6

HIGH PRESSURE
CONTROL



Norgren, Buschjost, FAS, Herion and Maxseal
are registered trademarks of IMI Precision
Engineering companies.

Due to our policy of continuous development,
IMI Precision Engineering reserve the right to
change specifications without prior notice.

z8915CT en/11/18

Selected Images used under
license from Shutterstock.com

01802 28 72 45 678

Service-Hotline

*Contact us - Our expert teams
will help with the product or
solution you need*