


Leader of BoT INCELL Co., Ltd.

2020 Energy Storage System Solution & Product Guide




INCELL

INCELL develops and produces ESS (Energy Storage System) based on excellent energy & battery solution technology to solve the energy and environmental problems of the earth. As a member of KEPCO Trust Partnership (KTP), KEPCO is doing its best to develop into a global enterprise in the ESS field from the energy valley led by KEPCO.

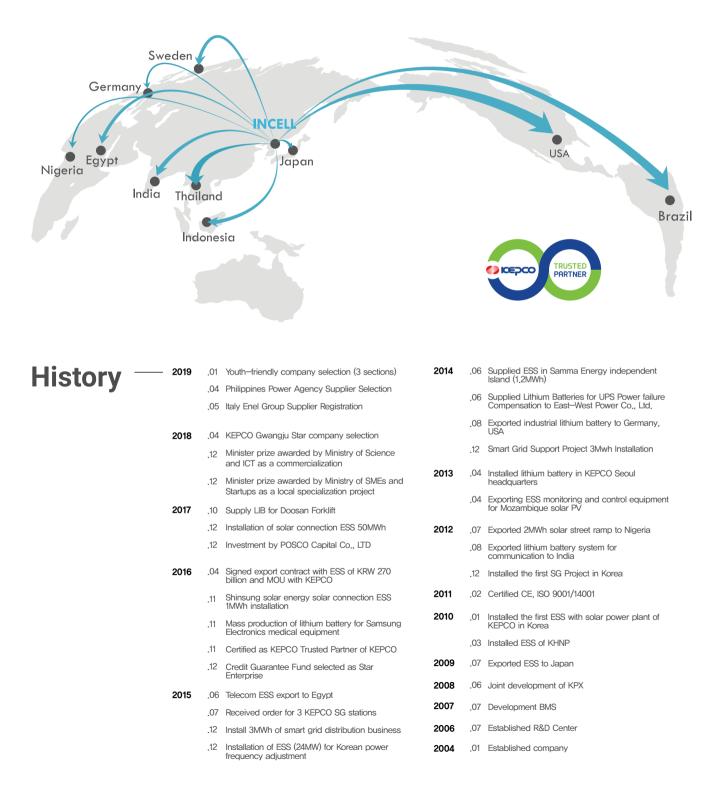

Energy Storage System



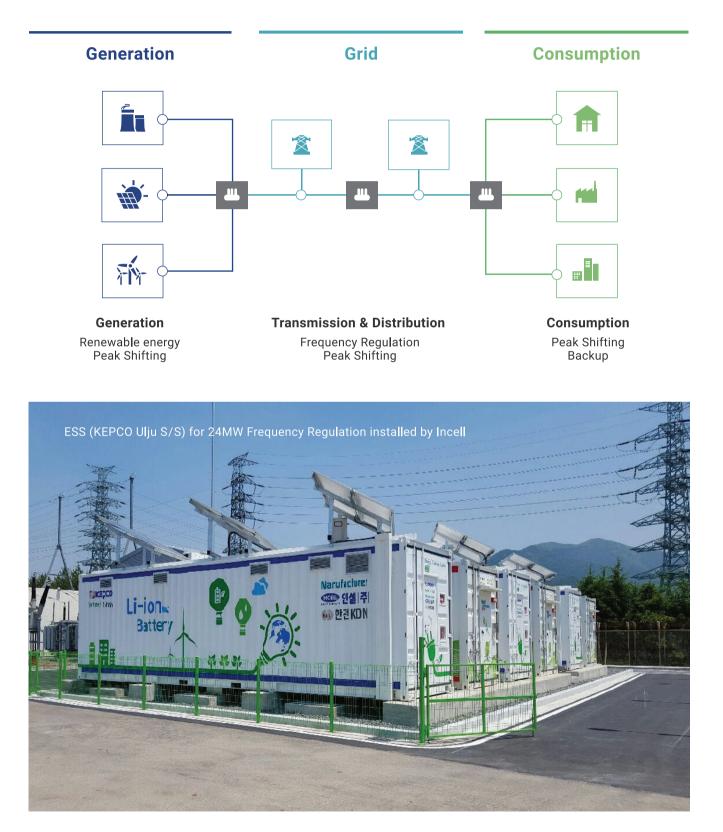

Lithium Battery System

for Utility / Industrial

INCELL's Lithium battery system uses Samsung SDI high performance ESS dedicated cells to achieve high efficiency longevity and provide **multi-stage fire protector** features to guarantee excellent safety.

Features

- Using ESS-only cells
- · Low charging rate ensures safety and longevity
- Off-gas and humidity sensor built into the module to prevent fire
- · Module and rack design to prevent fire spread
- IEC 62619 Certification

Battery Module	Model	SP44-33-195	SP44-41-235	SP44-30T-60
	Voltage	43.6Vdc	43.8Vdc	43.2Vdc
	Energy	8.6kWh	10.8kWh	2.6k₩h
	Capacity	198Ah	246Ah	60Ah
	Size(WHD)mm	459x90x895	472×90×915	472×90×320
	Weight	About 65kg	About 68kg	About 25kg

Battery Rack



Model	LIB-R-06	LIB-R-07	LIB-R-09	
Voltage	872Vdc	876Vdc	864Vdc	
Energy (Design/Useable)	172kWh / 155kWh	215kWh / 195kWh	51.8kWh / 46.6kWh	
Capacity	198Ah	246Ah	60Ah	
Voltage Range	756 ~ 996Vdc (For ESS 768~972Vdc)			
Size(WHD)mm	545x2244x1065	575x2297x973	575x2297x559	
Weight	About 1500kg	About 1600kg	About 750kg	
Model	LIB-R-06-1	LIB-R-07-1	LIB-R-09-1	
Nominal Voltage	741.2Vdc	744.6Vdc	734.4Vdc	
Energy (Design/Useable)	147kWh / 132kWh	183kWh / 166kWh	44kWh / 39.8kWh	
Capacity	198Ah	246Ah	60Ah	
Voltage Range	642 ~ 846Vdc (For ESS 652~826Vdc)			
Size(WHD)mm	545x1994x1065	575x1974x973	575x1974x559	
Weight	About 1300kg	About 1400kg	About 650kg	

* Certification and operational capacity is 95% of the installed capacity.

Battery Safety Technology

New Safety Algorithm

ESS is operated in a harsh environment due to charging/ discharging daily and it requires higher safety measures to protect the system from fire. Incell offers new and enhanced safety technologies to protect the system from fire and prevent fire spread from cell to system.

Cell

- · SAMSUNG SDI's cell for ESS application
- · Enhanced safety feature by adopting CID
- Over 80% of SOC maintained after 15 years

Module

- · Off-gas sensor for early failure detection
- Temperature & humidity sensor for electrical insulator degradation detection
- TR propagation prevention design
- · Enclosed module to prevent flame from escaping

Rack

- Six side enclosed rack for fire spread prevention
- · Door and frame designed for flame escaping prevention
- Gas exhaust duct
- · Make safe separation distance for among racks installation

BMS & Safety Algorithm

- Full charge rate at relatively low SOC for a higher safety and longer life (87.5% compared to competitors)
- Overcharge protection with low charge voltage (4.075V) and step charging scheme.
- Environment monitoring systems and algorithms to enhance the safety and longevity in addition to existing battery safety features








PCS



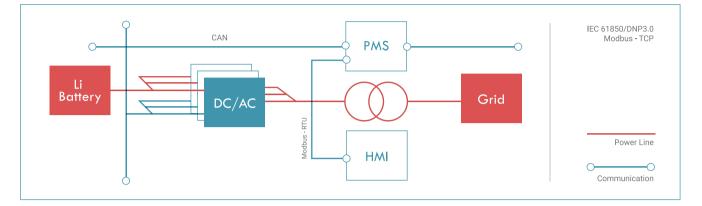


Item	Specification
Power	50/80/100/200/250/500/750/1000kW 0.4/0.8/1.2/1.6/2.0/2.5MW
Voltage Range	L : DC 550V ~ 830V, H:DC 740 ~ 1.100V
Rated efficiency	98%~99%
Rated AC Voltage	350,380,400,440V / ±10%(Operating Range)
Grid Frequency	50 / 60Hz

EMS / PMS

Energy Management System Power Management System

Enerbig[®] is designed based on optimal operation algorithm through big data analysis which is core of power IoT, maximize operating efficiency.

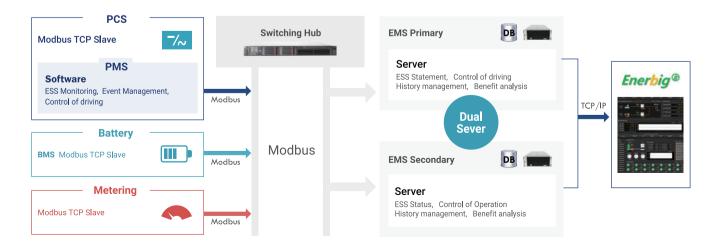

05


Energy Storage System Total Solution

Incell manufactures all components, including Lithium battery, which is the core of ESS, and can offer than 15years of economic and stability required for ESS by carrying out from feasibility analysis, design, construction and after-management.




Provide Total Solution Including Battery – PCS – PMS /EMS

- Solar Power Plant
- Wind Power Plant
- Frequency Regulation
- Emergency Generator
- Building and Factory Power Demand Control

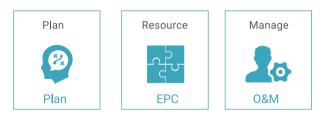

Solar-linked ESS scheme

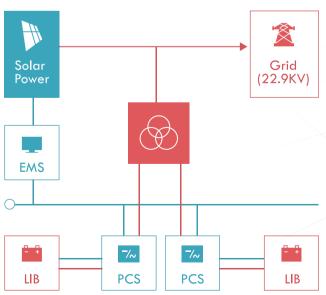





Headquarters

Tel: +82-62-973-5993 , **Fax**: +82-62-973-5997 #1-201 GJTP 333 Cheomdangwagi-ro Buk-Gu Gwangju, Korea 61008

Seoul Office

Tel: +82-70-4272-2463~7 280, Gwangpyeong-ro, Gangnam-gu, Seoul, Republic of Korea

Overseas Office

Japan Branch

301 2-4-2 Shinjuku Shinjuku-ku Tokyo 160-0022 Japan **E-mail** : jrkim@nifty.com

European office

Kistagangen 16, 5tr 164 40 Kista Sweden **E-mail** : stefan.jansson@ince**ll**int.com

