

Chain Conveyor Lubricator


컨베이어 자동 급유기

- Reduce chain pin & bearing wear
- Reduce noise
- Protect contamination of products
- Reduce cost of lubrication
- 체인 핀 & 베어링 마모 저감
- 소음 저감
- 제품 오염 방지
- 윤활비용 저감



◀ Megalube 메가루브

고 점도용 급유기로 Oil viscosity free
설치 및 보전이 간편한 Easy installation & maintenance
개별 식 Individual system

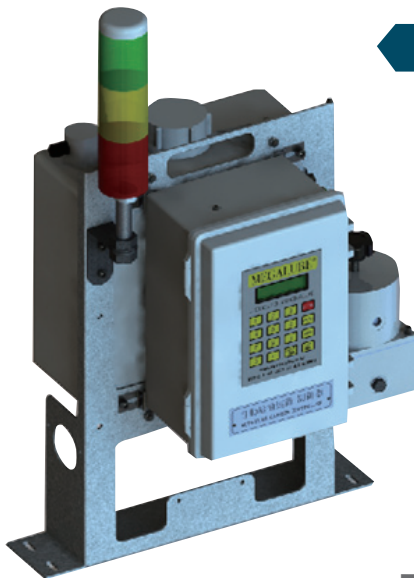

Stalube 스타루브 ▶

저 점도 전용 급유기로 Low oil viscosity
컨베이어 속도에 자유로운 Conveyor speed free
중앙 집중 식 Centralized lube system



EVLUBE®

Since 1987

● 사양 Specification

Specification	Megalube	Stalube
Power	AC 220/110V	AC 220/110V
Current	DC 24V 1.5amp/pump	DC 24V 0.25amp/valve
Pump type	Injection	Ejection
Oil(ISOVG)	20-250	0-30
Nozzle/valve	Max.4 nozzles	Max. 6 nozzles
Conveyor speed /3 inch chain	Max. 15meter /min	Max. 18meter/min
Tank	10 liter	40 liter
Control channel	2 channels	4 channels
Lube on	cycle	time
Lube off	cycle	cycle
Lamp	Green-running Yellow-power Red-error	
Low level sensor	Yes	Yes
Dimension(mm)	300×320×500	375×355×1000

● 모델 Ordering Information


C/V	Megalube	Stalube	Lube point
OHC	ALS-220MEGA/ MR1 H.V	ALC-2000MR1	Chain pin or bearing
	ALS-220MEGA/ MR2 H.V	ALC-2000MR2	Chain pin & bearing
INV(floor)	ALS-220MEGA/ IN1 H.V	ALC-2000IN1	Chain pin or bearing
	ALS-220MEGA/ IN2 H.V	ALC-2000IN2	Chain pin & bearing
NZ	ALS-220MEGA/ NZ H.V	ALC-2000NZ	Chain pin & bearing
SLAT	ALS-220MEGA/ DSL1 H.V	ALC-2000DSL1	Chain pin or bearing
	ALS-220MEGA/ DSL2 H.V	ALC-2000DSL2	Chain pin & bearing
CC	ALS-220MEGA/ CC1 H.V	ALC-2000CC1	Chain pin & roller

Chain Conveyor Greaser

컨베이어 자동 급지기

● 사양 Specification

Power		110V/220V single phase 10Amp
Control electricity		DC 24V 3.5Amp
Valve power consumption		0.25Amp/ea
Air pressure		Min 3kg/cm ³ ~ Max 6kg/cm ³
Pumping pressure		Max. 200bar
Grease Nozzle		Max. 2ea/4ea
Grease type		NLGL No.2
Size(mm)	Greasing Equipment	695(d)x610(w)x380(h)
Weight	Greasing Equipment	45kg+
Conveyor Speed		Max.9M/min



● Ordering Information 주문번호: OHC:LCA-808, Slat:LCA-807



Lubrication Services Devices 윤활 주변기기 전문

Ahwon Corp. Co., Ltd. (주) 아 원

10, Danjeong-ro 76beon-gil, Gunpo-si, Gyeonggi-do, Korea 435-832 경기도 군포시 당정동 326-1
Tel. 82-31-451-0971-3 Fax. 82-31-451-0974 E-mail. ahwon-lube@hanmail.net www.evlube.com